


Quick start MCU-V3RGB

*Control unit for RGB strip
(LEDs with constant voltage).*



CONNECTION DIAGRAM

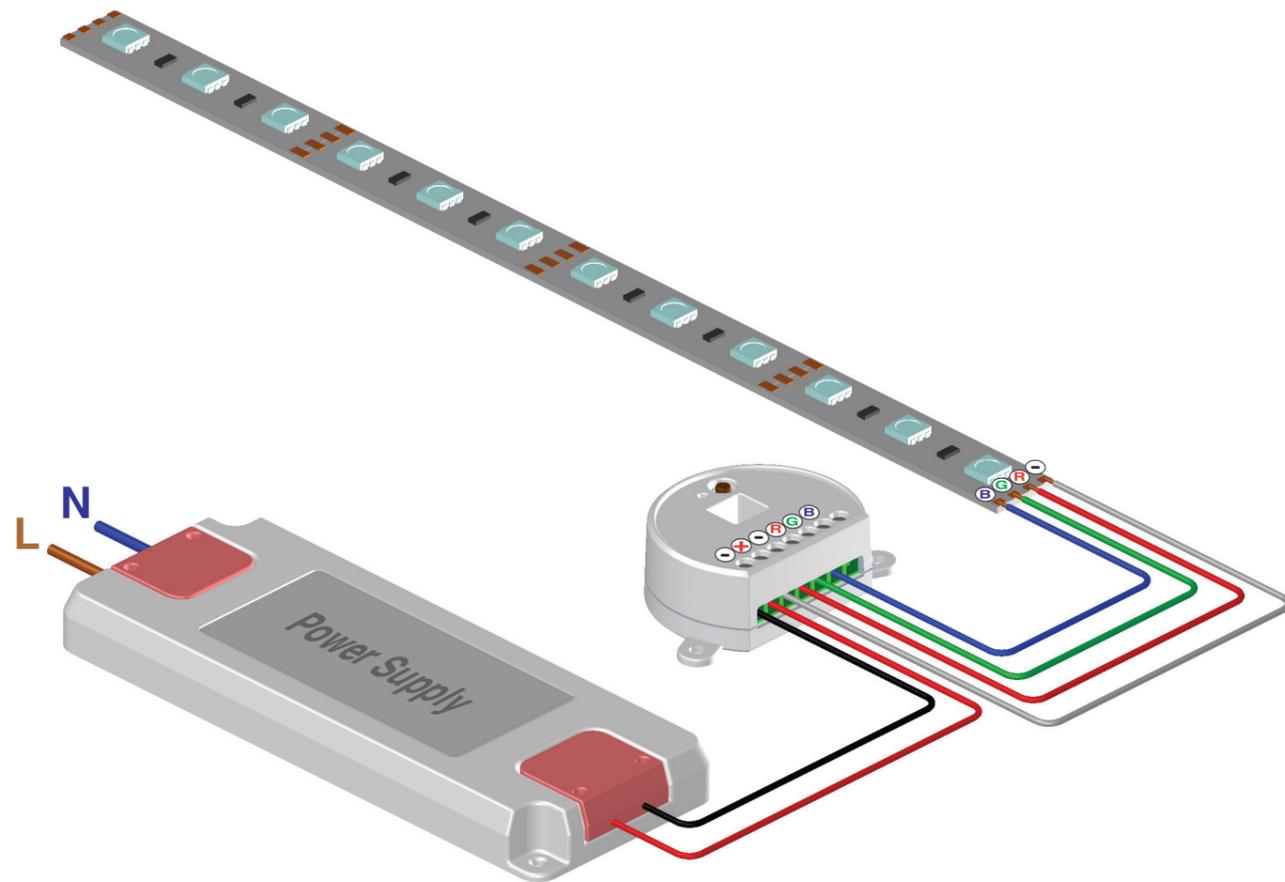

DESCRIPTION

Once the connections are made as in the drawing, the control unit is already operational via wire with the pre-set functions and default settings.

DEFAULT PARAMETERS

The control unit has pre-set parameters for standard operation.

- memo function: disabled
- fade on: 0,5s
- fade off: 0,5s
- timer: none

These settings can be customised, see the full manual.

USE VIA RADIO

To be able to use a transmitter an association must first be made, see procedure on the back

ATTENTION:


See the full manual for the restrictions on use and full features of the control unit

RADIO PROGRAMMING

This procedure lets you programme compatible multifunctional or generic transmitters.

WHICH REMOTE CONTROL DO YOU WANT TO ASSOCIATE WITH THE CONTROL UNIT?

MULTIFUNCTIONAL TRANSMITTERS - MODELS AND CODES

 CODE: HB70-1L	 CODE: HB80-30D, HB80-2L, HB80-4L, HB80-4RGBW, HB80-30RGBW	 CODE: HB90-6LT HB90-6DM HB90-8P	 CODE: TOUCH-1L TOUCH-1DIM TOUCH-1RGBW TOUCH-1CCT
---	---	---	---

With multifunctional transmitters the transmitter control modes depend on the model used. Refer to the transmitter manual, to the paragraph entitled "commands sent by the transmitter", bearing in mind that it is an "rgbw" device.

GENERIC TRANSMITTERS - MODELS AND CODES

 CODE: HB70-5G	 CODE: HB80-6G	 CODE: MCU-TX4	 CODE: TOUCH-1G TOUCH-2G TOUCH-4G
--	---	---	--

With generic transmitters, the transmitter's control modes depend on the function associated with the key during the association procedure. The available function for the key are:

TABLE 5.1 KEY FUNCTIONS OF THE GENERIC TRANSMITTER

POSITION OF DIP IN "STEP 1b" OF THE PROCEDURE	KEY FUNCTION	POSITION OF DIP IN "STEP 1b" OF THE PROCEDURE	KEY FUNCTION
 DIP: OFF ON ON ON	Short pressure= ON / OFF Long pressure= DIMMER UP / DIMMER DOWN	 DIP: ON ON OFF OFF	dimmer colour up / dimmer colour down
 DIP: ON OFF ON ON	ON	 DIP: OFF OFF ON OFF	Play / Stop "ciclo colore" (see paragraph 6.4)
 DIP: OFF OFF ON ON	OFF	 DIP: ON OFF ON OFF	Change duration of "colour cycle" (see paragraph 6.4)
 DIP: ON ON ON OFF	Short pressure= changes colour Long pressure, load off= dimmer colour Long pressure, load on= save colour (see paragraph 6.1)	 DIP: ON OFF OFF OFF	Change effect of "colour cycle" (see paragraph 6.4)
		 DIP: ON OFF OFF OFF	Soft Off 1h: fade off in 1h. (see paragraph 6.2)

PROCEDURE

