

350VP ACRICH

I


DIMMER ELETTRONICO
230Va.c. 50-60Hz ϵ 1E4

1W-85W 
Led Acrich max. 5x17W

Grado di protezione: IP20
Per applicazioni in classe: II
Grado di inquinamento: 2
Tensione nominale di tenuta ad impulso: 2.5kV
Tipo di servizio: Continuo
Tipi di cavo da collegare: H03VVH2-F, H03VV-F, FRDR, FROR 2x0.75
Indice di resistenza alle correnti superficiali: PT1175
Livello prova filo incandescente: 1 (650°C)
Protezione incorporata non sostituibile: Fusibile T1.6A H 250V

ISTRUZIONI DI MONTAGGIO (FIG. 1)

Sguainare e spellare il cavo da collegare come da misure indicate
Collegare l'alimentazione ai morsetti **L** ed **N** della scheda elettronica **D**

Collegare il cavo lampada ai morsetti contrassegnati  della scheda elettronica **D**

Inserire la scheda **D** nella sede della base **E**

Assemblare la piastrina serracavo **C** utilizzando le viti **B**

Assemblare a pressione, alla base **E**, il pulsante **F** e il coperchio **B**

ISTRUZIONI D'USO

Accensione e spegnimento: pressione veloce (inferiore ad 1 sec.)
Regolazione min. - max. : Pressione continua (inversione del senso di dimming ad ogni rilascio e successiva pressione)
Memorizzazione dell'ultima regolazione effettuata.

350VP ACRICH

UK


ELECTRONIC DIMMER
230Va.c. 50-60Hz ϵ 1E4

1W-85W 
Led Acrich max. 5x17W

Degree of protection: IP20
For class II appliances
Pollution degree: 2
Rated impulse withstand voltage: 2.5kV
Duty type : Continuous duty
Type of cables to be connected: H03VVH2-F, H03VV-F, FRDR, FROR
Proof Tracking Index: PT1175
Glow wire test level : 1 (650°C)
Not replaceable built in protection: Fuse T1.6A H 250V

ASSEMBLING INSTRUCTION (FIG. 1)

Strip the cable to be connected respecting the quotes indicated
Connect supply cable to the terminals **L** and **N** of the electronic card **D**

Connect lamp cable to the terminal identified by symbol  of the electronic card **D**

Place the electronic card **D** into the seat of the base **E**

Mount cord anchorage **C** using the screws **B**


Using pressure, mount button **F** and cover **B** to the base **E**

USE INSTRUCTION

ON and OFF: quick pressure (less than 1 sec.)
MIN. and MAX. : Continuous pressure (at every release of the button pressure the direction of the dimming is inverted).
Memorization of the latest setting made.

ART. 350VP ACRICH
H03VVH2-F 2x0.75mm²
H03VV-F 2x0.75mm²
FROR 2x0.75mm²
FRDR 2x0.75mm²

FIG. 1

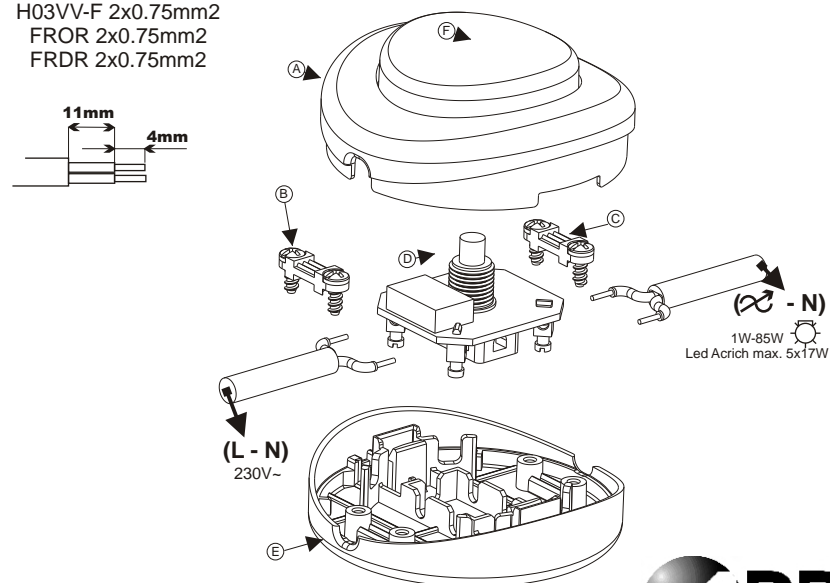

ARDITI S.p.A. Via Caberardi 3, 24012 Val Brembilla (BG) Italy
www.arditi.com - phone +39 0345 52111