

400/T BL PULL

Cod. 042424 -


Interruttore cilindrico unipolare a tirante smontabile con morsetto di terra

Rewireable cylindrical single pole cord-operated switch with earth terminal

NOVITA' - DISPONIBILE / NEW - AVAILABLE

- Design innovativo e brevettato
- Dimensioni compatte

- Innovative and patented design
- Compact dimensions

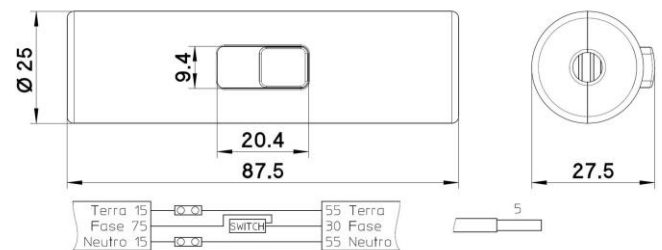

Cod. 042424

Materiale	<i>Material</i>	termoplastico / <i>thermoplastic resin</i>
Tensione nominale	<i>Rated voltage</i>	250V
Carico resistivo	<i>Resistive load</i>	2A
Carico lampada	<i>Tungsten lamp load</i>	0,5A
Corrente nominale	<i>Rated current</i>	max 75W lamp led
Trattamento/Colore	<i>Color/Treatment</i>	nero / <i>black</i>
Tipo e sezione cavi	<i>Type and cross sections</i>	piatti H03VVH2-F 2x0,75mm ² o tondi H03VV-F 2x-3x0,75mm ² piatti H03V2V2H2-F 2x0,75mm ² o tondi H03V2V2-F 2x-3x0,75mm ² T90°C / flat H03VVH2-F 2x0,75mm ² or round cable H03VV-F 2x - 3x0,75mm ² flat H03V2V2H2-F 2x0,75mm ² or round cable H03V2V2F 2x - 3x0,75mm ² T90°C
Presenza morsetto di terra	<i>Earth Terminal</i>	Si / Yes
Dimensioni	<i>Dimensions</i>	diam. 25 x 88 mm
Tipologia morsetti	<i>Terminals</i>	a vite / <i>screw type</i>
Peso pezzo	<i>Item weight</i>	27,8 g.



ITA
Documentazione online
- LINK PAGINA PRODOTTO -



ENG
Online documents
- WEBPAGE LINK -

400/T BL PULL

Cod. 042424 -

ARDITI nell'ambito della normativa tecnica adottata, si riserva il diritto di apportare (in ogni momento e senza obbligo di preavviso) tutte le modifiche che, a proprio insindacabile giudizio, ritenesse opportune per migliorare la funzionalità e le prestazioni dei prodotti, nonché per rispondere a proprie esigenze tecnologiche e produttive. / *Within the framework of the adopted technical standards, ARDITI reserves the right to make all those changes (at any time and without prior notice) that, in its final judgement, are needed to improve the functions and performances of the products, as well as to meet the company's technological and production requirements.*