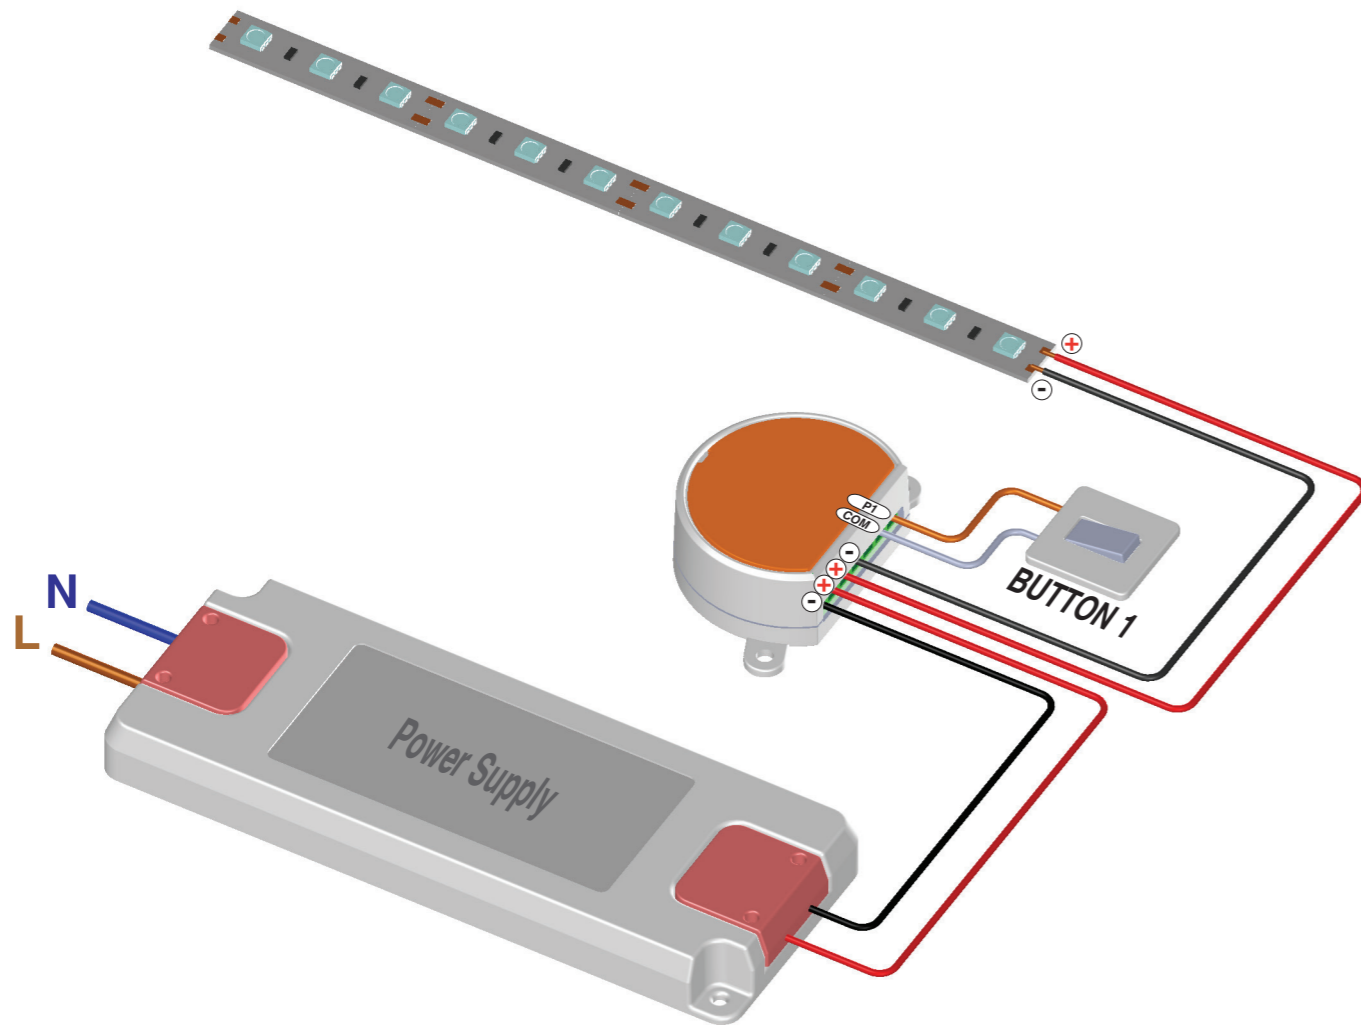


Quick start MCU-V5

Control unit for single colour strip
(LEDs with constant voltage)



CONNECTION DIAGRAM



DESCRIPTION

Once the connections are made as in the drawing, the control unit is already operational via wire with the pre-set functions and default settings.

USE VIA WIRE

The function of the key is pre-set.

Button 1:

short press= On Off strip

long press= dimmer up/down strip

DEFAULT PARAMETERS

The control unit has pre-set parameters for standard operation.

- memo function: disabled
- fade on: 0,5s
- fade off: 0,5s
- timer: none

These settings can be customised,
see the full manual.

USE VIA RADIO

To be able to use a transmitter an association must first be made, see procedure on the back

ATTENTION:


See the full manual for the restrictions on use
and full features of the control unit

RADIO PROGRAMMING


This procedure lets you programme compatible multifunctional or generic transmitters.

WHICH REMOTE CONTROL DO YOU WANT TO ASSOCIATE WITH THE CONTROL UNIT?


MULTIFUNCTIONAL TRANSMITTERS - MODELS AND CODES




CODE:
HB70-1L



CODE:
HB80-30D,
HB80-2L,
HB80-4L,
HB80-4RGBW,
HB80-30RGBW




CODE:
HB90-6DM
HB90-8P




CODE:
TOUCH-1L
TOUCH-1
TOUCH-1CCT

With multifunctional transmitters the transmitter control modes depend on the model used. Refer to the transmitter manual, to the paragraph entitled "commands sent by the transmitter", bearing in mind that it is an "dimmer" device.


GENERIC TRANSMITTERS - MODELS AND CODES




CODE:
HB70-5G



CODE:
HB80-6G










CODE:
MCU-TX4



CODE:
TOUCH-1G
TOUCH-2G
TOUCH-4G

With generic transmitters, the transmitter's control modes depend on the function associated with the key during the association procedure. The available function for the key are:

TABLE 5.1 KEY FUNCTIONS OF THE GENERIC TRANSMITTER

POSITION OF DIP IN "STEP 1b" OF THE PROCEDURE	KEY FUNCTION	POSITION OF DIP IN "STEP 1b" OF THE PROCEDURE	KEY FUNCTION
 DIP: ON ON ON OFF	ON / OFF	 DIP: OFF OFF ON OFF	Short pressure= ON Long pressure= DIMMER UP
 DIP: OFF ON ON ON	Short pressure= ON / OFF Long pressure= DIMMER UP / DIMMER DOWN	 DIP: ON ON OFF OFF	Short pressure= OFF Long pressure= DIMMER DOWN
 DIP: OFF OFF ON ON	OFF	 DIP: ON OFF OFF OFF	Soft Off 1h: fade off in 1h. (see paragraph 7.1)
 DIP: ON OFF ON ON	ON		

PROCEDURE

