

ENGINEERING SPECIFICATION

工程規格書

客戶 / CUSTOMER	:	433 按键开关遥控器 433 Key switch remote
產品名稱 / ITEM	:	control
顏色/Colour	:	Black
客戶編號 / CUSTOMER P/N	:	
擎洲样品申请单号/Samples request No	:	
擎洲产品型號 / OUR MODEL NO.	:	HEK0000277
標準 / STANDARD	:	
額定 / RATING	:	Input: 3.0±0.5 V (锂电池) Imax=10mA max
	:	Output: 发射电流 Imax ≤ 4mA
備注 / REMARKS	:	RoHS STANDARD

根據本公司政策規定,貴司必須於該產品首次生產之前簽回我司規格書的首頁、銘牌共二頁,以確認該產品之規格。

另外,請貴司於下單時在採購單上打上本公司產品編號以及样品单编号,以避免生產錯誤。

如貴司未能如期簽回規格書,我司將無法為該產品安排生產。

為免延誤貴公司之出貨時間,請貴司通力合作。

Based on the policy of our company ,all buyers MUST return this product specification sheets along with signature

And company chop. Please study very carefully and sign the page of Engineering Specification /Nameplate for product confirmation. And also, please mark our products Model No and Samples request No while the PO issue.

NOTICE: This is very important to have this specification sheets confirmed and return to us on time to avoid any mistake

Or delay of delivery. Without your confirmation, Letaron Electronic would not arrange to start the production for your company.

版本 REV.	描述/DESCRIPTION	日期 DATE	制作人 PREPARED BY
00	首次發行/FIRST ISSUE	2022/6/13	彭年

擎洲/LETARON

	制作 Prepared	检查 Checked	核准 Approved
签名 Signature	彭年	徐权	
日期 Date	2022.6.13	2022.6.13	

客戶/CUSTOMER

確認 Approved by	
日期 Date	(簽字或公司蓋章) (Signature and company stamp)

1. Environment(环境):

working temperature of $0^{\circ}\text{C}\sim 45^{\circ}\text{C}$, 10%~90%RH (without dew point);
(工作温度 $0^{\circ}\text{C}\sim 45^{\circ}\text{C}$, 湿度 10%~90%RH (无凝露));

Storage temperature: $-20^{\circ}\text{C}\sim 85^{\circ}\text{C}$, 10%~90%RH (without dew point);
(存储温度 $-20^{\circ}\text{C}\sim 85^{\circ}\text{C}$, 湿度 10%~90%RH (无凝露));

2. Instruction(用法说明):

2-1. Turn off the power connection before installation.(安装前要切断电源).

2-2. Indoor use only. (仅供室内使用).

2-3. Load of the secondary shall not exceed the rated power.(负载不可超过额定功率).

2-4. Installation shall be done by qualified technician.(要有一定专业知识的人才能安装).


2-5. Make sure all the cables connected correctly before turn on the power.

(接通电源前要确定所有的电线连接正确).

2-6. Maximum ambient temperature 45°C , 最大工作环境温度 45°C

3. Externality figure and name plate (外形图及商标):

3-1 外形图

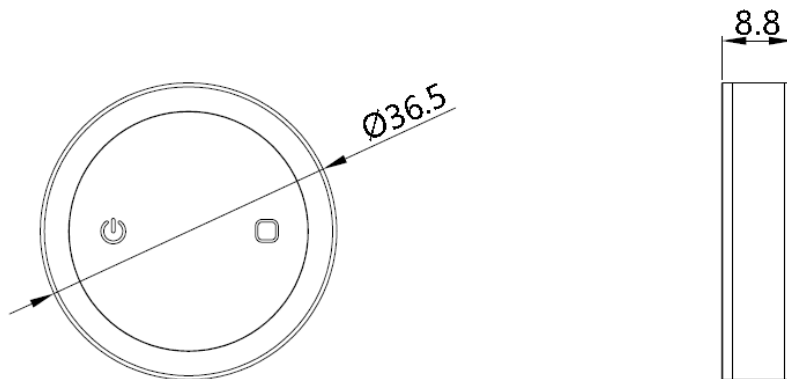

3-2 商标

4. Production test specification(生产测试规格):

序号 Item	测试项目 Test items	测试步骤 Testing procedure	备注 remarks
1	对码测试 Code pairing test	接收器上电; 指示灯闪烁。遥控器同时按住开关键和色温键发射对码, 对码成功接收器指示灯停止闪烁 Power on the receiver; The indicator lamp flashes. Press and hold the ON key and the color temperature key on the remote controller at the same time to transmit the code matching, and the receiver indicator will stop flashing if the code matching is successful	搭配智能控制盒
2	清码测试 Clear code test	长按接收器上按键 8s 以上, 接收器上指示灯闪烁 4 下然后关灭, 清除所有接收器对过码的遥控器。 Press and hold the key on the receiver for more than 8s, the indicator on the receiver flashes for 4 times and then turns off to clear all remote controls that have been coded by the receiver.	
3	对码按键 Code matching button	对码键有配对、开关, 调光或者调色功能。The code matching key has the functions of pairing, switching, dimming or color adjusting.	
4	遥控接收距离测试 Remote control receiving distance test	大于 7m Min	
5	遥控操作 Remote operation	开关键: 按一下开灯, 按一下关灯。长按无极调光 色温键: 短按切换色温, 冷光-暖光-冷暖光循环切换。长按无极调色温。 On/OFF key: press to turn on the light and press to turn off the light. Long press the stepless dimming Color temperature key: short press to switch color temperature, cold light warm light cold warm light cycle switching. Long press the infinite color mixing temperature.	
6	控制数量 Control quantity	按 1 个遥控器控制 5 个控制盒, 一个控制盒控制 5 个遥控器测试。 Press one remote controller to control five control boxes, and one control box to control five remote controllers for testing	

LETARON[®]

擎洲光电科技有限公司
Letaron Electronic Co., LTD

Address: Xiaotiantou Village Xinsi Area Hengli Town, Dongguan City, Guangdong Province, P.R. China

地址: 广东省东莞市横沥镇新四小田头村

Tel: +86 769 89110666 Fax: +86 769 87060909

E-Mail: Sales@letaron-group.com Postcode: 523460 Website: www.letaron-group.com
