

AcTEC LED DRIVER

LIM-25T

SPECIFICATION

Description	220-240V Triac Dimming LED Driver, Constant Current Driver
Electrical Characteristics	Ta = 25°C, 220-240Vrms input, standard reference load; unless otherwise specified
Class II, IP20, thermally protected 110, independent driver	

Product Name	LIM-25T
---------------------	---------

Input Parameters

Rated Input Voltage	Uin	220-240VAC
Input Current (Full load)	Iin	0.16A
Input Frequency	fin	50/60Hz
Maximum Input Power	Pin	32W
Power Factor (Full load)	λ	≥0.95
THD(Full load)		≤25%
Efficiency (Full load)	η	≥82%
No-load power		≤1W
Inrush current		5A&100us (Cold Start)
Turn on time		≤500ms

Output Parameters

Output Voltage	Vout	21-42V
Output Current (Full load)	Iout	350mA±8% 450mA±5% 500mA±5% 600mA±5%
Output Power (Full load)	Pout	25W
Operating Frequency(Full)	Fout	70KHz
Ripple & Noise		≤100mA
Percent flicker		≤3%
Load Regulation		≤5%
Line Regulation		≤5%

Ambient

Storage Temperature	ts	-20 ... + 70°C
Operating Ambient	ta	-20 ... + 45°C
Case Temperature at tc	tc	85°C
Relative humidity		5 ...85%

Protection

No Load	Auto-recovery if fault is removed
Over Load	Auto-recovery if fault is removed
Short Circuit	Auto-recovery if fault is removed

System Parameters

Withstand voltage	3.75KVAC, I leakage<5mA, 60s
Expected Life	50,000Hours



Compliances and approvals

Safety	EN 61347-2-13
RFI	EN 55015
Harmonics	EN 61000-3-2 Class C
Immunity	EN 61547

Note

1. All parameters NOT specially mentioned are measured at 240VAC input, rated load and 25 of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.
3. Expected Life:tc=80°C,0.2%/1000h failure rate

Physical Parameter

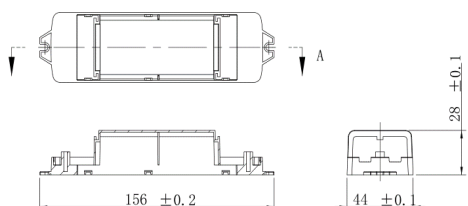

Dimensions(LxWxH): 156x44x28mm

Housing Material:PC Plastic

Captured Terminal Screw for 0.75~2.5mm2