


Poliamide **PA6.6** nera
 Autoestinguente **UL94V0**
GWIT775°C (EN 60695-2-13)
 Temperatura di esercizio **T105°C**
 Contatto in ottone OT58 nichelato
 Guarnizioni in silicone
IP68 per 120h a 4mt

Black polyamide PA6.6
Self-extinguishing UL94V0
GWIT775°C (EN 60695-2-13)
Working temperature of T105°C
Contacts in brass OT58, nickel plated
Silicone waterproof rubbers
IP68 for 120h at 4mt



Approvazioni / *Approvals*

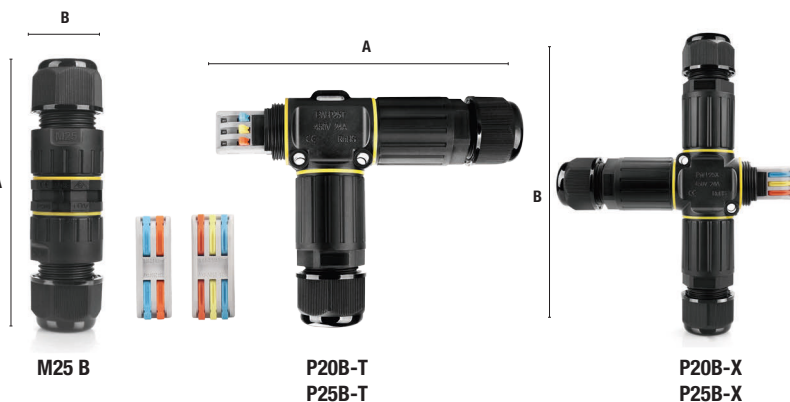

CEI EN 60998-1 / CEI EN 60998-2-1 / CEI EN 62444

Legenda delle quote
Legend for dimensions

Descrizione / <i>Description</i>	Art		Art				Art			
Connettore <i>Connector</i>	M25 B		OK-P20 B				OK-P25 B			
Sagoma <i>Shape</i>	I		T		X		T		X	
Numero poli e codice <i>Number of poles and code</i>	2p	4572200	2p	4570200	2p	4571200	3p	4573300	3p	4574300
Specifiche tecniche <i>Technical characteristics</i>	2,5/4mm ² - 32A - 450V									
	14AWG - 20A - 300V									
A	Lunghezza / <i>Lenght</i>		108 mm	148 mm	148 mm	165 mm	165 mm			
B	Larghezza / <i>Width</i>		30 mm	89 mm	148 mm	100 mm	165 mm			
Accessori / <i>Accessories:</i>										
Diametro foro gommini standard e range dei cavi <i>Standard rubbers diameter and cables range</i>	Ø 8,5 mm (5 - 9 mm)		Ø 8,5 mm (5 - 9 mm)				Ø 8,5 mm (5 - 9 mm)			
Altri gommini disponibili <i>Other available rubbers</i>	Ø 12 mm (9 - 12 mm)		Ø 12 mm (9 - 12 mm)				Ø 12 mm (9 - 12 mm)			
	Ø 14,5 mm (10 - 14 mm)						Ø 14,5 mm (10 - 14 mm)			
Confezione e imballo <i>Packing and box</i>	25 / 250 pz/pcs		20 / 200 pz/pcs				10 / 100 pz/pcs		5 / 50 pz/pcs	