




SWITCH TO BRIGHTER FUTURE

Product data sheet: PW-150-xx Series

Features

- Independent design
- Plastic housing design
- Analogue flicker-free
- Built-in active PFC function
- Constant voltage output
- Primary and secondary sides come with leads
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Differential mode 2kV and common mode 4kV surge immunity
- Suitable for protection class I & II luminaires
- SELV equivalent
- Protection class II
- IP67 design

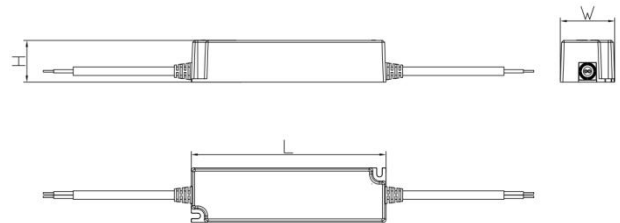

Applications

- Office
- Shop
- Hospitality
- Public areas

Approbations & Certifications

CE

Housing properties

- Housing material: plastic, white.
- Type of protection IP67.

Electrical Specifications

Type		Unit	PW-150-24	PW-150-48
INPUT	Nominal voltage	V	220 – 240	
	Nominal frequency	Hz	50 / 60	
	AC voltage range	V	198 – 264	
	DC voltage range	V	176 - 280	
	Nominal current	A	1.0	
	THD (Full load)	%	≤ 10	
	Power factor (Full load)		0.95	
	Efficiency (Full load)	%	91	92
	Turn on time	ms	≤ 500	
	No load	W	≤ 0.5	
	Standby power	W	N/A	
	Protection class		II	
	Inrush current(Cold start)	A pk	60 (th = 300 μs)	
	Max.units per circuit breaker		B10:3 B13:3 B16:4 B20:6 C10:6 C13:8 C16:10 C20:12	
OUTPUT	Nominal voltage	V	24	48
	Maximum voltage	Vdc	≤ 25	≤ 49
	Output current range	A	0 – 6.25	0 – 3.125
	Voltage accuracy	%	±5	
	Voltage ripple(≤120Hz)	%	≤ 3	
	Pst LM		≤ 1	
	SVM		≤ 0.4	
	Nominal power range	W	0 – 150	
	Maximum power	W	150	
	Galvanic isolation		SELV	
ENVIRONMENT	Ambient temperature range ta	°C	-40 ...+50	
	Maximum case temperature tc	°C	85	
	Max. Case temp. In fault condition	°C	110	
	Storage temperature range	°C	-40 ...+70	
	Relative humidity	%	5 ... 85 (Not condensing)	
	Surge transient protection	kV	2 4 (L/N LN/PE acc to. EN 61547 Clause 5.7)	
	Environmental rating		Indoor/Outdoor	
	IP rating		IP 67	
	Mains switching cycles		> 100,000	
	Expected lifetime	h	50,000 (0.2% / 1'000 h failure rate)	

*All parameters NOT specially mentioned are measured at 230VAC input ,rated current and 25°C of ambient temperature

Protections

Over temperature

Yes

Over load

Yes

No load

Yes

Short circuit

Yes



Input overvoltage

Maximum allowed input voltage 264V AC


Output overcurrent

Yes


OUTPUT LOAD vs TEMPERATURE

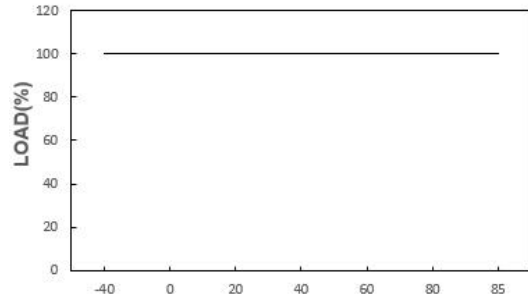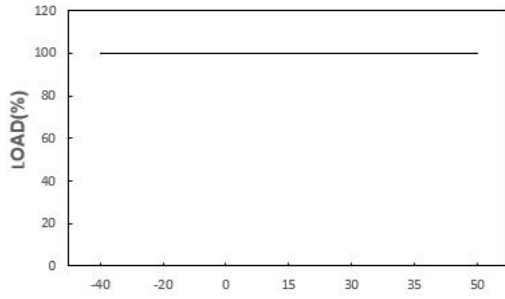


STATIC CHARACTERISTIC

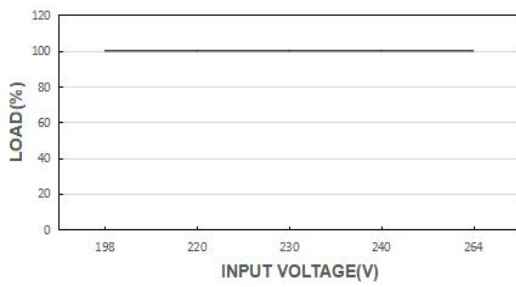


POWER FACTOR (PF) CHARACTERISTIC

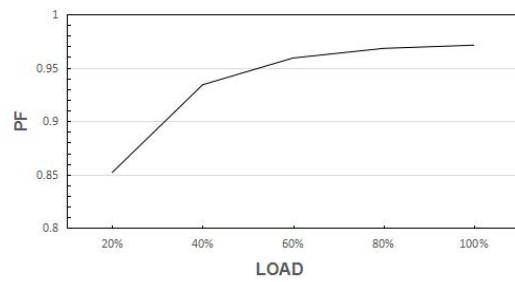


TOTAL HARMONIC DISTORTION (THD)

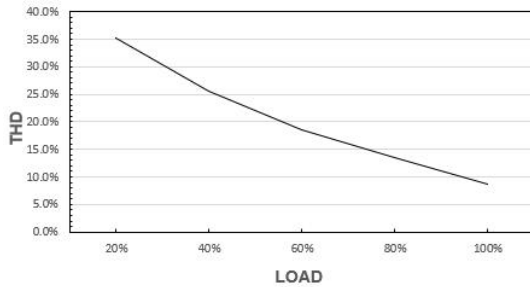

EFFICIENCY vs LOAD

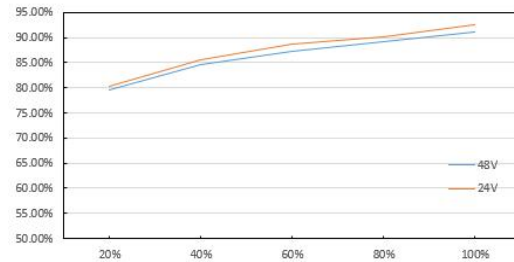


LIFE TIME

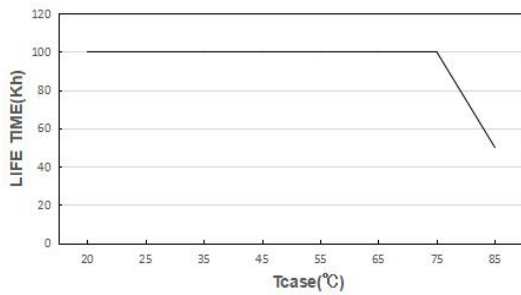

*The graph is for reference only, and the detailed values refer to the parameter table

Wiring Diagram

Max. cable length -system:	2m
Dimensions(LxWxH):	180 x 52 x 32 mm
Mounting hole spacing, length:	170 x 42 mm
Wire length	300 ± 10 mm
Weight:	700g

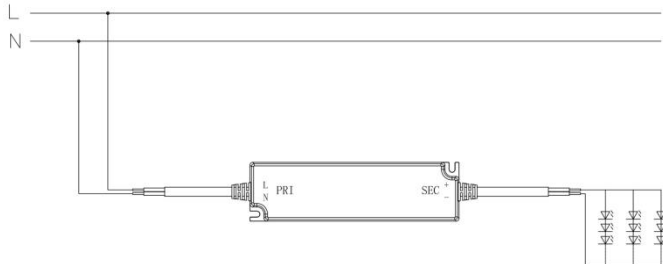

Input wire: VDE H05RN-F 2x1.0mm²; Output wire: VDE H05RN-F 2x1.0mm².

Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs.

Remarks

-**Touch current:** lower than 0.7 mA, according to EN 60598-1 annex. G and EN 61347-1 annex A

Standards

EN 61347-1
EN 61347-2-13
EN 62384
EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61547
EN 60598-1
IEEE1789
(EU) 2019/2020

Manufacturer's address:

No.4,Tongfu Road,Tong'an Industrial Center,Tong'an District,Xiamen,Fujian,China

www.actec.com