



Catalogue **LED TECHNOLOGY**
 Line **Led modules**
 FAmily **Constant Current Led Modules**
 Subfamily **Constant current linear modules**


Picture	Article	Description	Lot	Price/Unit
	LTLM140927		1	1,81 €
	Linear LED LM140/20E16 927H		72	1,64 €
			144	1,52 €
		Length (mm): 140 Width (mm): 20 Intensidad In (A): 0.5 Power (W): 5.4 Room Temperature (°C): -40~+55 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen/Watt: 131 Angle (°): 120 Energy efficiency: D CRI (≥): 90 Reference: 128227-927H		




	LTLM140930		1	1,81 €
	Linear LED LM140/20E16 930H		72	1,64 €
			144	1,52 €
		Length (mm): 140 Width (mm): 20 Intensidad In (A): 0.5 Power (W): 5.4 Room Temperature (°C): -40~+55 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen/Watt: 135 Angle (°): 120 Energy efficiency: D CRI (≥): 90 Reference: 128227-930H		



Subfamily **Constant current linear modules**

Picture	Article	Description	Lot	Price/Unit
	LTLM140940		1	1,81 €
	Linear LED LM140/20E16 940H		72	1,64 €
			144	1,52 €
	Length (mm): 140 Width (mm): 20 Intensidad In (A): 0.5 Power (W): 5.4 Room Temperature (°C): -40~+55 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen/Watt: 142 Angle (°): 120 Energy efficiency: D CRI (?): 90 Reference: 128227-940H			




	LTLM280927		1	2,77 €
	Linear LED LM280/20E32 927H		36	2,52 €
			72	2,34 €
	Length (mm): 279,4 Width (mm): 20 Intensidad In (A): 0.5 Power (W): 11 Room Temperature (°C): -40~+55 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen/Watt: 131 Angle (°): 120 Energy efficiency: D CRI (?): 90 Reference: 128083-927H			




LED TECHNOLOGY > Led modules > Constant Current Led Modules

Subfamily **Constant current linear modules**

Picture	Article	Description	Lot	Price/Unit
	LTLM280930		1	2,77 €
	Linear LED LM280/20E32 930H		36	2,52 €
			72	2,34 €
		Length (mm): 279,4 Width (mm): 20 Intensidad In (A): 0.5 Power (W): 11 Room Temperature (°C): -40~+55 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen/Watt: 135 Angle (°): 120 Energy efficiency: D CRI (?): 90 Reference: 128083-930H		



	LTLM280940		1	2,77 €
	Linear LED LM280/20E32 940H		36	2,52 €
			72	2,34 €
		Length (mm): 279,4 Width (mm): 20 Intensidad In (A): 0.5 Power (W): 11 Room Temperature (°C): -40~+55 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen/Watt: 142 Angle (°): 120 Energy efficiency: D CRI (?): 90 Reference: 128083-940H		



LED TECHNOLOGY > Led modules > Constant Current Led Modules

Subfamily **Constant current linear modules**

Picture	Article	Description	Lot	Price/Unit
	LTLM560927		1	4,43 €
	Linear LED LM560/20E64 927H		36	4,03 €
			72	3,73 €
		Length (mm): 559,6 Width (mm): 20 Intensidad In (A): 0.5 Power (W): 22 Room Temperature (°C): -40~+55 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen/Watt: 131 Angle (°): 120 Energy efficiency: D CRI (?): 90		
	Reference: 128082-927H			




	LTLM560930		1	4,43 €
	Linear LED LM560/20E64 930H		36	4,03 €
			72	3,73 €
		Length (mm): 559,6 Width (mm): 20 Intensidad In (A): 0.5 Power (W): 22 Room Temperature (°C): -40~+55 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen/Watt: 135 Angle (°): 120 Energy efficiency: D CRI (?): 90		
	Reference: 128082-930H			













LED TECHNOLOGY > Led modules > Constant Current Led Modules

Subfamily **Constant current linear modules**

Picture	Article	Description	Lot	Price/Unit
	LTLM560940		1	4,43 €
	Linear LED LM560/20E64 940H		36	4,03 €
			72	3,73 €
		Length (mm): 559,6 Width (mm): 20 Intensidad In (A): 0.5 Power (W): 22 Room Temperature (°C): -40~+55 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen/Watt: 142 Angle (°): 120 Energy efficiency: D CRI (?): 90 Reference: 128082-940H		











Catalogue **LED TECHNOLOGY**
 Line **Led modules**
 Family **Constant Current Led Modules**
 Subfamily **Contant Current Led Modules**

Picture	Article	Description	Lot	Price/Unit
	LC0B00013M		1	8,45 €
	Led spotlight CRI80 3000K 30° 100 Lm 1W. M16 Nut and 50cm AWG20 cable		50	7,02 €
			100	6,70 €
	Anodized aluminum body + M16x1.5 nut		500	6,37 €
	High (mm): 18,3 Diameter (mm): 17 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1 Lumen: 100 Candelas: 290 Angle (°): 30 Energy efficiency: F CRI (≥): 80 Life (Hours): 30000 Ingress Protection: IP20 Dimmable: SI			
	    			
	LC0A01062M		1	16,76 €
	Led module KC01 350mA 1,25W 2700K lens 45° 15cm red-black cable		10	15,24 €
			20	13,85 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.		100	13,20 €
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 2700 Lumen: 119 Angle (°): 45 Energy efficiency: A++ CRI (≥): 80 Ingress Protection: IP20			
	  			

LED TECHNOLOGY > Led modules > Constant Current Led Modules





Subfamily **Contant Current Led Modules**





Picture	Article	Description	Lot	Price/Unit
	LC0A01062N		1	16,76 €
	Led module KC01 350mA 1,25W 2700K lens 25°		10	15,24 €
	15cm red-black cable		20	13,85 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.		100	13,20 €
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 2700 Lumen: 119 Angle (°): 25 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
		  		

	LC0A01062W		1	16,76 €
	Led module KC01 350mA 1,25W 2700K lens 60°		10	15,24 €
	15cm red-black cable		20	13,85 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.		100	13,20 €
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 2700 Lumen: 119 Angle (°): 60 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
		  		

LED TECHNOLOGY > Led modules > Constant Current Led Modules





Subfamily **Contant Current Led Modules**





Picture	Article	Description	Lot	Price/Unit
	LC0A01063M		1	16,76 €
	Led module KC01 350mA 1,25W 3000K lens 45°		10	15,24 €
	15cm red-black cable		20	13,85 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.		100	13,20 €
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 3000 Lumen: 123 Angle (°): 45 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
		  		

	LC0A01063N		1	16,76 €
	Led module KC01 350mA 1,25W 3000K lens 25°		10	15,24 €
	15cm red-black cable		20	13,85 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.		100	13,20 €
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 3000 Lumen: 123 Angle (°): 25 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
		  		





LED TECHNOLOGY > Led modules > Constant Current Led Modules





Subfamily **Contant Current Led Modules**

Picture	Article	Description	Lot	Price/Unit
	LC0A01063W		1	16,76 €
	Led module KC01 350mA 1,25W 3000K lens 60°		10	15,24 €
	15cm red-black cable		20	13,85 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.		100	13,20 €
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 3000 Lumen: 123 Angle (°): 60 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
		  		

	LC0A01064M		1	16,76 €
	Led module KC01 350mA 1,25W 4000K lens 45°		10	15,24 €
	15cm red-black cable		20	13,85 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.		100	13,20 €
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 4000 Lumen: 130 Angle (°): 45 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
		  		




Subfamily **Contant Current Led Modules**




Picture	Article	Description	Lot	Price/Unit
	LC0A01064N		1	16,76 €
	Led module KC01 350mA 1,25W 4000K lens 25°		10	15,24 €
	15cm red-black cable		20	13,85 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.		100	13,20 €
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 4000 Lumen: 130 Angle (°): 25 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
		  		

	LC0A01064W		1	16,76 €
	Led module KC01 350mA 1,25W 4000K lens 60°		10	15,24 €
	15cm red-black cable		20	13,85 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.		100	13,20 €
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 4000 Lumen: 130 Angle (°): 60 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
		  		

LED TECHNOLOGY > Led modules > Constant Current Led Modules









Subfamily **Contant Current Led Modules**

Picture	Article	Description	Lot	Price/Unit
	LC0A01065M		1	16,76 €
	Led module KC01 350mA 1,25W 5000K lens 45°		10	15,24 €
	15cm red-black cable		20	13,85 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.		100	13,20 €
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 5000 Lumen: 150 Angle (°): 45 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
		CE	 	

	LC0A01065N		1	16,76 €
	Led module KC01 350mA 1,25W 5000K lens 25°		10	15,24 €
	15cm red-black cable		20	13,85 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.		100	13,20 €
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.5 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 5000 Lumen: 150 Angle (°): 25 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
		CE	 	







LED TECHNOLOGY > Led modules > Constant Current Led Modules

Subfamily **Contant Current Led Modules**

Picture	Article	Description	Lot	Price/Unit
	LC0A01065W		1	16,76 €
	Led module KC01 350mA 1,25W 5000K lens 60°		10	15,24 €
	15cm red-black cable		20	13,85 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.		100	13,20 €
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 5000 Lumen: 150 Angle (°): 60 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
		  		
	LC0C01032M		1	19,05 €
	Led module KC02 350mA 1,25W 2700K 45° lens		10	17,32 €
	15cm red-black cable		20	15,74 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 30mm diameter hole with its thread.		100	14,99 €
	High (mm): 26,3 Diameter (mm): 33,5 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 2700 Lumen: 119 Angle (°): 45 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
		  		



LED TECHNOLOGY > Led modules > Constant Current Led Modules

Subfamily **Contant Current Led Modules**

Picture	Article	Description	Lot	Price/Unit
	LC0C01032N		1	19,05 €
	Led module KC02 350mA 1W 2700K 30° lens 15cm red-black cable		10	17,32 €
			20	15,74 €
			100	14,99 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 30mm diameter hole with its thread.			
	High (mm): 26,3 Diameter (mm): 33,5 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 2700 Lumen: 119 Angle (°): 30 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
	CE	 		
	LC0C01033M		1	19,05 €
	Led module KC02 350mA 1W 3000K lens 45° 15cm red-black cable		10	17,32 €
			20	15,74 €
			100	14,99 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 30mm diameter hole with its thread.			
	High (mm): 26,3 Diameter (mm): 33,5 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 3000 Lumen: 123 Angle (°): 45 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
	CE	 		



LED TECHNOLOGY > Led modules > Constant Current Led Modules

Subfamily **Contant Current Led Modules**

Picture	Article	Description	Lot	Price/Unit
	LC0C01033N		1	19,05 €
	Led module KC02 350mA 1W 3000K lens 30° 15cm red-black cable		10	17,32 €
			20	15,74 €
			100	14,99 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 30mm diameter hole with its thread.			
	High (mm): 26,3 Diameter (mm): 33,5 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 3000 Lumen: 130 Angle (°): 30 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
	CE		RoHS	WV
	LC0C01034M		1	19,05 €
	Led module KC02 350mA 1W 4000K lens 45° 15cm red-black cable		10	17,32 €
			20	15,74 €
			100	14,99 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 30mm diameter hole with its thread.			
	High (mm): 26,3 Diameter (mm): 33,5 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 4000 Lumen: 130 Angle (°): 45 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
	CE		RoHS	WV


LED TECHNOLOGY > Led modules > Constant Current Led Modules

Subfamily **Contant Current Led Modules**



Picture	Article	Description	Lot	Price/Unit
	LC0C01034N		1	19,05 €
	Led module KC02 350mA 1W 4000K 30° lens 15cm red-black cable		10	17,32 €
			20	15,74 €
			100	14,99 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 30mm diameter hole with its thread.			
	High (mm): 26,3 Diameter (mm): 33,5 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 4000 Lumen: 130 Angle (°): 30 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
	CE		EW	
	LC0C01035M		1	19,05 €
	Led module KC02 350mA 1W 5000K lens 45° 15cm red-black cable		10	17,32 €
			20	15,74 €
			100	14,99 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 30mm diameter hole with its thread.			
	High (mm): 26,3 Diameter (mm): 33,5 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 5000 Lumen: 150 Angle (°): 45 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
	CE		EW	

LED TECHNOLOGY > Led modules > Constant Current Led Modules

Subfamily **Contant Current Led Modules**

Picture	Article	Description	Lot	Price/Unit
	LC0C01035N		1	19,05 €
		Led module KC02 350mA 1W 5000K 30° lens 15cm red-black cable	10	17,32 €
			20	15,74 €
		Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 30mm diameter hole with its thread.	100	14,99 €
		High (mm): 26,3 Diameter (mm): 33,5 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 5000 Lumen: 150 Angle (°): 30 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20		



 	G5A71130		1	4,82 €
		Led COB 11W square base AL 700mA 3000K	5	4,03 €
			10	3,51 €
		With 15 cm parallel brown (+) blue (-) cable. Ideal for substitution of 50W halogen dichroic	100	3,04 €
		Length (mm): 70 Diameter (mm): 50 Colour: Warm White Voltage In (Vdc): 15.6 Intensidad In (A): 0.7 Frecuency (Hz): 50~60 Power (W): 11 Colour Temperature (°K): 3000 Lumen: 858 Angle (°): 40 Energy efficiency: A+ Kwh/1000h: 11 CRI (?): 80 Life (Hours): 39000 Ingress Protection: IP20		







Catalogue **LED TECHNOLOGY**

Line **Led modules**

FAMILY **Battery Led Modules**









Subfamily **LED modules to battery**

Download led module with battery catalogue [here.](#)

Picture	Article	Description	Lot	Price/Unit
	G5K0040M-7		1	36,93 €
	Module led battery 290 Lm 3000K IP65 direct charge Micro-B USB.		10	33,58 €
			48	30,54 €
	Direct charging via micro-B USB socket. 5V-2A charger and USB cable not included, order separately.		96	29,07 €
		High (mm): 62 Diameter (mm): 120 Colour: White Voltage In (Vdc): 5 Power (W): 3 Colour Temperature (°K): 3000 Lumen: 290 CRI (≥): 80 Ingress Protection: IP65 Dimmable: SI		
				
	G5K0040M-3C		1	41,35 €
	Module LED battery IP67 290 lm 3000K Charging induction. USB -C		10	37,61 €
			48	34,18 €
	Charging via induction base with USB type C. Recommended charger code G5K0021F with 1 m USB type A cable - USB type C not included. Order separately.		96	32,57 €
		High (mm): 62 Diameter (mm): 120 Colour: White Voltage In (Vdc): 5 Power (W): 3 Colour Temperature (°K): 3000 Lumen: 290 CRI (≥): 80 Ingress Protection: IP67 Dimmable: SI		
				








LED TECHNOLOGY > Led modules > Battery Led Modules

Subfamily **LED modules to battery**

Picture	Article	Description	Lot	Price/Unit
	G5K0021F		1	7,22 €
	EUR 5V-2A charger with rear USB socket with 1m cable		10	6,55 €
			50	5,95 €
			100	5,67 €
	Colour: White Voltage In (Vac): 100~240 Voltage Out (Vdc): 5 Intensidad In (A): 0.5 Intensidad Out (A): 2 Frecuency (Hz): 50~60			
	 			
	G5K0021FC		1	7,70 €
	EUR 5V-2A charger with rear USB socket with 1m USB-USB-C cable		10	6,99 €
			50	6,36 €
			100	6,06 €
	Colour: White Voltage In (Vac): 100~240 Voltage Out (Vdc): 5 Intensidad In (A): 0.5 Intensidad Out (A): 2 Frecuency (Hz): 50~60			
	 			
	G5K0021U		1	0,98 €
	USB cable - Mini USB 1 meter white		10	0,88 €
			50	0,81 €
	Cable 2464 24AWG VW. For low voltage chargers with USB socket		100	0,77 €
	Length (mm): 1000 Colour: White			
				







LED TECHNOLOGY > Led modules > Battery Led Modules

Subfamily **LED modules to battery**

Picture	Article	Description	Lot	Price/Unit
	G5K0021UC		1	1,42 €
	1 meter white USB-USB TypeC cable		10	1,29 €
	2464 24AWG VW Cable. For low voltage chargers with USB socket		50	1,17 €
			100	1,12 €
	Length (mm): 1000 Colour: White			
				
	G5K0021UCC		1	1,42 €
	1 meter white USB type C cable - USB type C		10	1,29 €
	2464 24AWG VW Cable. For low voltage chargers with USB-C socket		50	1,17 €
			100	1,12 €
	Length (mm): 1000 Colour: White			
				
	G5K0022C		1	4,32 €
	USA charger 5V-1A for TOUCH module		10	3,91 €
	Para cable USB- Mini USB 		50	3,56 €
			100	3,39 €
	Colour: White Voltage In (Vac): 100~240 Voltage Out (Vdc): 5 Intensidad In (A): 0.4 Intensidad Out (A): 1 Frecuency (Hz): 50~60			
			 	

LED TECHNOLOGY > Led modules > Battery Led Modules

Subfamily **LED modules to battery**

Picture	Article	Description	Lot	Price/Unit
	G5K0040C		1	5,25 €
	EUR Charger 12V-1A with 1m USB-mini USB Cable		10	4,77 €
	USB / MiCRO USB socket with 1 m cable		50	4,34 €
			100	4,13 €
	Colour: White Voltage In (Vac): 100~240 Voltage Out (Vdc): 12 Frecuency (Hz): 50~60 Power (W): 12 Ingress Protection: IP20			
 				
	G5K0041C		1	5,25 €
	USA Charger 12V-1A with USB socket wihtout cable		10	4,77 €
			50	4,34 €
			100	4,13 €
	Colour: White Voltage In (Vac): 100~240 Voltage Out (Vdc): 12 Intensidad Out (A): 1			
 				







Catalogue **LED TECHNOLOGY**

Line **Led modules**

FAMILY **Battery Led Modules**

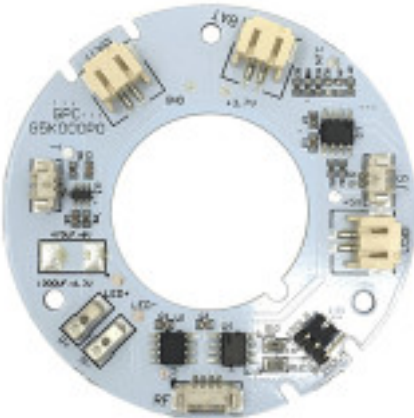










Subfamily **Configurable Led battery modules**

Download the technical data sheet of the module and its components [here](#).

Picture	Article	Description	Lot	Price/Unit
	G5K000P0	Crown control board module led to battery GPC	1	11,84 €
			10	10,78 €
		Jumper that allows you to choose 150lm or 250lm.	40	9,78 €
		Connectors with 1 or 2 batteries, touch and micro USB.	80	9,32 €
	Diameter (mm): 65 Ingress Protection: IP20 Dimmable: SI			
	 			
	G5K000P02	Mini control board D40 module led to battery GPC02	1	11,84 €
			10	10,78 €
		Jumper that allows you to choose 150lm or 250lm.	50	9,79 €
		Connectors with 1 or 2 batteries, touch and micro USB.	150	9,32 €
	High (mm): 10 Diameter (mm): 40 Ingress Protection: IP20 Dimmable: SI			
	 			





LED TECHNOLOGY > Led modules > Battery Led Modules

Subfamily **Configurable Led battery modules**

Picture	Article	Description	Lot	Price/Unit
	G5K000P3		1	11,84 €
	Rectangular control board module led to battery GPC		10	10,78 €
	Jumper that allows you to choose 150lm or 250lm. Connectors to 1 or 2 batteries, touch and micro USB. Note: The compatible battery is G5K000P1 and must be connected after touch control.		50	9,79 €
			200	9,32 €
		Length (mm): 37 Width (mm): 25,1 High (mm): 10,3 Ingress Protection: IP20 Dimmable: SI		
		   		
	G5K000P1		1	8,42 €
	Battery 805050 with 10cm AWG22 cable and connector		10	7,67 €
			50	6,98 €
			100	6,64 €
		With AWG22 cable and connector. Battery compatible with the G5K000P0 and G5K000P02 modules. The battery must be connected after connecting the touch control. "		
		Length (mm): 50 Width (mm): 50 High (mm): 8 Voltage In (Vdc): 3.7 Ingress Protection: IP20		
		    		



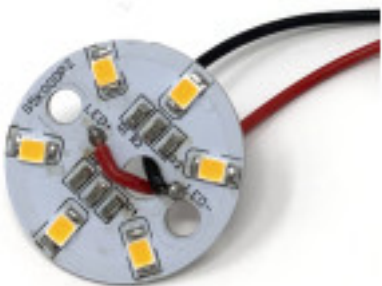

LED TECHNOLOGY > Led modules > Battery Led Modules

Subfamily **Configurable Led battery modules**

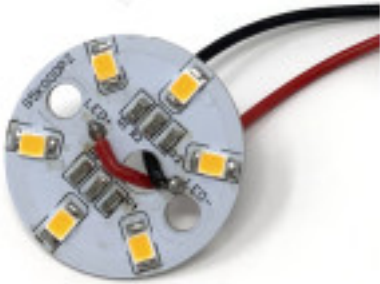Picture	Article	Description	Lot	Price/Unit
	G5K000P1C		1	6,45 €
	Cylindrical battery Li-Ion 18650 2600mAh 10cm		10	5,86 €
	AWG22 cable and connecto		50	5,33 €
	With AWG22 cable and connector		100	5,07 €
	Length (mm): 65 Diameter (mm): 18 Voltage In (Vdc): 3.7 Ingress Protection: IP20			
				
	G5K000P2		1	3,50 €
	Module GPC D28mm. 6 led SAMSUNG 3000K CRI90		10	3,16 €
	50cm AWG22		50	2,87 €
	Aluminum plate 28mm diameter. According to selection on the control board 150lm or 250lm.		100	2,76 €
	Diameter (mm): 28 Voltage In (Vdc): 3.7 Colour Temperature (°K): 3000 Lumen/Watt: 120 Energy efficiency: G CRI (?): 90 Ingress Protection: IP20 Dimmable: SI			
				






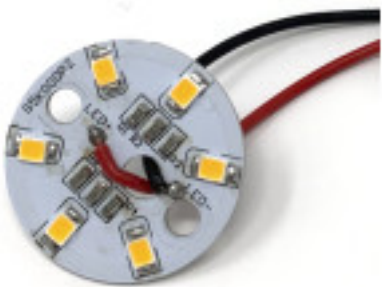



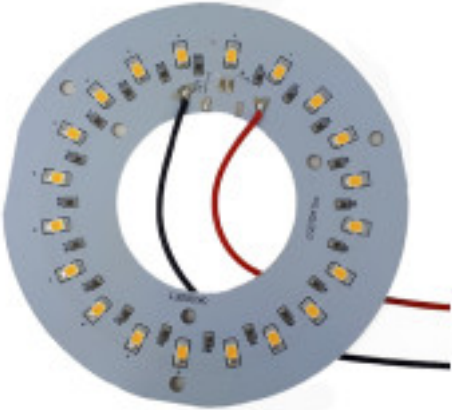

LED TECHNOLOGY > Led modules > Battery Led Modules

Subfamily **Configurable Led battery modules**










Picture	Article	Description	Lot	Price/Unit
	G5K000P2A		1	3,51 €
	Module GPC D28mm. 6 led SAMSUNG 3000K CRI90		10	3,17 €
	25cm AWG22		50	2,89 €
	Aluminum plate 28mm diameter. According to selection on the control board 150lm or 250lm.		200	2,76 €
	Diameter (mm): 28 Voltage In (Vdc): 3.7 Colour Temperature (°K): 3000 Lumen/Watt: 120 Energy efficiency: G CRI (?): 90 Ingress Protection: IP20 Dimmable: SI			
				
	G5K000P2C		1	3,50 €
	Module GPC D28mm. 6 led SAMSUNG 2700K CRI90		10	3,17 €
	50cm AWG22		50	2,89 €
	Aluminum plate 28mm diameter. According to selection on the control board 150lm or 250lm.		100	2,76 €
	Diameter (mm): 28 Voltage In (Vdc): 3.7 Colour Temperature (°K): 2700 Lumen/Watt: 120 Energy efficiency: G CRI (?): 90 Ingress Protection: IP20 Dimmable: SI			
				

LED TECHNOLOGY > Led modules > Battery Led Modules

Subfamily **Configurable Led battery modules**













Picture	Article	Description	Lot	Price/Unit
	G5K000P3		1	10,63 €
	Module Crown GPC D100mm. 20 led Samsung 3000K CRI90 50cm AWG22		10	9,67 €
			50	8,40 €
			100	8,01 €
	Aluminum plate 100mm diameter. According to selection on the control board 170lm or 350 Lm Diameter (mm): 100 Voltage In (Vdc): 3.7 Colour Temperature (°K): 3000 Lumen/Watt: 120 CRI (?): 90 Ingress Protection: IP20 Dimmable: SI			
	  			
	G5K000P4		1	3,93 €
	Module linear GPC 200x8mm 7 led Samsung 3000K CRI90 50cm AW22		10	3,56 €
			50	3,11 €
			100	2,95 €
	With double-sided adhesive for fixing. According to selection on the control board 150Lm or 250Lm Voltage In (Vdc): 3.7 Colour Temperature (°K): 3000 Lumen/Watt: 120 CRI (?): 90 Ingress Protection: IP20 Dimmable: SI			
	  			
	G5K000P5		1	0,71 €
	Micro-B USB 10cm cable AWG22 and connector		10	0,65 €
	Micro-B USB mounted on white round support 12mm in diameter and 7mm high with 10cm AWG22 cable and connector.		50	0,5875 €
			100	0,5594 €
	High (mm): 7 Diameter (mm): 12			
	 			

Subfamily **Configurable Led battery modules**

Picture	Article	Description	Lot	Price/Unit
	G5K000P5C		1	0,96 €
	USB-C with 10cm cable AWG22 and connector		10	0,87 €
	USB-C mounted on white round support 12mm in diameter and 7mm high with 10cm AWG22 cable and connector.		50	0,79 €
			100	0,75 €
		High (mm): 8,89 Diameter (mm): 12,39		
		 		
	G5K000P5CN		1	0,96 €
	GPC USB-C Black with 10cm AWG22 cable and 2.0 pin connector.		10	0,87 €
	USB-C mounted on black round support 12mm in diameter and 7mm high with 10cm AWG22 cable and connector.		50	0,79 €
			100	0,75 €
		High (mm): 8,89 Diameter (mm): 12,39		
		 		
	G5K000P6		1	1,73 €
	Micro-B USB with led charging and 10cm cable and connectors		10	1,57 €
	Micro-B USB mounted on board with LED charging indicator. AWG22 cable and connector.		50	1,42 €
			100	1,37 €
		Length (mm): 22 Width (mm): 11 High (mm): 7		
		 		

LED TECHNOLOGY > Led modules > Battery Led Modules




Subfamily **Configurable Led battery modules**

Picture	Article	Description	Lot	Price/Unit
	G5K000P8		1	3,47 €
	GPC module RF control board and antenna		10	3,17 €
	Optional board for remote control		50	2,87 €
			100	2,73 €
	Length (mm): 23 Width (mm): 16 High (mm): 4			
	  			
	G5K000P9		1	3,03 €
	RF remote control for GPC module		10	2,74 €
	With functions of on, off and continuous regulation or with buttons 10%, 50% and 100%. Time control for 15min, 30min or 60min. Includes CR2025 3V battery.		50	2,51 €
			100	2,38 €
	Length (mm): 86 Width (mm): 40 High (mm): 7			
	  			
	G5K000X6		1	0,68 €
	Touch with cylinder 10cm cable and micro connector		10	0,61 €
	With cylinder and 10cm of cable and micro-connector. ON / OFF and Dimmer function. No memory. The touch control must be connected before the battery.		50	0,56 €
			100	0,53 €
	High (mm): 9 Diameter (mm): 4			
	  			

Subfamily **Configurable Led battery modules**

Picture	Article	Description	Lot	Price/Unit
	G5K000X7		1	0,5161 €
		Touch with ring 10cm cable and micro connector	10	0,4692 €
		With ring and 10cm of cable and micro-connector. ON / OFF and Dimmer function. Without memory . The touch control has to be connected before the battery.	50	0,4267 €
		Diameter (mm): 6	100	0,4061 €
				
	G5K000X7L		1	0,4904 €
		Touch with ring 16cm cable and micro connector	50	0,4220 €
		With ring and 16cm of cable and micro-connector. ON / OFF and Dimmer function. Without memory . The touch control has to be connected before the battery.	100	0,4056 €
		Diameter (mm): 6		
				
	G5K0021F		1	7,22 €
		EUR 5V-2A charger with rear USB socket with 1m cable	10	6,55 €
		Colour: White Voltage In (Vac): 100~240 Voltage Out (Vdc): 5 Intensidad In (A): 0.5 Intensidad Out (A): 2 Frecuency (Hz): 50~60	50	5,95 €
			100	5,67 €
				

Subfamily **Configurable Led battery modules**

Picture	Article	Description	Lot	Price/Unit
	G5K0021FC		1	7,70 €
	EUR 5V-2A charger with rear USB socket with 1m		10	6,99 €
	USB-USB-C cable		50	6,36 €
		Colour: White Voltage In (Vac): 100~240 Voltage Out (Vdc): 5 Intensidad In (A): 0.5 Intensidad Out (A): 2 Frecuency (Hz): 50~60		100
				
	G5K0021U		1	0,98 €
	USB cable - Mini USB 1 meter white		10	0,88 €
	Cable 2464 24AWG VW. For low voltage chargers		50	0,81 €
	with USB socket		100	0,77 €
	Length (mm): 1000 Colour: White			
				
	G5K0021UC		1	1,42 €
	1 meter white USB-USB TypeC cable		10	1,29 €
	2464 24AWG VW Cable. For low voltage chargers		50	1,17 €
	with USB socket		100	1,12 €
	Length (mm): 1000 Colour: White			
				

Catalogue **LED TECHNOLOGY**


Line **Led modules**

FAMILY **Led Lumens Modules**

Subfamily **EggDrop F3-series Flicker Free**

COB Modules mains voltage. ECO desing according to ERP directives. Diameter 38mm. Powers 4, 6, 8W.















Automatic connectors. Dimmable with leading and trailing edge dimmers.

Picture	Article	Description	Lot	Price/Unit
	LUE38049272F3		1	15,11 €
	Led Cob EDC/38C/4W/927/230V/F302		10	12,58 €
			80	11,44 €
	ECO design according to ERP directives. Automatic connectors. Dimmable by cutting start or end of phase.		160	10,89 €
	High (mm): 7,15 Diameter (mm): 38 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 4 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 365 Angle (°): 120 Energy efficiency: F CRI (≥): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95			




LED TECHNOLOGY > Led modules > Led Lumens Modules


Subfamily **EggDrop F3-series Flicker Free**

Picture	Article	Description	Lot	Price/Unit
	LUE38049302F3	Led Cob EDC/38C/4W/930/230V/F302	1	15,11 €
			10	12,58 €
			80	11,44 €
		ECO design according to ERP directives. Automatic connectors. Dimmable by cutting start or end of phase.	160	10,89 €
		High (mm): 7,15 Diameter (mm): 38 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 4 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 370 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95		
     				
	LUE38049402F3	Led Cob EDC/38C/4W/940/230V/F302	1	15,11 €
			10	12,58 €
			80	11,44 €
		ECO design according to ERP directives. Automatic connectors. Dimmable by cutting start or end of phase.	160	10,89 €
		High (mm): 7,15 Diameter (mm): 38 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 4 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen: 395 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95		
     				

Subfamily **EggDrop F3-series Flicker Free**















Picture	Article	Description	Lot	Price/Unit
	LUE38069272F3		1	15,28 €
	Led Cob EDC/38C/6W/927/230V/F302		10	12,73 €
			100	11,57 €
	ECO design according to ERP directives. Automatic connectors. Dimmable by cutting start or end of phase.		200	11,02 €
	High (mm): 7,15 Diameter (mm): 38 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 6 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 560 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95			

















	LUE38069302F3		1	15,28 €
	Led Cob EDC/38C/6W/930/230V/F302		10	12,73 €
			80	11,57 €
	ECO design according to ERP directives. Automatic connectors. Dimmable by cutting start or end of phase.		160	11,02 €
	High (mm): 7,15 Diameter (mm): 38 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 6 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 570 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95			



Subfamily **EggDrop F3-series Flicker Free**


Picture	Article	Description	Lot	Price/Unit
	LUE38069402F3	Led Cob EDC/38C/6W/940/230V/F302	1	15,28 €
			10	12,73 €
			80	11,57 €
		ECO design according to ERP directives. Automatic connectors. Dimmable by cutting start or end of phase.	160	11,02 €
		High (mm): 7,15 Diameter (mm): 38 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 6 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen: 595 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95		
     				
	LUE38089272F3	Led Cob EDC/38C/8W/927/230V/F302	1	15,42 €
			10	12,84 €
			80	11,67 €
		ECO design according to ERP directives. Automatic connectors. Dimmable by cutting start or end of phase.	160	11,12 €
		High (mm): 7,15 Diameter (mm): 38 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 8 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 745 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95		
     				

Subfamily **EggDrop F3-series Flicker Free**


Picture	Article	Description	Lot	Price/Unit
	LUE38089302F3	Led Cob EDC/38C/8W/930/230V/F302	1	15,42 €
			10	12,84 €
			80	11,67 €
		ECO design according to ERP directives. Automatic connectors. Dimmable by cutting start or end of phase.	160	11,12 €
		High (mm): 7,15 Diameter (mm): 38 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 8 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 760 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95		
     				
	LUE38089402F3	Led Cob EDC/38C/8W/940/230V/F302	1	15,42 €
			10	12,84 €
			80	11,67 €
		ECO design according to ERP directives. Automatic connectors. Dimmable by cutting start or end of phase.	160	11,12 €
		High (mm): 7,15 Diameter (mm): 38 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 8 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen: 790 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95		
     				

LED TECHNOLOGY > Led modules > Led Lumens Modules

Subfamily **EggDrop F3-series Flicker Free**

Picture	Article	Description	Lot	Price/Unit
	LUEHL38F3		1	1,07 €
	Holder for EDC/38C F302		5	0,88 €
			50	0,81 €
	High (mm): 8,3 Diameter (mm): 40,7		100	0,77 €



	LUETT38F3		1	0,69 €
	Thermal Tape for EDC/38C F302		50	0,57 €
	Distributes the heat on the surface of the module. It must measure 6mm more in diameter than the module		100	0,52 €
	Diameter (mm): 44 Colour: Black		200	0,49 €



Catalogue **LED TECHNOLOGY**

Line **Led modules**


FAMILY **Led Lumens Modules**

Subfamily **EggDrop G-series**

COB modules mains voltage 120V (UL) and 230V (EC) potencias 4 to 40W. CRI 80 and 90. T Color from 2700K to 600K. With automatic connectors .compatible with most existing TRIAC dimmer in the market .Optionally with LED Holder (Zhaga compliant) and Thermal pad connectors to distribute heat over the entire surface..


see manual application [aquí.](#)

see manual product [aquí.](#)


Picture	Article	Description	Lot	Price/Unit
	LUE47108302A		1	10,66 €
	Led Cob EDC/47C/10W/830/230V/A101		9	8,91 €
	Automatic connectors Dimmable with most Triac dimmers. SDCM 3. Assembly holes Zhaga standars.		180	8,45 €
		High (mm): 4,8 Diameter (mm): 47 Voltage In (Vac): 230 Intensidad In (A): 0.043 Frecuency (Hz): 50~60 Power (W): 10 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 1150 Angle (°): 120 Energy efficiency: A+ CRI (≥): 80 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,99		



Subfamily **EggDrop G-series**


Picture	Article	Description	Lot	Price/Unit
	LUE47108402A		1	10,66 €
	Led Cob EDC/47C/10W/840/230V/A101		9	8,91 €
	Automatic connectors Dimmable with most Triac dimmers. SDCM 3. Assembly holes Zhaga standards.		180	8,45 €
	High (mm): 4,8 Diameter (mm): 47 Voltage In (Vac): 230 Intensidad In (A): 0.043 Frecuency (Hz): 50~60 Power (W): 10 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen: 1219 Angle (°): 120 Energy efficiency: A+ CRI (?): 80 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.99			




	LUE47129272		1	13,10 €
	Led Cob EDC/47C/12W/927/230V/A		9	10,92 €
	Automatic connectors Dimmable with most Triac dimmers. SDCM 3. Assembly holes Zhaga standards.		90	9,10 €
	High (mm): 4,8 Diameter (mm): 47 Voltage In (Vac): 230 Intensidad In (A): 0.052 Frecuency (Hz): 50~60 Power (W): 12 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 1020 Angle (°): 120 Energy efficiency: A+ CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.99		180	8,71 €



Subfamily **EggDrop G-series**


Picture	Article	Description	Lot	Price/Unit
	LUE47129302		1	13,10 €
	Led Cob EDC/47C/12W/930/230V/A		9	10,92 €
	Automatic connectors Dimmable with most Triac dimmers. SDCM 3. Assembly holes Zhaga standars.		90	9,10 €
			180	8,71 €
	High (mm): 4,8 Diameter (mm): 47 Voltage In (Vac): 230 Intensidad In (A): 0.052 Frecuency (Hz): 50~60 Power (W): 12 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 1080 Angle (°): 120 Energy efficiency: A+ CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.99			




	LUE47158302		1	14,20 €
	Led Cob EDC/47C/15W/830/230V/A		9	11,83 €
	Automatic connectors. Dimmable with most Triac dimmers. SDCM 3. Mounting holes Zhaga standars.		90	9,88 €
			180	9,36 €
	High (mm): 4,8 Diameter (mm): 47 Voltage In (Vac): 230 Intensidad In (A): 0.065 Frecuency (Hz): 50~60 Power (W): 15 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 1500 Angle (°): 120 Energy efficiency: A+ CRI (?): 80 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.99			



Subfamily **EggDrop G-series**


Picture	Article	Description	Lot	Price/Unit
	LUE47158402A		1	12,31 €
	Led Cob EDC/47C/15W/840/230V/A101		9	10,35 €
	Automatic connectors Dimmable with most Triac dimmers. SDCM 3. Assembly holes Zhaga standars.		180	9,88 €
	High (mm): 4,8 Diameter (mm): 47 Voltage In (Vac): 230 Intensidad In (A): 0.065 Frecuency (Hz): 50~60 Power (W): 15 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen: 1545 Angle (°): 120 Energy efficiency: A+ CRI (?): 80 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.99			




	LUE47159272		1	12,75 €
	Led Cob EDC/47C/15W/927/230V/A		9	10,63 €
	Automatic connectors. Dimmable with most Triac dimmers. SDCM 3. Mounting holes Zhaga standars.		90	8,88 €
	High (mm): 4,8 Diameter (mm): 47 Voltage In (Vac): 230 Intensidad In (A): 0.065 Frecuency (Hz): 50~60 Power (W): 15 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 1275 Angle (°): 120 Energy efficiency: A+ CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.99		180	8,41 €




Subfamily **EggDrop G-series**

Picture	Article	Description	Lot	Price/Unit
	LUE47159302		1	12,75 €
	Led Cob EDC/47C/15W/930/230V/A		9	10,63 €
	Automatic connectors Dimmable with most Triac dimmers. SDCM 3. Assembly holes Zhaga standars.		90	8,88 €
			180	8,41 €
	High (mm): 4,8 Diameter (mm): 47 Voltage In (Vac): 230 Intensidad In (A): 0.065 Frecuency (Hz): 50~60 Power (W): 15 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 1500 Angle (°): 120 Energy efficiency: A+ CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,99			




	LUE57129272F		1	18,10 €
	Led Cob EDC/57C/12W/927/230V/A FF Flicker Free		5	15,08 €
	Automatic connectors. Dimmable with most Triac dimmers. SDCM 3. Mounting holes Zhaga standars.		50	12,61 €
			100	11,96 €
	High (mm): 9,9 Diameter (mm): 57 Voltage In (Vac): 230 Intensidad In (A): 0.052 Frecuency (Hz): 50~60 Power (W): 12 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 1241 Angle (°): 120 Energy efficiency: A+ CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.99			




LED TECHNOLOGY > Led modules > Led Lumens Modules

Subfamily **EggDrop G-series**

Picture	Article	Description	Lot	Price/Unit
	LUE57208302D		1	20,44 €
	Led Cob EDC/57C/20W/830DW/230V/A/FF Dimable to warm and FF		5	17,03 €
			50	14,17 €
			100	13,52 €
	Automatic connectors. Dimmable with most Triac dimmers. SDCM 3. Mounting holes Zhaga standards.			
	High (mm): 4,8 Diameter (mm): 57 Voltage In (Vac): 230 Intensidad In (A): 0.087 Frecuency (Hz): 50~60 Power (W): 20 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 1800~3000 Lumen: 2000 Angle (°): 120 Energy efficiency: A+ CRI (?): 80 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.99			




	LUEHL38		1	0,75 €
	Holder D41 for EDC/38C white		5	0,62 €
			50	0,52 €
			100	0,49 €
	UNTIL END OF STOCKS. Zhaga standard. 5.5mm diameter fixing holes 35mm apart between centers.			
	High (mm): 6,6 Diameter (mm): 41 Colour: White			




LED TECHNOLOGY > Led modules > Led Lumens Modules

Subfamily **EggDrop G-series**

Picture	Article	Description	Lot	Price/Unit
	LUEHL47		1	0,83 €
	Holder D50 for EDC/47C white		5	0,69 €
	UNTIL END OF STOCKS. Zhaga standard. 5.5mm diameter fixing holes 35mm apart between centers.		50	0,57 €
	High (mm): 6,6 Diameter (mm): 50 Colour: White		100	0,55 €




	LUEHL47T		1	0,83 €
	Holder D50 for EDC/47C transparent		5	0,69 €
	UNTIL STOCK LAST. Zhaga standard. 5.5mm diameter fastening holes spaced 35mm between centers.		50	0,57 €
	High (mm): 6,6 Diameter (mm): 50 Colour: Transparent		100	0,55 €




LED TECHNOLOGY > Led modules > Led Lumens Modules

Subfamily **EggDrop G-series**

Picture	Article	Description	Lot	Price/Unit
	LUEHL57		1	0,87 €
	Holder D60 for EDC/57C white		5	0,73 €
	Zhaga standard. 5.5mm diameter mounting holes separated by 35mm between centers.		50	0,61 €
	High (mm): 6,6 Diameter (mm): 60 Colour: White		100	0,59 €




	LUETT47		1	0,75 €
	Thermal Tape for EDC/47C		5	0,62 €
	UNTIL END OF STOCKS. Distributes the heat on the surface of the module. It should measure 6mm more in diameter than the module		50	0,52 €
	Diameter (mm): 53		100	0,49 €



LED TECHNOLOGY > Led modules > Led Lumens Modules

Subfamily **EggDrop G-series**

Picture	Article	Description	Lot	Price/Unit
	LUETT57		1	0,72 €
	Thermal Tape for EDC/57C		5	0,60 €
	UNTIL END OF STOCKS. Distributes the heat on the surface of the module. It should measure 6mm more in diameter than the module		50	0,55 €
	Diameter (mm): 63		100	0,52 €




Catalogue **LED TECHNOLOGY**

Line **Led modules**

FAMILY **Led Lumens Modules**

Subfamily **EggDrop F2-series Flicker Free**


COB Modules mains voltage. ECO desing according to ERP directives. Powers from 4 to 20W. Automatic connectors. Dimmable with leading and trailing edge dimmers.

Picture	Article	Description	Lot	Price/Unit
	LUE47049272F2		1	14,87 €
	Led Cob EDC/47C/4W/927/230V/F201		9	12,39 €
		ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers.	90	11,26 €
			180	10,73 €
		High (mm): 7,6 Diameter (mm): 47 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 4 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 316 Angle (°): 120 Energy efficiency: G CRI (≥): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95		




LED TECHNOLOGY > Led modules > Led Lumens Modules

Subfamily **EggDrop F2-series Flicker Free**


Picture	Article	Description	Lot	Price/Unit
	LUE47049302F2		1	14,87 €
	Led Cob EDC / 47C / 4W / 930 / 230V / F201		9	12,39 €
			90	11,26 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers.		180	10,73 €
	High (mm): 7,6 Diameter (mm): 47 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 4 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen: 344 Angle (°): 120 Energy efficiency: G CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			



Subfamily **EggDrop F2-series Flicker Free**


Picture	Article	Description	Lot	Price/Unit
	LUE47069272F2		1	14,98 €
	Led Cob EDC / 47C / 6W / 927 / 230V / F201		9	12,48 €
			90	11,35 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers.		180	10,80 €
	High (mm): 7,6 Diameter (mm): 47 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 6 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 475 Angle (°): 120 Energy efficiency: G CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			




	LUE47069302F2		1	14,98 €
	Led Cob EDC / 47C / 6W / 930 / 230V / F201		9	12,48 €
			90	11,35 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers.		180	10,80 €
	High (mm): 7,6 Diameter (mm): 47 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 6 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 516 Angle (°): 120 Energy efficiency: G CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			



Subfamily **EggDrop F2-series Flicker Free**


Picture	Article	Description	Lot	Price/Unit
	LUE47069402F2		1	14,98 €
	Led Cob EDC / 47C / 6W / 940 / 230V / F201		9	12,48 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		90	11,35 €
			180	10,80 €
	High (mm): 7,6 Diameter (mm): 47 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 6 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen: 537 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			




	LUE47089272F2		1	15,07 €
	Led Cob EDC / 47C / 8W / 927 / 230V / F201		9	12,56 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		90	11,41 €
			180	10,87 €
	High (mm): 7,6 Diameter (mm): 47 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 8 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 665 Angle (°): 120 Energy efficiency: G CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			



Subfamily **EggDrop F2-series Flicker Free**


Picture	Article	Description	Lot	Price/Unit
	LUE47089302F2		1	15,07 €
	Led Cob EDC / 47C / 8W / 930 / 230V / F201		9	12,56 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		90	11,41 €
			180	10,87 €
	High (mm): 7,6 Diameter (mm): 47 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 8 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 722 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			




	LUE47109272F2		1	15,20 €
	Led Cob EDC / 47C / 10W / 927 / 230V / F201		9	12,66 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers.		90	11,51 €
			180	10,96 €
	High (mm): 7,6 Diameter (mm): 47 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 10 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 831 Angle (°): 120 Energy efficiency: G CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			



Subfamily **EggDrop F2-series Flicker Free**


Picture	Article	Description	Lot	Price/Unit
	LUE47109302F2		1	15,20 €
	Led Cob EDC / 47C / 10W / 930 / 230V / F201		9	12,66 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		90	11,51 €
	High (mm): 7,6 Diameter (mm): 47 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 10 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 903 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95		180	10,96 €




	LUE47109402F2		1	15,20 €
	Led Cob EDC / 47C / 10W / 940 / 230V / F201		9	12,66 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		90	11,51 €
	High (mm): 7,6 Diameter (mm): 47 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 10 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen: 939 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95		180	10,96 €



Subfamily **EggDrop F2-series Flicker Free**

Picture	Article	Description	Lot	Price/Unit
	LUE57088302F2		1	15,44 €
	Led Cob EDC / 57C / 8W / 830 / 230V / F201		5	12,87 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		50	11,70 €
			100	11,14 €
	High (mm): 7,6 Diameter (mm): 57 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 8 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 880 Angle (°): 120 Energy efficiency: F CRI (?): 80 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			




	LUE57089272F2		1	15,44 €
	Led Cob EDC / 57C / 8W / 927 / 230V / F201		5	12,87 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		50	11,70 €
			100	11,14 €
	High (mm): 7,6 Diameter (mm): 57 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 8 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 696 Angle (°): 120 Energy efficiency: G CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			




LED TECHNOLOGY > Led modules > Led Lumens Modules

Subfamily **EggDrop F2-series Flicker Free**


Picture	Article	Description	Lot	Price/Unit
	LUE57089302F2		1	15,44 €
	Led Cob EDC / 57C / 8W / 930 / 230V / F201		5	12,87 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		50	11,70 €
			100	11,14 €
	High (mm): 7,6 Diameter (mm): 57 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 8 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 757 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			




	LUE57109272F2		1	15,56 €
	Led Cob EDC / 57C / 10W / 927 / 230V / F201		5	12,97 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		50	11,79 €
			100	11,23 €
	High (mm): 7,6 Diameter (mm): 57 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 10 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 870 Angle (°): 120 Energy efficiency: G CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			



Subfamily **EggDrop F2-series Flicker Free**


Picture	Article	Description	Lot	Price/Unit
	LUE57109302F2		1	15,56 €
	Led Cob EDC / 57C / 10W / 930 / 230V / F201		5	12,97 €
			50	11,79 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		100	11,23 €
	High (mm): 7,6 Diameter (mm): 57 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 10 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 946 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			




	LUE57128302F2		1	15,68 €
	Led Cob EDC / 57C / 12W / 830 / 230V / F201		5	13,07 €
			50	11,88 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		100	11,31 €
	High (mm): 7,6 Diameter (mm): 57 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 12 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 1260 Angle (°): 120 Energy efficiency: F CRI (?): 80 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			



Subfamily **EggDrop F2-series Flicker Free**


Picture	Article	Description	Lot	Price/Unit
	LUE57129272F2		1	15,68 €
	Led Cob EDC / 57C / 12W / 927 / 230V / F201		5	13,07 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		50	11,88 €
			100	11,31 €
	High (mm): 7,6 Diameter (mm): 57 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 12 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 997 Angle (°): 120 Energy efficiency: G CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			




	LUE57129302F2		1	15,68 €
	Led Cob EDC / 57C / 12W / 930 / 230V / F201		5	13,07 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		50	11,88 €
			100	11,31 €
	High (mm): 7,6 Diameter (mm): 57 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 12 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 1084 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			



Subfamily **EggDrop F2-series Flicker Free**


Picture	Article	Description	Lot	Price/Unit
	LUE57129402F2		1	15,68 €
	Led Cob EDC / 57C / 12W / 940 / 230V / F201		5	13,07 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		50	11,88 €
			100	11,31 €
	High (mm): 7,6 Diameter (mm): 57 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 12 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen: 1127 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			




	LUE57158302F2		1	15,83 €
	Led Cob EDC / 57C / 15W / 830 / 230V / F201		5	13,20 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		50	12,00 €
			100	11,43 €
	High (mm): 7,6 Diameter (mm): 57 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 15 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 1575 Angle (°): 120 Energy efficiency: F CRI (?): 80 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			



Subfamily **EggDrop F2-series Flicker Free**

Picture	Article	Description	Lot	Price/Unit
	LUE57159272F2		1	15,83 €
	Led Cob EDC / 57C / 15W / 927 / 230V / F201		5	13,20 €
			50	12,00 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		100	11,43 €
	High (mm): 7,6 Diameter (mm): 57 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 15 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 1246 Angle (°): 120 Energy efficiency: G CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			




	LUE57159302F2		1	15,83 €
	Led Cob EDC / 57C / 15W / 930 / 230V / F201		5	13,20 €
			50	12,00 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		100	11,43 €
	High (mm): 7,6 Diameter (mm): 57 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 15 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 1355 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			




LED TECHNOLOGY > Led modules > Led Lumens Modules

Subfamily **EggDrop F2-series Flicker Free**

Picture	Article	Description	Lot	Price/Unit
	LUE57159402F2		1	15,83 €
	Led Cob EDC / 57C / 15W / 940 / 230V / F201		5	13,20 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		50	12,00 €
			100	11,43 €
	High (mm): 7,6 Diameter (mm): 57 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 15 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen: 1409 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			







	LUEHL47F2		1	1,01 €
	Holder D47 for EDC/47C F201 white		5	0,85 €
	Holder for EggDrop modules direct to the network of 47 mm in diameter series F201		50	0,77 €
			100	0,73 €
	High (mm): 8,4 Diameter (mm): 47 Colour: White			



LED TECHNOLOGY > Led modules > Led Lumens Modules


Subfamily **EggDrop F2-series Flicker Free**

Picture	Article	Description	Lot	Price/Unit
	LUEHL57F2		1	1,07 €
	Holder D60 for EDG/57C F201 white		5	0,88 €
	Zhaga standard. 5.5mm diameter fixing holes 35mm apart between centers.		50	0,81 €
			100	0,77 €
	High (mm): 9 Diameter (mm): 60 Colour: White			
  				

	LUETT47F2		1	0,72 €
	Thermal Tape for EDC/47C F201		5	0,60 €
	Distributes the heat on the surface of the module. It should measure 6mm more in diameter than the module		50	0,55 €
			100	0,52 €
	Diameter (mm): 53			
  				

LED TECHNOLOGY > Led modules > Led Lumens Modules

Subfamily **EggDrop F2-series Flicker Free**

Picture	Article	Description	Lot	Price/Unit
	LUETT57		1	0,72 €
		Thermal Tape for EDC/57C	5	0,60 €
		UNTIL END OF STOCKS. Distributes the heat on the surface of the module. It should measure 6mm more in diameter than the module	50	0,55 €
		Diameter (mm): 63	100	0,52 €




Catalogue **LED TECHNOLOGY**

Line **Led modules**

FAMILY **Led Lumens Modules**

Subfamily **Linearon LNM-series**


linear modules 30 mm wide and lengths of 140, 280 and 560mm. With connectors on both sides for grid connection and serial connection to other modules to 270W. Design according to Zhaga Book 7. Available at 120V and 230V, with CRI 80 and optionally CRI90 and color temperatures from 2700K to 6000K

Picture	Article	Description	Lot	Price/Unit
	LUL14048301		1	10,14 €
	Led Lineal LNM14030/4.5W/830/120/C		20	9,23 €
	Automatic connectors. Dimmable with most Triac dimmers. SDCM 3		200	8,84 €
		Length (mm): 140 Width (mm): 30 High (mm): 6,5 Voltage In (Vac): 120 Intensidad In (A): 0.037 Frecuency (Hz): 50~60 Power (W): 4.5 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 65 Colour Temperature (°K): 3000 Lumen: 450 Angle (°): 120 CRI (≥): 80 Life (Hours): 50000 Dimmable: SI Power factor: >0.99		




LED TECHNOLOGY > Led modules > Led Lumens Modules

Subfamily **Linearon LNM-series**

Picture	Article	Description	Lot	Price/Unit
	LUL14049271		1	10,14 €
	Led Lineal LNM14030/4.5W/927/120/C		20	9,23 €
	Automatic connectors. Dimmable with most Triac dimmers. SDCM 3		200	8,84 €
	Length (mm): 140 Width (mm): 30 High (mm): 6,5 Voltage In (Vac): 120 Intensidad In (A): 0.037 Frecuency (Hz): 50~60 Power (W): 4.5 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 65 Colour Temperature (°K): 2700 Lumen: 368 Angle (°): 120 CRI (?): 90 Life (Hours): 50000 Dimmable: SI Power factor: >0.99			



	LUL14CV		1	0,91 €
	Lineal led cover 140 transparent		20	0,85 €
	Length (mm): 140 Width (mm): 30 High (mm): 6 Colour: Transparent		200	0,78 €



LED TECHNOLOGY > Led modules > Led Lumens Modules

Subfamily **Linearon LNM-series**

Picture	Article	Description	Lot	Price/Unit
	LUL28CV		1	1,17 €
		Cover for Led Lineal 280 transparent	10	1,11 €
		Length (mm): 280 Width (mm): 30 High (mm): 6 Colour: Transparent	100	1,04 €

















	LUL28CVP		1	1,17 €
		Cover for Led Lineal 280 opal	10	1,11 €
		Length (mm): 280 Width (mm): 30 High (mm): 6 Colour: Opal	100	1,04 €



LED TECHNOLOGY > Led modules > Led Lumens Modules

Subfamily **Linearon LNM-series**

Picture	Article	Description	Lot	Price/Unit
	LUL56098402		1	13,26 €
	Lineal LNM Led 56030/9W/840/230/C		10	12,09 €
	Automatic connectors. Dimmable with most Triac dimmers. SDCM 3		100	11,57 €
	Length (mm): 560 Width (mm): 30 High (mm): 6,5 Voltage In (Vac): 230 Intensidad In (A): 0.039 Frecuency (Hz): 50~60 Power (W): 9 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 65 Colour Temperature (°K): 4000 Lumen: 936 Angle (°): 120 CRI (?): 80 Life (Hours): 50000 Dimmable: SI Power factor: >0.99			
     				

	LUL56188402		1	17,55 €
	Lineal Led LNM56030/18W/840/230/C		10	15,99 €
	Automatic connectors. Dimmable with most Triac dimmers. SDCM 3		100	15,21 €
	Length (mm): 560 Width (mm): 30 High (mm): 6,5 Voltage In (Vac): 230 Intensidad In (A): 0.078 Frecuency (Hz): 50~60 Power (W): 18 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 65 Colour Temperature (°K): 4000 Lumen: 1872 Angle (°): 120 CRI (?): 80 Life (Hours): 50000 Dimmable: SI Power factor: >0.99			
     				

LED TECHNOLOGY > Led modules > Led Lumens Modules

Subfamily **Linearon LNM-series**

Picture	Article	Description	Lot	Price/Unit
	LUL56CV		1	2,47 €
		Cover for Led Lineal 560 transparent	10	2,21 €
		Length (mm): 560 Width (mm): 30 High (mm): 6 Colour: Transparent	100	2,08 €



	LUL56CVP		1	2,47 €
		Cover for Led Lineal 560 opal	10	2,21 €
		Length (mm): 560 Width (mm): 30 High (mm): 6 Colour: Opal	100	2,08 €



Catalogue **LED TECHNOLOGY**


Line **Led modules**

FAMILY **Led Lumens Modules**

Subfamily **LED modules Ergon COB H1 Lumens**

Led modules COB at low voltage with powers. Nominals from 9 to 114W. Efficiencies up to 158lm / W. CRI 80 and optionally CRI90. Long life and robustness thanks to its Flipchip technology with no internal wiring. Dimensions compatible with most accessories on the market. Color temperatures from 2700K to 5000K with MacAdam3.







Ver Manual de producto [aquí.](#)







Picture	Article	Description	Lot	Price/Unit
	LUS1309840		1	2,08 €
	Led Cob ERC13009/S/840/H1		49	1,95 €
	SDCM 3		490	1,89 €

Length (mm): 13,5 Width (mm): 13,5 High (mm): 1,7
 Voltage In (Vdc): 34.1 Intensidad In (A): 0.27
 Power (W): 9.2 Temperature (°C): -40~+100
 Room Temperature (°C): -40~+100
 Colour Temperature (°K): 4000 Lumen: 1300
 Angle (°): 115 CRI (≥): 80 Life (Hours): 50000
 Dimmable: SI









Subfamily **LED modules Ergon COB H1 Lumens**







Picture	Article	Description	Lot	Price/Unit
	LUS1312840		1	3,06 €
	Led Cob ERC13012/S/840/H1		49	2,86 €
	SDCM 3		490	2,73 €
		Length (mm): 13,5 Width (mm): 13,5 High (mm): 1,7 Voltage In (Vdc): 33.8 Intensidad In (A): 0.36 Power (W): 12.2 Temperature (°C): -40+100 Room Temperature (°C): -40~+100 Colour Temperature (°K): 4000 Lumen: 1669 Angle (°): 115 CRI (?): 80 Life (Hours): 50000 Dimmable: SI		
				

	LUS2025830		1	6,11 €
	Led Cob ERC20025/S/830/H1		30	5,72 €
	SDCM 3		300	5,46 €
		Length (mm): 19 Width (mm): 19 High (mm): 1,7 Voltage In (Vdc): 33.4 Intensidad In (A): 0.72 Power (W): 24 Temperature (°C): -40+100 Room Temperature (°C): -40~+100 Colour Temperature (°K): 3000 Lumen: 3336 Angle (°): 115 CRI (?): 80 Life (Hours): 50000 Dimmable: SI		
				







LED TECHNOLOGY > Led modules > Led Lumens Modules







Subfamily **LED modules Ergon COB H1 Lumens**

Picture	Article	Description	Lot	Price/Unit
	LUS2025927		1	6,11 €
	Led Cob ERC20025/S/927/H1		30	5,72 €
	SDCM 3		300	5,46 €
	Length (mm): 19 Width (mm): 19 High (mm): 1,7 Voltage In (Vdc): 33.4 Intensidad In (A): 0.72 Power (W): 24 Temperature (°C): -40+100 Room Temperature (°C): -40~+100 Colour Temperature (°K): 2700 Lumen: 2631 Angle (°): 120 CRI (?): 90 Life (Hours): 50000 Dimmable: SI			
	   			


	LUS3035927		1	10,27 €
	Led Cob ERC30035/S/927/H1		16	9,75 €
	SDCM 3		160	9,23 €
	Length (mm): 28 Width (mm): 28 High (mm): 1,7 Voltage In (Vdc): 33.5 Intensidad In (A): 1.08 Power (W): 36 Temperature (°C): -40+100 Room Temperature (°C): -40~+100 Colour Temperature (°K): 2700 Lumen: 4245 Angle (°): 115 CRI (?): 90 Life (Hours): 50000 Dimmable: SI			
	   			

Subfamily **LED modules Ergon COB H1 Lumens**

Picture	Article	Description	Lot	Price/Unit
	LUS3055830		1	14,17 €
	Led Cob ERC30055/S/830/H1		16	13,52 €
	SDCM 3		160	12,94 €
		Length (mm): 28 Width (mm): 28 High (mm): 1,7 Voltage In (Vdc): 50 Intensidad In (A): 1.08 Power (W): 54 Temperature (°C): -40+100 Room Temperature (°C): -40~+100 Colour Temperature (°K): 3000 Lumen: 7572 Angle (°): 115 CRI (?): 80 Life (Hours): 50000 Dimmable: SI		
				


	LUS3085830		1	25,74 €
	Led Cob ERC30085/S/830/H1		16	24,44 €
	SDCM 3		160	23,27 €
		Length (mm): 28 Width (mm): 28 High (mm): 1,7 Voltage In (Vdc): 50 Intensidad In (A): 1.62 Power (W): 81 Temperature (°C): -40+100 Room Temperature (°C): -40~+100 Colour Temperature (°K): 3000 Lumen: 10471 Angle (°): 115 CRI (?): 80 Life (Hours): 50000 Dimmable: SI		
				

Catalogue **LED TECHNOLOGY**
 Line **Led modules**
 Family **Led Lumens Modules**
 Subfamily **LEDmodules Ergon COB H2 Lumens**

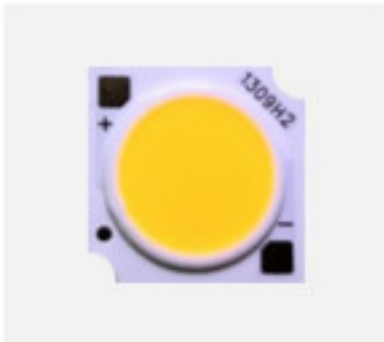Picture	Article	Description	Lot	Price/Unit
	LUT1309840		1	2,31 €
	Led Cob ERC 1309H2-840 CRI80 4000K		49	2,00 €
	SDCM 3		245	1,91 €
			490	1,82 €

Length (mm): 13,5 Width (mm): 13,5 High (mm): 1,55
 Voltage In (Vdc): 34.8 Intensidad In (A): 0.35
 Power (W): 12.2 Room Temperature (°C): -30~+100
 Colour Temperature (°K): 4000 Lumen: 1885
 Angle (°): 115 CRI (≥): 80 Dimmable: SI

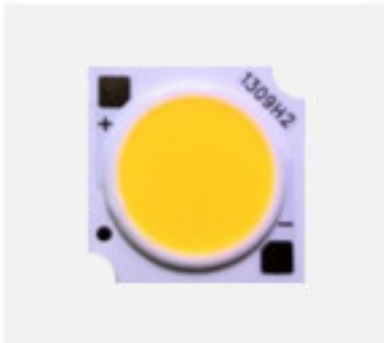


	LUT1309940		490 (Pedido mínimo)	1,99 €
	Led Cob ERC 1309H2-940 CRI90 4000K		980	1,94 €
	SDCM 3		1470	1,87 €

Length (mm): 13,5 Width (mm): 13,5 High (mm): 1,55
 Voltage In (Vdc): 34.8 Intensidad In (A): 0.35
 Power (W): 12.2 Room Temperature (°C): -30~+100
 Colour Temperature (°K): 4000 Lumen: 1556
 Angle (°): 115 CRI (≥): 90 Dimmable: SI




LED TECHNOLOGY > Led modules > Led Lumens Modules

Subfamily **LEDmodules Ergon COB H2 Lumens**


Picture	Article	Description	Lot	Price/Unit
	LUT1318940	Led Cob ERC 1318H2-940 CRI90 4000K	490 (Pedido mínimo)	2,47 €
	SDCM 3		980	2,41 €
			1470	2,33 €
		Length (mm): 13,5 Width (mm): 13,5 High (mm): 1,55 Voltage In (Vdc): 35.5 Intensidad In (A): 0.5 Power (W): 17.8 Room Temperature (°C): -30~+100 Colour Temperature (°K): 4000 Lumen: 2280 Angle (°): 115 CRI (?): 90 Dimmable: SI		



	LUT2032830	Led Cob ERC 2032H2-830 CRI80 3000K	1	5,47 €
	SDCM 3		25	4,76 €
			125	4,54 €
			250	4,32 €
		Length (mm): 19 Width (mm): 19 High (mm): 1,55 Voltage In (Vdc): 35 Intensidad In (A): 0.9 Power (W): 31.5 Room Temperature (°C): -30~+100 Colour Temperature (°K): 3000 Lumen: 4760 Angle (°): 115 CRI (?): 80 Dimmable: SI		




Subfamily **LEDmodules Ergon COB H2 Lumens**

Picture	Article	Description	Lot	Price/Unit
	LUT2032840		1	5,47 €
	Led Cob ERC 2032H2-840 CRI80 4000K		25	4,76 €
			125	4,54 €
	SDCM 3		250	4,32 €

Length (mm): 19 Width (mm): 19 High (mm): 1,55
 Voltage In (Vdc): 35 Intensidad In (A): 0.9
 Power (W): 31.5 Room Temperature (°C): -30~+100
 Colour Temperature (°K): 4000 Lumen: 4960
 Angle (°): 115 CRI (?): 80 Dimmable: SI




	LUT2032930		1	5,55 €
	Led Cob ERC 2032H2-930 CRI90 3000K		25	4,84 €
			125	4,60 €
	SDCM 3		250	4,38 €

Length (mm): 19 Width (mm): 19 High (mm): 1,55
 Voltage In (Vdc): 35 Intensidad In (A): 0.9
 Power (W): 31.5 Room Temperature (°C): -30~+100
 Colour Temperature (°K): 3000 Lumen: 4220
 Angle (°): 115 CRI (?): 90 Dimmable: SI




LED TECHNOLOGY > Led modules > Led Lumens Modules

Subfamily **LEDmodules Ergon COB H2 Lumens**

Picture	Article	Description	Lot	Price/Unit
	LUT2032940	Led Cob ERC 2032H2-940 CRI90 4000K	250 (Pedido mínimo)	4,65 €
	SDCM 3		500	4,52 €
			750	4,38 €

Length (mm): 19 Width (mm): 19 High (mm): 1,55
Voltage In (Vdc): 35 Intensidad In (A): 0.9
Power (W): 31.5 Room Temperature (°C): -30~+100
Colour Temperature (°K): 4000 Lumen: 4420
Angle (°): 115 CRI (?): 90 Dimmable: SI




	LUT3040830	Led Cob ERC 3040H2-830 CRI80 3000K	1	8,79 €
	SDCM 3		16	7,64 €
			80	7,28 €
			160	6,93 €

Length (mm): 28 Width (mm): 28 High (mm): 1,55
Voltage In (Vdc): 34.2 Intensidad In (A): 1.05
Power (W): 35.9 Room Temperature (°C): -30~+100
Colour Temperature (°K): 3000 Lumen: 5820
Angle (°): 115 CRI (?): 80 Dimmable: SI




LED TECHNOLOGY > Led modules > Led Lumens Modules

Subfamily **LEDmodules Ergon COB H2 Lumens**

Picture	Article	Description	Lot	Price/Unit
	LUT3040840		1	8,79 €
	Led Cob ERC 3040H2-840 CRI80 4000K		16	7,64 €
	SDCM 3		80	7,28 €
			160	6,93 €

Length (mm): 28 Width (mm): 28 High (mm): 1,55
Voltage In (Vdc): 34.2 Intensidad In (A): 1.05
Power (W): 35.9 Room Temperature (°C): -30~+100
Colour Temperature (°K): 4000 Lumen: 6010
Angle (°): 115 CRI (?): 80 Dimmable: SI



	LUT3040940		160 (Pedido mínimo)	7,37 €
	Led Cob ERC 3040H2-940 CRI90 4000K		320	7,16 €
	SDCM 3		480	6,96 €

Length (mm): 28 Width (mm): 28 High (mm): 1,55
Voltage In (Vdc): 34.2 Intensidad In (A): 1.05
Power (W): 35.9 Room Temperature (°C): -30~+100
Colour Temperature (°K): 4000 Lumen: 5320
Angle (°): 115 CRI (?): 90 Dimmable: SI




Catalogue **LED TECHNOLOGY**

Line **Led modules**

FAMILY **Led Lumens Modules**

Subfamily **Downlight Module Series F**






Led module 100mm Diameter. ECO desing according to ERP directives

Picture	Article	Description	Lot	Price/Unit
	LUD100169272		1	16,95 €
	Led Module DLM100C/16W/927/230V/ F201		12	15,41 €
			120	14,01 €
		ECO design according to ERP directives. Automatic connectors. Dimmables by leading or trailing edge dimmers. No cover. Cover code LUD100CV to be ordered separately	240	13,34 €
	Diameter (mm): 100 Voltage In (Vac): 230 Intensidad In (A): 0.063 Frecuency (Hz): 50~60 Power (W): 16 Temperature (°C): -40~+85 Room Temperature (°C): -40~+85 Colour Temperature (°K): 2700 Lumen: 1520 Angle (°): 120 CRI (≥): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95			








LED TECHNOLOGY > Led modules > Led Lumens Modules






Subfamily **Downlight Module Series F**

Picture	Article	Description	Lot	Price/Unit
	LUD100169302		1	16,95 €
	Led Module DLM100C/16W/930/230V/ F201		12	15,41 €
	ECO design according to ERP directives. Automatic connectors. Dimmables by leading or trailing edge dimmers. No cover. Cover code LUD100CV to be ordered separately		120	14,01 €
			240	13,34 €
	Diameter (mm): 100 Voltage In (Vac): 230 Intensidad In (A): 0.063 Frecuency (Hz): 50~60 Power (W): 16 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Colour Temperature (°K): 3000 Lumen: 1616 Angle (°): 120 CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95			
				
  				
	LUD100CV		1	1,51 €
	DLM100C F201 Led Module Cover		12	1,26 €
	Transparent plastic cover for DLM 100C F201		120	1,20 €
			240	1,16 €













Catalogue **LED TECHNOLOGY**
 Line **Led modules**
 FAmily **Modules Led VEGAH 220v**
 Subfamily **Module LED VEGAH circular directly to network**

Picture	Article	Description	Lot	Price/Unit
	18GC04043494B	Circular module d39 4led 4W 230V 4000K CRI90 with 40cm FEP	1	9,57 €
		ECO design ERP. SVM 0.4 and Pst LM 0.9. Energy Class E		
		High (mm): 8 Diameter (mm): 39 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 4 Room Temperature (°C): -40~+65 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen: 460 Angle (°): 130 CRI (≥): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.98 Colour consistency: SDCM 3		
		 		






	18GR30183394B	Circular module d70 30led 18W 230V 3000K CRI90 with 40cm FEP	1	19,76 €
		ECO design ERP. SVM 0.4 and Pst LM 0.9. Energy Class E		
		Diameter (mm): 70 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 18 Room Temperature (°C): -40~+65 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 2070 Angle (°): 130 CRI (≥): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.98 Colour consistency: SDCM 3		
		 		






Subfamily **Module LED VEGAH circular directly to network**

Picture	Article	Description	Lot	Price/Unit
	18GR72103294B		1	21,45 €
		Circular module d70 72led 10W 230V 2700K CRI90 with 40cm FEP	10	19,50 €
			50	18,94 €
		Energy Class E	100	18,59 €
		Diameter (mm): 70 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 10 Room Temperature (°C): -40~+65 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 1200 Angle (°): 130 CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: 0.98 Colour consistency: SDCM 3		
		 		


	18GR72103394B		1	21,45 €
		Circular module d70 72led 10W 230V 3000K CRI90 with 40cm FEP	10	19,50 €
			50	18,94 €
		Energy Class E	100	18,59 €
		Diameter (mm): 70 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 10 Room Temperature (°C): -40~+65 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 1200 Angle (°): 130 Energy efficiency: E CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: 0.98 Colour consistency: 3		
		 		

Subfamily **Module LED VEGAH circular directly to network**

Picture	Article	Description	Lot	Price/Unit
	18GR72143294B		1	21,45 €
		Circular module d70 72led 14W 230V 2700K CRI90 with 40cm FEP	10	19,50 €
			50	18,94 €
		Energy Class E	100	18,59 €
		Diameter (mm): 70 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 14 Room Temperature (°C): -40~+65 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 1680 Angle (°): 130 Energy efficiency: E CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: 0.98 Colour consistency: SDCM 3		
	  			


	18GR72143394B		1	21,45 €
		Circular module d70 72led 14W 230V 3000K CRI90 with 40cm FEP	10	19,50 €
			50	18,94 €
		Energy Class E	100	18,59 €
		Diameter (mm): 70 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 14 Room Temperature (°C): -40~+65 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 1680 Angle (°): 130 Energy efficiency: E CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: 0.98 Colour consistency: 3		
	  			

Catalogue **LED TECHNOLOGY**
 Line **Led modules**
 FAmily **Modules Led VEGAH 220v**
 Subfamily **LED module VEGAH lineal directly to the network**

Picture	Article	Description	Lot	Price/Unit
	18GS302033MB		1	33,19 €
		Linear module 420x30 mm 30led 20W 230V 3000K with connectors	20	30,17 €
			100	28,73 €
		ECO design ERP. SVM 0.4 and Pst LM 0.9. Energy Class E		
		Length (mm): 420 Width (mm): 30 High (mm): 15,5 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 20 Room Temperature (°C): -40~+65 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 2300 Angle (°): 130 CRI (≥): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.98 Colour consistency: SDCM 3		



Catalogue **LED TECHNOLOGY**
 Line **Led modules**
 Family **Heat sink COB modules**
 Subfamily **heatsinks for Lumens modules**

Picture	Article	Description	Lot	Price/Unit
	G500001		1	51,48 €
	200 gram conductive silicone tube		5	42,90 €
	To improve contact and heat transfer between moodulo and heatsink. Thermal conduction 0.45W / mK		10	35,75 €

	G5CM7050		75 (Pedido mínimo)	9,30 €
	Heatsink 7050 70x50mm Silver			
	For modules LUMENS Series EggDrop EDC47C 10W High (mm): 50 Diameter (mm): 70 Colour: Silver			




LED TECHNOLOGY > Led modules > Heat sink COB modules

Subfamily **heatsinks for Lumens modules**

Picture	Article	Description	Lot	Price/Unit
	G5CM7080		1	17,72 €
	Heatsink 7080 70x80mm Silver		5	14,77 €
	For modules LUMENS Series EggDrop EDC47C 12 and 15W		10	13,42 €
			50	12,78 €
	High (mm): 80 Diameter (mm): 70 Colour: Silver			
				
	G5CM9950		1	26,52 €
	Heatsink 9950 99x50mm Silver		5	24,10 €
	For modules LUMENS Series EggDrop EDC57C 10 and 15W		10	21,92 €
			50	20,87 €
	High (mm): 50 Diameter (mm): 99 Colour: Silver			
				
	G5CM9980		1	25,65 €
	Heatsink 9980 99x80mm Silver		5	23,32 €
	For modules LUMENS Series EggDrop EDC57C 20,30 and 40W		10	21,22 €
			50	20,16 €
	High (mm): 80 Diameter (mm): 99 Colour: Silver			
				


Catalogue **LED TECHNOLOGY**
 Line **Led modules**
 FAmily **Constant Voltage Led Modules**
 Subfamily **Linear LED modules at constant voltage**

Picture	Article	Description	Lot	Price/Unit
	18RHF7721062SG2		1	8,78 €
	Linear module 288mm 72led 10W 24VDC 2700Kwith connectors		20	8,00 €
			100	7,61 €
	Automatic connection using 4 Molex connectors. Possibility of multiple connection with connection pin reference 18RHF2060. Length (mm): 288 Width (mm): 10 High (mm): 4 Voltage In (Vdc): 24 Power (W): 10 Room Temperature (°C): -40~+55 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Connection: Automatic Lumen: 2000 Angle (°): 130 Energy efficiency: C Incandescence equivalence (W): 200 CRI (≥): 80 Life (Hours): 50000 Dimmable: SI Colour consistency: 3			



LED TECHNOLOGY > Led modules > Constant Voltage Led Modules


Subfamily **Linear LED modules at constant voltage**

Picture	Article	Description	Lot	Price/Unit
	18RHF7721063SG2		1	8,78 €
	Linear module 288mm 72led 10W 24VDC 3000K with connectors		20	8,00 €
			100	7,61 €

Automatic connection using 4 Molex connectors.
Possibility of multiple connection with connection pin reference 18RHF2060.

Length (mm): 288 Width (mm): 10 High (mm): 4
Voltage In (Vdc): 24 Power (W): 10
Room Temperature (°C): -40~+55
Critical Temperature (°C): 85
Colour Temperature (°K): 3000 Connection: Automatic
Lumen: 2000 Angle (°): 130 Energy efficiency: C
Incandescence equivalence (W): 200 CRI (?): 80
Life (Hours): 50000 Dimmable: SI
Colour consistency: 3



	18RHF2060		1	0,68 €
	Connection pin for linear module 288mm 72led		20	0,61 €
			100	0,59 €

