






Catalogue **LED TECHNOLOGY**
 Line **Led modules**
 Family **Constant Current Led Modules**
 Subfamily **Contant Current Led Modules**





Picture	Article	Description	Lot	Price/Unit
	LC0B00013M		1	8,45 €
	Led spotlight CRI80 3000K 30° 100 Lm 1W. M16 Nut and 50cm AWG20 cable		50	7,02 €
			100	6,70 €
	Anodized aluminum body + M16x1.5 nut		500	6,37 €
	High (mm): 18,3 Diameter (mm): 17 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1 Lumen: 100 Candelas: 290 Angle (°): 30 Energy efficiency: F CRI (≥): 80 Life (Hours): 30000 Ingress Protection: IP20 Dimmable: SI			
				

	LC0A01062M		1	16,76 €
	Led module KC01 350mA 1,25W 2700K lens 45° 15cm red-black cable		10	15,24 €
			20	13,85 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.		100	13,20 €
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 2700 Lumen: 119 Angle (°): 45 Energy efficiency: A++ CRI (≥): 80 Ingress Protection: IP20			
				

LED TECHNOLOGY > Led modules > Constant Current Led Modules




Subfamily **Contant Current Led Modules**




Picture	Article	Description	Lot	Price/Unit
	LC0A01062N		1	16,76 €
	Led module KC01 350mA 1,25W 2700K lens 25°		10	15,24 €
	15cm red-black cable		20	13,85 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.		100	13,20 €
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 2700 Lumen: 119 Angle (°): 25 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
		  		

	LC0A01062W		1	16,76 €
	Led module KC01 350mA 1,25W 2700K lens 60°		10	15,24 €
	15cm red-black cable		20	13,85 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.		100	13,20 €
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 2700 Lumen: 119 Angle (°): 60 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
		  		

LED TECHNOLOGY > Led modules > Constant Current Led Modules





Subfamily **Contant Current Led Modules**





Picture	Article	Description	Lot	Price/Unit
	LC0A01063M		1	16,76 €
	Led module KC01 350mA 1,25W 3000K lens 45°		10	15,24 €
	15cm red-black cable		20	13,85 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.		100	13,20 €
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 3000 Lumen: 123 Angle (°): 45 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
	CE	 		

	LC0A01063N		1	16,76 €
	Led module KC01 350mA 1,25W 3000K lens 25°		10	15,24 €
	15cm red-black cable		20	13,85 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.		100	13,20 €
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 3000 Lumen: 123 Angle (°): 25 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
	CE	 		

LED TECHNOLOGY > Led modules > Constant Current Led Modules





Subfamily **Contant Current Led Modules**





Picture	Article	Description	Lot	Price/Unit
	LC0A01063W		1	16,76 €
	Led module KC01 350mA 1,25W 3000K lens 60°		10	15,24 €
	15cm red-black cable		20	13,85 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.		100	13,20 €
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 3000 Lumen: 123 Angle (°): 60 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
		  		

	LC0A01064M		1	16,76 €
	Led module KC01 350mA 1,25W 4000K lens 45°		10	15,24 €
	15cm red-black cable		20	13,85 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.		100	13,20 €
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 4000 Lumen: 130 Angle (°): 45 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
		  		

LED TECHNOLOGY > Led modules > Constant Current Led Modules




Subfamily **Contant Current Led Modules**




Picture	Article	Description	Lot	Price/Unit
	LC0A01064N		1	16,76 €
	Led module KC01 350mA 1,25W 4000K lens 25°		10	15,24 €
	15cm red-black cable		20	13,85 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.		100	13,20 €
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 4000 Lumen: 130 Angle (°): 25 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
		  		

	LC0A01064W		1	16,76 €
	Led module KC01 350mA 1,25W 4000K lens 60°		10	15,24 €
	15cm red-black cable		20	13,85 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.		100	13,20 €
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 4000 Lumen: 130 Angle (°): 60 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
		  		

LED TECHNOLOGY > Led modules > Constant Current Led Modules







Subfamily **Contant Current Led Modules**

Picture	Article	Description	Lot	Price/Unit
	LC0A01065M		1	16,76 €
	Led module KC01 350mA 1,25W 5000K lens 45°		10	15,24 €
	15cm red-black cable		20	13,85 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.		100	13,20 €
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 5000 Lumen: 150 Angle (°): 45 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
	CE	 		

	LC0A01065N		1	16,76 €
	Led module KC01 350mA 1,25W 5000K lens 25°		10	15,24 €
	15cm red-black cable		20	13,85 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.		100	13,20 €
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.5 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 5000 Lumen: 150 Angle (°): 25 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
	CE	 		



LED TECHNOLOGY > Led modules > Constant Current Led Modules

Subfamily **Contant Current Led Modules**

Picture	Article	Description	Lot	Price/Unit
	LC0A01065W		1	16,76 €
	Led module KC01 350mA 1,25W 5000K lens 60°		10	15,24 €
	15cm red-black cable		20	13,85 €
			100	13,20 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 17mm diameter hole with its thread.			
	High (mm): 26 Diameter (mm): 20 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 5000 Lumen: 150 Angle (°): 60 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
	CE	 		
	LC0C01032M		1	19,05 €
	Led module KC02 350mA 1,25W 2700K 45° lens		10	17,32 €
	15cm red-black cable		20	15,74 €
			100	14,99 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 30mm diameter hole with its thread.			
	High (mm): 26,3 Diameter (mm): 33,5 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 2700 Lumen: 119 Angle (°): 45 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
	CE	 		







LED TECHNOLOGY > Led modules > Constant Current Led Modules

Subfamily **Contant Current Led Modules**

Picture	Article	Description	Lot	Price/Unit
	LC0C01032N		1	19,05 €
	Led module KC02 350mA 1W 2700K 30° lens 15cm red-black cable		10	17,32 €
			20	15,74 €
			100	14,99 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 30mm diameter hole with its thread.			
	High (mm): 26,3 Diameter (mm): 33,5 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 2700 Lumen: 119 Angle (°): 30 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
	CE		EW	
	LC0C01033M		1	19,05 €
	Led module KC02 350mA 1W 3000K lens 45° 15cm red-black cable		10	17,32 €
			20	15,74 €
			100	14,99 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 30mm diameter hole with its thread.			
	High (mm): 26,3 Diameter (mm): 33,5 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 3000 Lumen: 123 Angle (°): 45 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
	CE		EW	







LED TECHNOLOGY > Led modules > Constant Current Led Modules

Subfamily **Contant Current Led Modules**

Picture	Article	Description	Lot	Price/Unit
	LC0C01033N		1	19,05 €
	Led module KC02 350mA 1W 3000K lens 30° 15cm red-black cable		10	17,32 €
			20	15,74 €
			100	14,99 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 30mm diameter hole with its thread.			
	High (mm): 26,3 Diameter (mm): 33,5 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 3000 Lumen: 130 Angle (°): 30 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
	CE	 		
	LC0C01034M		1	19,05 €
	Led module KC02 350mA 1W 4000K lens 45° 15cm red-black cable		10	17,32 €
			20	15,74 €
			100	14,99 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 30mm diameter hole with its thread.			
	High (mm): 26,3 Diameter (mm): 33,5 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 4000 Lumen: 130 Angle (°): 45 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
	CE	 		


LED TECHNOLOGY > Led modules > Constant Current Led Modules

Subfamily **Contant Current Led Modules**

Picture	Article	Description	Lot	Price/Unit
	LC0C01034N		1	19,05 €
	Led module KC02 350mA 1W 4000K 30° lens 15cm red-black cable		10	17,32 €
			20	15,74 €
			100	14,99 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 30mm diameter hole with its thread.			
	High (mm): 26,3 Diameter (mm): 33,5 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 4000 Lumen: 130 Angle (°): 30 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
	CE	 		
	LC0C01035M		1	19,05 €
	Led module KC02 350mA 1W 5000K lens 45° 15cm red-black cable		10	17,32 €
			20	15,74 €
			100	14,99 €
	Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 30mm diameter hole with its thread.			
	High (mm): 26,3 Diameter (mm): 33,5 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 5000 Lumen: 150 Angle (°): 45 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20			
	CE	 		


LED TECHNOLOGY > Led modules > Constant Current Led Modules

Subfamily **Contant Current Led Modules**


Picture	Article	Description	Lot	Price/Unit
	LC0C01035N		1	19,05 €
		Led module KC02 350mA 1W 5000K 30° lens 15cm red-black cable	10	17,32 €
			20	15,74 €
		Anodized aluminum body and plastic nut. IP44 and any length of cable can be made on request. Mounting in a 30mm diameter hole with its thread.	100	14,99 €
		High (mm): 26,3 Diameter (mm): 33,5 Voltage In (Vdc): 3 Intensidad In (A): 0.35 Power (W): 1.25 Room Temperature (°C): -20~+40 Colour Temperature (°K): 5000 Lumen: 150 Angle (°): 30 Energy efficiency: A++ CRI (?): 80 Ingress Protection: IP20		




Catalogue **LED TECHNOLOGY**
 Line **Led modules**
 FAmily **Constant Current Led Modules**
 Subfamily **Constant current linear modules**

Picture	Article	Description	Lot	Price/Unit
	LTLM140830		1	2,08 €
	Linear LED LM140/20E16 830H		72	1,90 €
			144	1,76 €
		Length (mm): 140 Width (mm): 20 Intensidad In (A): 0.5 Power (W): 5.4 Room Temperature (°C): -40~+55 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen/Watt: 150 Angle (°): 120 Energy efficiency: D CRI (≥): 80 Reference: 128227-830H		




	LTLM140927		1	1,81 €
	Linear LED LM140/20E16 927H		72	1,64 €
			144	1,52 €
		Length (mm): 140 Width (mm): 20 Intensidad In (A): 0.5 Power (W): 5.4 Room Temperature (°C): -40~+55 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen/Watt: 131 Angle (°): 120 Energy efficiency: D CRI (≥): 90 Reference: 128227-927H		




LED TECHNOLOGY > Led modules > Constant Current Led Modules

Subfamily **Constant current linear modules**

Picture	Article	Description	Lot	Price/Unit
	LTLM140930		1	1,81 €
	Linear LED LM140/20E16 930H		72	1,64 €
			144	1,52 €
		Length (mm): 140 Width (mm): 20 Intensidad In (A): 0.5 Power (W): 5.4 Room Temperature (°C): -40~+55 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen/Watt: 135 Angle (°): 120 Energy efficiency: D CRI (?): 90 Reference: 128227-930H		




	LTLM140940		1	1,81 €
	Linear LED LM140/20E16 940H		72	1,64 €
			144	1,52 €
		Length (mm): 140 Width (mm): 20 Intensidad In (A): 0.5 Power (W): 5.4 Room Temperature (°C): -40~+55 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen/Watt: 142 Angle (°): 120 Energy efficiency: D CRI (?): 90 Reference: 128227-940H		




LED TECHNOLOGY > Led modules > Constant Current Led Modules

Subfamily **Constant current linear modules**

Picture	Article	Description	Lot	Price/Unit
	LTLM280927		1	2,77 €
	Linear LED LM280/20E32 927H		36	2,52 €
			72	2,34 €
		Length (mm): 279,4 Width (mm): 20 Intensidad In (A): 0.5 Power (W): 11 Room Temperature (°C): -40~+55 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen/Watt: 131 Angle (°): 120 Energy efficiency: D CRI (?): 90		
	Reference: 128083-927H			




	LTLM280930		1	2,77 €
	Linear LED LM280/20E32 930H		36	2,52 €
			72	2,34 €
		Length (mm): 279,4 Width (mm): 20 Intensidad In (A): 0.5 Power (W): 11 Room Temperature (°C): -40~+55 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen/Watt: 135 Angle (°): 120 Energy efficiency: D CRI (?): 90		
	Reference: 128083-930H			




LED TECHNOLOGY > Led modules > Constant Current Led Modules

Subfamily **Constant current linear modules**

Picture	Article	Description	Lot	Price/Unit
	LTLM280940		1	2,77 €
	Linear LED LM280/20E32 940H		36	2,52 €
			72	2,34 €
		Length (mm): 279,4 Width (mm): 20 Intensidad In (A): 0.5 Power (W): 11 Room Temperature (°C): -40~+55 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen/Watt: 142 Angle (°): 120 Energy efficiency: D CRI (?): 90 Reference: 128083-940H		



	LTLM560927		1	4,43 €
	Linear LED LM560/20E64 927H		36	4,03 €
			72	3,73 €
		Length (mm): 559,6 Width (mm): 20 Intensidad In (A): 0.5 Power (W): 22 Room Temperature (°C): -40~+55 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen/Watt: 131 Angle (°): 120 Energy efficiency: D CRI (?): 90 Reference: 128082-927H		



LED TECHNOLOGY > Led modules > Constant Current Led Modules

Subfamily **Constant current linear modules**

Picture	Article	Description	Lot	Price/Unit
	LTLM560930		1	4,43 €
	Linear LED LM560/20E64 930H		36	4,03 €
			72	3,73 €
		Length (mm): 559,6 Width (mm): 20 Intensidad In (A): 0.5 Power (W): 22 Room Temperature (°C): -40~+55 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen/Watt: 135 Angle (°): 120 Energy efficiency: D CRI (?): 90		
	Reference: 128082-930H			



	LTLM560940		1	4,43 €
	Linear LED LM560/20E64 940H		36	4,03 €
			72	3,73 €
		Length (mm): 559,6 Width (mm): 20 Intensidad In (A): 0.5 Power (W): 22 Room Temperature (°C): -40~+55 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen/Watt: 142 Angle (°): 120 Energy efficiency: D CRI (?): 90		
	Reference: 128082-940H			







Catalogue **LED TECHNOLOGY**

Line **Led modules**

FAMILY **Battery Led Modules**









Subfamily **LED modules to battery**

Download led module with battery catalogue [here.](#)

Picture	Article	Description	Lot	Price/Unit
	G5K0040M-7		1	36,93 €
	Module led battery 290 Lm 3000K IP65 direct charge Micro-B USB.		10	33,58 €
			48	30,54 €
	Direct charging via micro-B USB socket. 5V-2A charger and USB cable not included, order separately.		96	29,07 €
	High (mm): 62 Diameter (mm): 120 Colour: White Voltage In (Vdc): 5 Power (W): 3 Colour Temperature (°K): 3000 Lumen: 290 CRI (≥): 80 Ingress Protection: IP65 Dimmable: SI			
				
	G5K0040M-3C		1	41,35 €
	Module LED battery IP67 290 lm 3000K Charging induction. USB -C		10	37,61 €
			48	34,18 €
	Charging via induction base with USB type C. Recommended charger code G5K0021F with 1 m USB type A cable - USB type C not included. Order separately.		96	32,57 €
	High (mm): 62 Diameter (mm): 120 Colour: White Voltage In (Vdc): 5 Power (W): 3 Colour Temperature (°K): 3000 Lumen: 290 CRI (≥): 80 Ingress Protection: IP67 Dimmable: SI			
				







LED TECHNOLOGY > Led modules > Battery Led Modules

Subfamily **LED modules to battery**

Picture	Article	Description	Lot	Price/Unit
	G5K0021F		1	7,22 €
	EUR 5V-2A charger with rear USB socket with 1m cable		10	6,55 €
			50	5,95 €
			100	5,67 €
	Colour: White Voltage In (Vac): 100~240 Voltage Out (Vdc): 5 Intensidad In (A): 0.5 Intensidad Out (A): 2 Frecuency (Hz): 50~60			
	 			
	G5K0021FC		1	7,70 €
	EUR 5V-2A charger with rear USB socket with 1m USB-USB-C cable		10	6,99 €
			50	6,36 €
			100	6,06 €
	Colour: White Voltage In (Vac): 100~240 Voltage Out (Vdc): 5 Intensidad In (A): 0.5 Intensidad Out (A): 2 Frecuency (Hz): 50~60			
	 			
	G5K0021U		1	0,98 €
	USB cable - Mini USB 1 meter white		10	0,88 €
			50	0,81 €
			100	0,77 €
	Cable 2464 24AWG VW. For low voltage chargers with USB socket Length (mm): 1000 Colour: White			
				









LED TECHNOLOGY > Led modules > Battery Led Modules

Subfamily **LED modules to battery**

Picture	Article	Description	Lot	Price/Unit
	G5K0021UC		1	1,42 €
	1 meter white USB-USB TypeC cable		10	1,29 €
	2464 24AWG VW Cable. For low voltage chargers with USB socket		50	1,17 €
			100	1,12 €
	Length (mm): 1000 Colour: White			
				
	G5K0021UCC		1	1,42 €
	1 meter white USB type C cable - USB type C		10	1,29 €
	2464 24AWG VW Cable. For low voltage chargers with USB-C socket		50	1,17 €
			100	1,12 €
	Length (mm): 1000 Colour: White			
				
	G5K0022UC		1	1,82 €
	2 meter white USB type C cable - USB type C		10	1,65 €
	2464 24AWG VW cable. For low voltage chargers with USB socket		50	1,51 €
			100	1,43 €
	Length (mm): 2000 Colour: White			
				

LED TECHNOLOGY > Led modules > Battery Led Modules

Subfamily **LED modules to battery**

Picture	Article	Description	Lot	Price/Unit
	G5K0040C		1	5,25 €
	EUR Charger 12V-1A with 1m USB-mini USB Cable		10	4,77 €
	USB / MiCRO USB socket with 1 m cable		50	4,34 €
			100	4,13 €
	Colour: White Voltage In (Vac): 100~240 Voltage Out (Vdc): 12 Frecuency (Hz): 50~60 Power (W): 12 Ingress Protection: IP20			
  				
	G5K0041C		1	5,25 €
	USA Charger 12V-1A with USB socket wihtout cable		10	4,77 €
	Colour: White Voltage In (Vac): 100~240		50	4,34 €
	Voltage Out (Vdc): 12 Intensidad Out (A): 1		100	4,13 €
  				







Catalogue **LED TECHNOLOGY**

Line **Led modules**

FAMILY **Battery Led Modules**

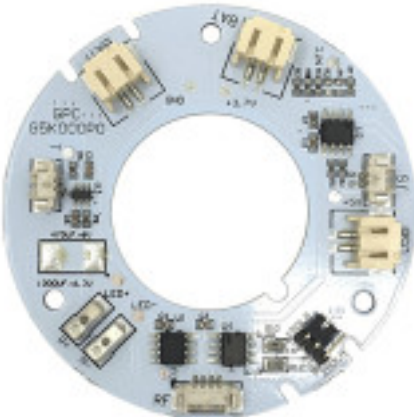




Subfamily **Configurable Led battery modules**






Download the technical data sheet of the module and its components [here.](#)

Picture	Article	Description	Lot	Price/Unit
	G5K000P0		1	11,84 €
	Crown control board module led to battery GPC		10	10,78 €
	Jumper that allows you to choose 150lm or 250lm.		40	9,78 €
	Connectors with 1 or 2 batteries, touch and micro USB. The compatible battery is G5K000P1 and must be connected after the touch control		80	9,32 €
	Diameter (mm): 65 Ingress Protection: IP20 Dimmable: SI			
	 			
	G5K000P02		1	11,84 €
	Mini control board D40 module led to battery GPC02		10	10,78 €
	Jumper that allows you to choose 150lm or 250lm.		50	9,79 €
	Connectors with 1 or 2 batteries, touch and micro USB. The compatible battery is G5K000P1 and must be connected after the touch control		150	9,32 €
	High (mm): 10 Diameter (mm): 40 Ingress Protection: IP20 Dimmable: SI			
	 			

LED TECHNOLOGY > Led modules > Battery Led Modules





Subfamily **Configurable Led battery modules**

Picture	Article	Description	Lot	Price/Unit
	G5K000P3		1	11,84 €
	Rectangular control board module led to battery GPC		10	10,78 €
	Jumper that allows you to choose 150lm or 250lm. Connectors to 1 or 2 batteries, touch and micro USB. Note: The compatible battery is G5K000P1 and must be connected after touch control.		50	9,79 €
			200	9,32 €
		Length (mm): 37 Width (mm): 25,1 High (mm): 10,3 Ingress Protection: IP20 Dimmable: SI		
		   		

	G5K000P1		1	8,42 €
	Battery 805050 with 10cm AWG22 cable and connector		10	7,67 €
			50	6,98 €
			100	6,64 €
		With AWG22 cable and connector. Battery compatible with the G5K000P0 and G5K000P02 modules. The battery must be connected after connecting the touch control. "		
		Length (mm): 50 Width (mm): 50 High (mm): 8 Voltage In (Vdc): 3.7 Ingress Protection: IP20		
		   		



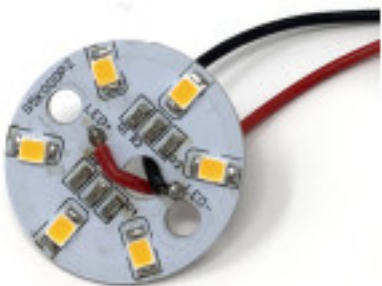

LED TECHNOLOGY > Led modules > Battery Led Modules

Subfamily **Configurable Led battery modules**

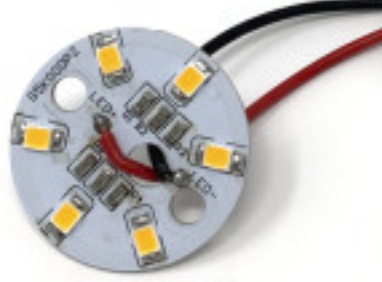Picture	Article	Description	Lot	Price/Unit
	G5K000P1C		1	6,45 €
	Cylindrical battery Li-Ion 18650 2600mAh 10cm		10	5,86 €
	AWG22 cable and connecto		50	5,33 €
	With AWG22 cable and connector		100	5,07 €
	Length (mm): 65 Diameter (mm): 18 Voltage In (Vdc): 3.7 Ingress Protection: IP20			
				
	G5K000P2		1	3,50 €
	Module GPC D28mm. 6 led SAMSUNG 3000K CRI90		10	3,16 €
	50cm AWG22		50	2,87 €
	Aluminum plate 28mm diameter. According to selection on the control board 150lm or 250lm.		100	2,76 €
	Diameter (mm): 28 Voltage In (Vdc): 3.7 Colour Temperature (°K): 3000 Lumen/Watt: 120 Energy efficiency: G CRI (?): 90 Ingress Protection: IP20 Dimmable: SI			
				






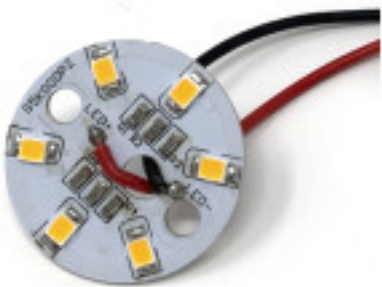



LED TECHNOLOGY > Led modules > Battery Led Modules

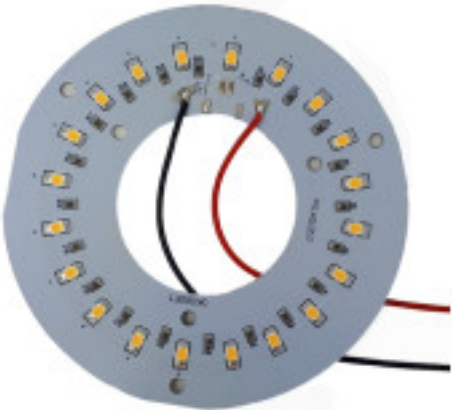Subfamily **Configurable Led battery modules**

Picture	Article	Description	Lot	Price/Unit
	G5K000P2A		1	3,51 €
	Module GPC D28mm. 6 led SAMSUNG 3000K CRI90		10	3,17 €
	25cm AWG22		50	2,89 €
	Aluminum plate 28mm diameter. According to selection on the control board 150lm or 250lm.		200	2,76 €
	Diameter (mm): 28 Voltage In (Vdc): 3.7 Colour Temperature (°K): 3000 Lumen/Watt: 120 Energy efficiency: G CRI (?): 90 Ingress Protection: IP20 Dimmable: SI			
				
	G5K000P2C		1	3,50 €
	Module GPC D28mm. 6 led SAMSUNG 2700K CRI90		10	3,17 €
	50cm AWG22		50	2,89 €
	Aluminum plate 28mm diameter. According to selection on the control board 150lm or 250lm.		100	2,76 €
	Diameter (mm): 28 Voltage In (Vdc): 3.7 Colour Temperature (°K): 2700 Lumen/Watt: 120 Energy efficiency: G CRI (?): 90 Ingress Protection: IP20 Dimmable: SI			
				













LED TECHNOLOGY > Led modules > Battery Led Modules

Subfamily **Configurable Led battery modules**





Picture	Article	Description	Lot	Price/Unit
	G5K000P3		1	10,63 €
	Module Crown GPC D100mm. 20 led Samsung		10	9,67 €
	3000K CRI90 50cm AWG22		50	8,40 €
	Aluminum plate 100mm diameter. According to selection on the control board 170lm or 350 Lm		100	8,01 €
	Diameter (mm): 100 Voltage In (Vdc): 3.7 Colour Temperature (°K): 3000 Lumen/Watt: 120 CRI (?): 90 Ingress Protection: IP20 Dimmable: SI			
	 			
	G5K000P5		1	0,71 €
	Micro-B USB 10cm cable AWG22 and connector		10	0,65 €
	Micro-B USB mounted on white round support 12mm in diameter and 7mm high with 10cm AWG22 cable and connector.		50	0,5875 €
			100	0,5594 €
	High (mm): 7 Diameter (mm): 12			
	 			
	G5K000P5C		1	0,96 €
	USB-C with 10cm cable AWG22 and connector		10	0,87 €
	USB-C mounted on white round support 12mm in diameter and 7mm high with 10cm AWG22 cable and connector.		50	0,79 €
			100	0,75 €
	High (mm): 8,89 Diameter (mm): 12,39			
	 			

LED TECHNOLOGY > Led modules > Battery Led Modules

Subfamily **Configurable Led battery modules**









Picture	Article	Description	Lot	Price/Unit
	G5K000P5C-U		1	1,89 €
	GPC USB-C universal white with 10cm AWG22 cable and 2.0 pin connector.		10	1,69 €
			50	1,53 €
	USB-C mounted on a 12.39mm diameter white round holder with 10cm AWG22 cable and connector.		100	1,43 €
	 			
	G5K000P5CN		1	0,96 €
	GPC USB-C Black with 10cm AWG22 cable and 2.0 pin connector.		10	0,87 €
			50	0,79 €
	USB-C mounted on black round support 12mm in diameter and 7mm high with 10cm AWG22 cable and connector.		100	0,75 €
	 			
	G5K000P6		1	1,73 €
	Micro-B USB with led charging and 10cm cable and connectors		10	1,57 €
			50	1,42 €
	Micro-B USB mounted on board with LED charging indicator. AWG22 cable and connector.		100	1,37 €
	 			

Subfamily **Configurable Led battery modules**

Picture	Article	Description	Lot	Price/Unit
	G5K000X6		1	0,68 €
		Touch with cylinder 10cm cable and micro connector	10	0,61 €
			50	0,56 €
		With cylinder and 10cm of cable and micro-connector. ON / OFF and Dimmer function. No memory. The touch control must be connected before the battery.	100	0,53 €
		High (mm): 9 Diameter (mm): 4		
	 			
	G5K000X7		1	0,5161 €
		Touch with ring 10cm cable and micro connector	10	0,4692 €
			50	0,4267 €
		With ring and 10cm of cable and micro-connector. ON / OFF and Dimmer function. Without memory . The touch control has to be connected before the battery.	100	0,4061 €
		Diameter (mm): 6		
	 			
	G5K000X7L		1	0,4904 €
		Touch with ring 16cm cable and micro connector	50	0,4220 €
			100	0,4056 €
		With ring and 16cm of cable and micro-connector. ON / OFF and Dimmer function. Without memory . The touch control has to be connected before the battery.		
		Diameter (mm): 6		
	 			


LED TECHNOLOGY > Led modules > Battery Led Modules

Subfamily **Configurable Led battery modules**

Picture	Article	Description	Lot	Price/Unit
	G5K0021F		1	7,22 €
	EUR 5V-2A charger with rear USB socket with 1m cable		10	6,55 €
			50	5,95 €
			100	5,67 €
	Colour: White Voltage In (Vac): 100~240 Voltage Out (Vdc): 5 Intensidad In (A): 0.5 Intensidad Out (A): 2 Frecuency (Hz): 50~60			
	 			
	G5K0021FC		1	7,70 €
	EUR 5V-2A charger with rear USB socket with 1m USB-USB-C cable		10	6,99 €
			50	6,36 €
			100	6,06 €
	Colour: White Voltage In (Vac): 100~240 Voltage Out (Vdc): 5 Intensidad In (A): 0.5 Intensidad Out (A): 2 Frecuency (Hz): 50~60			
	 			
	G5K0021U		1	0,98 €
	USB cable - Mini USB 1 meter white		10	0,88 €
			50	0,81 €
			100	0,77 €
	Cable 2464 24AWG VW. For low voltage chargers with USB socket			
	Length (mm): 1000 Colour: White			
				

LED TECHNOLOGY > Led modules > Battery Led Modules

Subfamily **Configurable Led battery modules**

Picture	Article	Description	Lot	Price/Unit
	G5K0021UC		1	1,42 €
		1 meter white USB-USB TypeC cable	10	1,29 €
		2464 24AWG VW Cable. For low voltage chargers with USB socket	50	1,17 €
		Length (mm): 1000 Colour: White	100	1,12 €



Catalogue **LED TECHNOLOGY**

Line **Led modules**


FAMILY **Led Lumens Modules**

Subfamily **EggDrop G-series**

COB modules mains voltage 120V (UL) and 230V (EC) potencias 4 to 40W. CRI 80 and 90. T Color from 2700K to 600K. With automatic connectors .compatible with most existing TRIAC dimmer in the market .Optionally with LED Holder (Zhaga compliant) and Thermal pad connectors to distribute heat over the entire surface..

see manual application [aquí.](#)

see manual product [aquí.](#)

Picture	Article	Description	Lot	Price/Unit
	LUETT57		1	0,72 €
	Thermal Tape for EDC/57C		5	0,60 €
	UNTIL END OF STOCKS. Distributes the heat on the surface of the module. It should measure 6mm more in diameter than the module		50	0,55 €
			100	0,52 €

Diameter (mm): 63




Catalogue **LED TECHNOLOGY**

Line **Led modules**

FAMILY **Led Lumens Modules**

Subfamily **EggDrop F2-series Flicker Free**


COB Modules mains voltage. ECO desing according to ERP directives. Powers from 4 to 20W. Automatic connectors. Dimmable with leading and trailing edge dimmers.

Picture	Article	Description	Lot	Price/Unit
	LUE47049272F2		1	14,87 €
	Led Cob EDC/47C/4W/927/230V/F201		9	12,39 €
		ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers.	90	11,26 €
			180	10,73 €
		High (mm): 7,6 Diameter (mm): 47 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 4 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 316 Angle (°): 120 Energy efficiency: G CRI (≥): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95		



LED TECHNOLOGY > Led modules > Led Lumens Modules


Subfamily **EggDrop F2-series Flicker Free**

Picture	Article	Description	Lot	Price/Unit
	LUE47049302F2		1	14,87 €
	Led Cob EDC / 47C / 4W / 930 / 230V / F201		9	12,39 €
			90	11,26 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers.		180	10,73 €
	High (mm): 7,6 Diameter (mm): 47 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 4 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 344 Angle (°): 120 Energy efficiency: G CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95			




LED TECHNOLOGY > Led modules > Led Lumens Modules

Subfamily **EggDrop F2-series Flicker Free**

Picture	Article	Description	Lot	Price/Unit
	LUE47069272F2		1	14,98 €
	Led Cob EDC / 47C / 6W / 927 / 230V / F201		9	12,48 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers.		90	11,35 €
			180	10,80 €
	High (mm): 7,6 Diameter (mm): 47 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 6 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 475 Angle (°): 120 Energy efficiency: G CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			




	LUE47069302F2		1	14,98 €
	Led Cob EDC / 47C / 6W / 930 / 230V / F201		9	12,48 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers.		90	11,35 €
			180	10,80 €
	High (mm): 7,6 Diameter (mm): 47 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 6 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 516 Angle (°): 120 Energy efficiency: G CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			




LED TECHNOLOGY > Led modules > Led Lumens Modules

Subfamily **EggDrop F2-series Flicker Free**

Picture	Article	Description	Lot	Price/Unit
	LUE47069402F2		1	14,98 €
	Led Cob EDC / 47C / 6W / 940 / 230V / F201		9	12,48 €
			90	11,35 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		180	10,80 €
	High (mm): 7,6 Diameter (mm): 47 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 6 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen: 537 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			




	LUE47089272F2		1	15,07 €
	Led Cob EDC / 47C / 8W / 927 / 230V / F201		9	12,56 €
			90	11,41 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		180	10,87 €
	High (mm): 7,6 Diameter (mm): 47 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 8 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 665 Angle (°): 120 Energy efficiency: G CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			




LED TECHNOLOGY > Led modules > Led Lumens Modules

Subfamily **EggDrop F2-series Flicker Free**


Picture	Article	Description	Lot	Price/Unit
	LUE47089302F2		1	15,07 €
	Led Cob EDC / 47C / 8W / 930 / 230V / F201		9	12,56 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		90	11,41 €
			180	10,87 €
	High (mm): 7,6 Diameter (mm): 47 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 8 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 722 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			




	LUE47109272F2		1	15,20 €
	Led Cob EDC / 47C / 10W / 927 / 230V / F201		9	12,66 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers.		90	11,51 €
			180	10,96 €
	High (mm): 7,6 Diameter (mm): 47 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 10 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 831 Angle (°): 120 Energy efficiency: G CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			



Subfamily **EggDrop F2-series Flicker Free**


Picture	Article	Description	Lot	Price/Unit
	LUE47109302F2		1	15,20 €
	Led Cob EDC / 47C / 10W / 930 / 230V / F201		9	12,66 €
			90	11,51 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		180	10,96 €
	High (mm): 7,6 Diameter (mm): 47 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 10 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 903 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			




	LUE47109402F2		1	15,20 €
	Led Cob EDC / 47C / 10W / 940 / 230V / F201		9	12,66 €
			90	11,51 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		180	10,96 €
	High (mm): 7,6 Diameter (mm): 47 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 10 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen: 939 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			



Subfamily **EggDrop F2-series Flicker Free**


Picture	Article	Description	Lot	Price/Unit
	LUE57089272F2		1	15,44 €
	Led Cob EDC / 57C / 8W / 927 / 230V / F201		5	12,87 €
			50	11,70 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		100	11,14 €
	High (mm): 7,6 Diameter (mm): 57 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 8 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 696 Angle (°): 120 Energy efficiency: G CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			




	LUE57089302F2		1	15,44 €
	Led Cob EDC / 57C / 8W / 930 / 230V / F201		5	12,87 €
			50	11,70 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		100	11,14 €
	High (mm): 7,6 Diameter (mm): 57 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 8 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 757 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			



Subfamily **EggDrop F2-series Flicker Free**


Picture	Article	Description	Lot	Price/Unit
	LUE57109272F2		1	15,56 €
	Led Cob EDC / 57C / 10W / 927 / 230V / F201		5	12,97 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		50	11,79 €
			100	11,23 €
	High (mm): 7,6 Diameter (mm): 57 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 10 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 870 Angle (°): 120 Energy efficiency: G CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			




	LUE57109302F2		1	15,56 €
	Led Cob EDC / 57C / 10W / 930 / 230V / F201		5	12,97 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		50	11,79 €
			100	11,23 €
	High (mm): 7,6 Diameter (mm): 57 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 10 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 946 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			



Subfamily **EggDrop F2-series Flicker Free**


Picture	Article	Description	Lot	Price/Unit
	LUE57129272F2		1	15,68 €
	Led Cob EDC / 57C / 12W / 927 / 230V / F201		5	13,07 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		50	11,88 €
			100	11,31 €
	High (mm): 7,6 Diameter (mm): 57 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 12 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 997 Angle (°): 120 Energy efficiency: G CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			




	LUE57129302F2		1	15,68 €
	Led Cob EDC / 57C / 12W / 930 / 230V / F201		5	13,07 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		50	11,88 €
			100	11,31 €
	High (mm): 7,6 Diameter (mm): 57 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 12 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 1084 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			



Subfamily **EggDrop F2-series Flicker Free**


Picture	Article	Description	Lot	Price/Unit
	LUE57129402F2		1	15,68 €
	Led Cob EDC / 57C / 12W / 940 / 230V / F201		5	13,07 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		50	11,88 €
			100	11,31 €
	High (mm): 7,6 Diameter (mm): 57 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 12 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen: 1127 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			




	LUE57159272F2		1	15,83 €
	Led Cob EDC / 57C / 15W / 927 / 230V / F201		5	13,20 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		50	12,00 €
			100	11,43 €
	High (mm): 7,6 Diameter (mm): 57 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 15 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 1246 Angle (°): 120 Energy efficiency: G CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			



Subfamily **EggDrop F2-series Flicker Free**

Picture	Article	Description	Lot	Price/Unit
	LUE57159302F2		1	15,83 €
	Led Cob EDC / 57C / 15W / 930 / 230V / F201		5	13,20 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		50	12,00 €
			100	11,43 €
	High (mm): 7,6 Diameter (mm): 57 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 15 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 1355 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			




	LUE57159402F2		1	15,83 €
	Led Cob EDC / 57C / 15W / 940 / 230V / F201		5	13,20 €
	ECO design according to ERP directives.. Automatic connectors. Dimmables by leading and trailing edge dimmers. Zhaga standard		50	12,00 €
			100	11,43 €
	High (mm): 7,6 Diameter (mm): 57 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 15 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen: 1409 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0,95			




LED TECHNOLOGY > Led modules > Led Lumens Modules

Subfamily **EggDrop F2-series Flicker Free**

Picture	Article	Description	Lot	Price/Unit
	LUEHL47F2		1	1,01 €
		Holder D47 for EDC/47C F201 white	5	0,85 €
		Holder for EggDrop modules direct to the network of 47 mm in diameter series F201	50	0,77 €
			100	0,73 €
		High (mm): 8,4 Diameter (mm): 47 Colour: White		









	LUEHL57F2		1	1,07 €
		Holder D60 for EDG/57C F201 white	5	0,88 €
		Zhaga standard. 5.5mm diameter fixing holes 35mm apart between centers.	50	0,81 €
			100	0,77 €
		High (mm): 9 Diameter (mm): 60 Colour: White		



LED TECHNOLOGY > Led modules > Led Lumens Modules

Subfamily **EggDrop F2-series Flicker Free**

Picture	Article	Description	Lot	Price/Unit
	LUETT47F2		1	0,72 €
	Thermal Tape for EDC/47C F201		5	0,60 €
	Distributes the heat on the surface of the module. It should measure 6mm more in diameter than the module		50	0,55 €
	Diameter (mm): 53		100	0,52 €
	 			

	LUETT57		1	0,72 €
	Thermal Tape for EDC/57C		5	0,60 €
	UNTIL END OF STOCKS. Distributes the heat on the surface of the module. It should measure 6mm more in diameter than the module		50	0,55 €
	Diameter (mm): 63		100	0,52 €
				


Catalogue **LED TECHNOLOGY**

Line **Led modules**

FAMILY **Led Lumens Modules**















Subfamily **EggDrop F3-series Flicker Free**

COB Modules mains voltage. ECO desing according to ERP directives. Diameter 38mm. Powers 4, 6, 8W.
Automatic connectors. Dimmable with leading and trailing edge dimmers.


Picture	Article	Description	Lot	Price/Unit
	LUE38049272F3		1	15,11 €
	Led Cob EDC/38C/4W/927/230V/F302		10	12,58 €
	ECO design according to ERP directives. Automatic connectors. Dimmable by cutting start or end of phase.		80	11,44 €
			160	10,89 €
	High (mm): 7,15 Diameter (mm): 38 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 4 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 365 Angle (°): 120 Energy efficiency: F CRI (≥): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95			




Subfamily **EggDrop F3-series Flicker Free**

Picture	Article	Description	Lot	Price/Unit
	LUE38049302F3	Led Cob EDC/38C/4W/930/230V/F302	1	15,11 €
			10	12,58 €
			80	11,44 €
		ECO design according to ERP directives. Automatic connectors. Dimmable by cutting start or end of phase.	160	10,89 €
		High (mm): 7,15 Diameter (mm): 38 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 4 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 370 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95		
     				
	LUE38049402F3	Led Cob EDC/38C/4W/940/230V/F302	1	15,11 €
			10	12,58 €
			80	11,44 €
		ECO design according to ERP directives. Automatic connectors. Dimmable by cutting start or end of phase.	160	10,89 €
		High (mm): 7,15 Diameter (mm): 38 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 4 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen: 395 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95		
     				

Subfamily **EggDrop F3-series Flicker Free**




Picture	Article	Description	Lot	Price/Unit
	LUE38069272F3		1	15,28 €
	Led Cob EDC/38C/6W/927/230V/F302		10	12,73 €
			100	11,57 €
	ECO design according to ERP directives. Automatic connectors. Dimmable by cutting start or end of phase.		200	11,02 €
	High (mm): 7,15 Diameter (mm): 38 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 6 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 560 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95			

















	LUE38069302F3		1	15,28 €
	Led Cob EDC/38C/6W/930/230V/F302		10	12,73 €
			80	11,57 €
	ECO design according to ERP directives. Automatic connectors. Dimmable by cutting start or end of phase.		160	11,02 €
	High (mm): 7,15 Diameter (mm): 38 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 6 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 570 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95			



Subfamily **EggDrop F3-series Flicker Free**


Picture	Article	Description	Lot	Price/Unit
	LUE38069402F3	Led Cob EDC/38C/6W/940/230V/F302	1	15,28 €
			10	12,73 €
			80	11,57 €
		ECO design according to ERP directives. Automatic connectors. Dimmable by cutting start or end of phase.	160	11,02 €
		High (mm): 7,15 Diameter (mm): 38 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 6 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen: 595 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95		
     				
	LUE38089272F3	Led Cob EDC/38C/8W/927/230V/F302	1	15,42 €
			10	12,84 €
			80	11,67 €
		ECO design according to ERP directives. Automatic connectors. Dimmable by cutting start or end of phase.	160	11,12 €
		High (mm): 7,15 Diameter (mm): 38 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 8 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 745 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95		
     				

Subfamily **EggDrop F3-series Flicker Free**


Picture	Article	Description	Lot	Price/Unit
	LUE38089302F3	Led Cob EDC/38C/8W/930/230V/F302	1	15,42 €
			10	12,84 €
			80	11,67 €
		ECO design according to ERP directives. Automatic connectors. Dimmable by cutting start or end of phase.	160	11,12 €
		High (mm): 7,15 Diameter (mm): 38 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 8 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 760 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95		
     				
	LUE38089402F3	Led Cob EDC/38C/8W/940/230V/F302	1	15,42 €
			10	12,84 €
			80	11,67 €
		ECO design according to ERP directives. Automatic connectors. Dimmable by cutting start or end of phase.	160	11,12 €
		High (mm): 7,15 Diameter (mm): 38 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 8 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Critical Temperature (°C): 85 Colour Temperature (°K): 4000 Lumen: 790 Angle (°): 120 Energy efficiency: F CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95		
     				

LED TECHNOLOGY > Led modules > Led Lumens Modules

Subfamily **EggDrop F3-series Flicker Free**

Picture	Article	Description	Lot	Price/Unit
	LUEHL38F3		1	1,07 €
	Holder for EDC/38C F302		5	0,88 €
			50	0,81 €
	High (mm): 8,3 Diameter (mm): 40,7		100	0,77 €



	LUETT38F3		1	0,69 €
	Thermal Tape for EDC/38C F302		50	0,57 €
	Distributes the heat on the surface of the module. It must measure 6mm more in diameter than the module		100	0,52 €
	Diameter (mm): 44 Colour: Black		200	0,49 €




Catalogue **LED TECHNOLOGY**

Line **Led modules**

FAMILY **Led Lumens Modules**

Subfamily **Downlight Module Series F**



Led module 100mm Diameter. ECO desing according to ERP directives

Picture	Article	Description	Lot	Price/Unit
	LUD100169272		1	16,95 €
	Led Module DLM100C/16W/927/230V/ F201		12	15,41 €
	ECO design according to ERP directives. Automatic connectors. Dimmables by leading or trailing edge dimmers. No cover. Cover code LUD100CV to be ordered separately		120	14,01 €
			240	13,34 €
	Diameter (mm): 100 Voltage In (Vac): 230 Intensidad In (A): 0.063 Frecuency (Hz): 50~60 Power (W): 16 Temperature (°C): -40~+85 Room Temperature (°C): -40~+85 Colour Temperature (°K): 2700 Lumen: 1520 Angle (°): 120 CRI (≥): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95			




LED TECHNOLOGY > Led modules > Led Lumens Modules

Subfamily **Downlight Module Series F**


Picture	Article	Description	Lot	Price/Unit
	LUD100169302		1	16,95 €
	Led Module DLM100C/16W/930/230V/ F201		12	15,41 €
	ECO design according to ERP directives. Automatic connectors. Dimmables by leading or trailing edge dimmers. No cover. Cover code LUD100CV to be ordered separately		120	14,01 €
			240	13,34 €
	Diameter (mm): 100 Voltage In (Vac): 230 Intensidad In (A): 0.063 Frecuency (Hz): 50~60 Power (W): 16 Temperature (°C): -40+85 Room Temperature (°C): -40~+85 Colour Temperature (°K): 3000 Lumen: 1616 Angle (°): 120 CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.95			
	LUD100CV		1	1,51 €
	DLM100C F201 Led Module Cover		12	1,26 €
	Transparent plastic cover for DLM 100C F201		120	1,20 €
			240	1,16 €
	Diameter (mm): 100 Colour: Transparent			



Catalogue **LED TECHNOLOGY**
 Line **Led modules**
 FAmily **Modules Led VEGAH 220v**
 Subfamily **Module LED VEGAH circular directly to network**






Picture	Article	Description	Lot	Price/Unit
	18GR72103294B		1	21,45 €
	Circular module d70 72led 10W 230V 2700K CRI90 with 40cm FEP		10	19,50 €
			50	18,94 €
			100	18,59 €
	Energy Class E			
	Diameter (mm): 70 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 10 Room Temperature (°C): -40~+65 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 1200 Angle (°): 130 CRI (≥): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: 0.98 Colour consistency: SDCM 3			








	18GR72103394B		1	21,45 €
	Circular module d70 72led 10W 230V 3000K CRI90 with 40cm FEP		10	19,50 €
			50	18,94 €
			100	18,59 €
	Energy Class E			
	Diameter (mm): 70 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 10 Room Temperature (°C): -40~+65 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 1200 Angle (°): 130 Energy efficiency: E CRI (≥): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: 0.98 Colour consistency: 3			




Subfamily **Module LED VEGAH circular directly to network**

Picture	Article	Description	Lot	Price/Unit
	18GR72143294B		1	21,45 €
		Circular module d70 72led 14W 230V 2700K CRI90 with 40cm FEP	10	19,50 €
			50	18,94 €
		Energy Class E	100	18,59 €
		Diameter (mm): 70 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 14 Room Temperature (°C): -40~+65 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Lumen: 1680 Angle (°): 130 Energy efficiency: E CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: 0.98 Colour consistency: SDCM 3		
				
  				


	18GR72143394B		1	21,45 €
		Circular module d70 72led 14W 230V 3000K CRI90 with 40cm FEP	10	19,50 €
			50	18,94 €
		Energy Class E	100	18,59 €
		Diameter (mm): 70 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 14 Room Temperature (°C): -40~+65 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 1680 Angle (°): 130 Energy efficiency: E CRI (?): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: 0.98 Colour consistency: 3		
				
  				


Catalogue **LED TECHNOLOGY**
 Line **Led modules**
 FAmily **Modules Led VEGAH 220v**
 Subfamily **LED module VEGAH lineal directly to the network**

Picture	Article	Description	Lot	Price/Unit
	18GS302033MB		1	33,19 €
		Linear module 420x30 mm 30led 20W 230V 3000K with connectors	20	30,17 €
			100	28,73 €
		ECO design ERP. SVM 0.4 and Pst LM 0.9. Energy Class E		
		Length (mm): 420 Width (mm): 30 High (mm): 15,5 Voltage In (Vac): 230 Frecuency (Hz): 50~60 Power (W): 20 Room Temperature (°C): -40~+65 Critical Temperature (°C): 85 Colour Temperature (°K): 3000 Lumen: 2300 Angle (°): 130 CRI (≥): 90 Life (Hours): 50000 Dimmable: Corte inicio o fin de fase Power factor: >0.98 Colour consistency: SDCM 3		



Catalogue **LED TECHNOLOGY**
 Line **Led modules**
 Family **Heat sink COB modules**
 Subfamily **heatsinks for Lumens modules**

Picture	Article	Description	Lot	Price/Unit
	G500001		1	51,48 €
	200 gram conductive silicone tube		5	42,90 €
	To improve contact and heat transfer between moodulo and heatsink. Thermal conduction 0.45W / mK		10	35,75 €

	G5CM7050		75 (Pedido mínimo)	9,30 €
	Heatsink 7050 70x50mm Silver			
	For modules LUMENS Series EggDrop EDC47C 10W High (mm): 50 Diameter (mm): 70 Colour: Silver			




LED TECHNOLOGY > Led modules > Heat sink COB modules

Subfamily **heatsinks for Lumens modules**

Picture	Article	Description	Lot	Price/Unit
	G5CM7080		1	17,72 €
	Heatsink 7080 70x80mm Silver		5	14,77 €
	For modules LUMENS Series EggDrop EDC47C 12 and 15W		10	13,42 €
			50	12,78 €
	High (mm): 80 Diameter (mm): 70 Colour: Silver			
				
	G5CM9950		1	26,52 €
	Heatsink 9950 99x50mm Silver		5	24,10 €
	For modules LUMENS Series EggDrop EDC57C 10 and 15W		10	21,92 €
			50	20,87 €
	High (mm): 50 Diameter (mm): 99 Colour: Silver			
				
	G5CM9980		1	25,65 €
	Heatsink 9980 99x80mm Silver		5	23,32 €
	For modules LUMENS Series EggDrop EDC57C 20,30 and 40W		10	21,22 €
			50	20,16 €
	High (mm): 80 Diameter (mm): 99 Colour: Silver			
				


Catalogue **LED TECHNOLOGY**
 Line **Led modules**
 FAmily **Constant Voltage Led Modules**
 Subfamily **Linear LED modules at constant voltage**

Picture	Article	Description	Lot	Price/Unit
	18RHF7721062SG2		1	8,78 €
	Linear module 288mm 72led 10W 24VDC 2700Kwith connectors		20	8,00 €
			100	7,61 €
	Automatic connection using 4 Molex connectors. Possibility of multiple connection with connection pin reference 18RHF2060. Length (mm): 288 Width (mm): 10 High (mm): 4 Voltage In (Vdc): 24 Power (W): 10 Room Temperature (°C): -40~+55 Critical Temperature (°C): 85 Colour Temperature (°K): 2700 Connection: Automatic Lumen: 2000 Angle (°): 130 Energy efficiency: C Incandescence equivalence (W): 200 CRI (≥): 80 Life (Hours): 50000 Dimmable: SI Colour consistency: 3			



LED TECHNOLOGY > Led modules > Constant Voltage Led Modules


Subfamily **Linear LED modules at constant voltage**

Picture	Article	Description	Lot	Price/Unit
	18RHF7721063SG2		1	8,78 €
	Linear module 288mm 72led 10W 24VDC 3000K with connectors		20	8,00 €
			100	7,61 €

Automatic connection using 4 Molex connectors.
Possibility of multiple connection with connection pin reference 18RHF2060.

Length (mm): 288 Width (mm): 10 High (mm): 4
Voltage In (Vdc): 24 Power (W): 10
Room Temperature (°C): -40~+55
Critical Temperature (°C): 85
Colour Temperature (°K): 3000 Connection: Automatic
Lumen: 2000 Angle (°): 130 Energy efficiency: C
Incandescence equivalence (W): 200 CRI (?): 80
Life (Hours): 50000 Dimmable: SI
Colour consistency: 3



	18RHF2060		1	0,68 €
	Connection pin for linear module 288mm 72led		20	0,61 €
			100	0,59 €

