



Catalogue **LED TECHNOLOGY**  
 Line **Electronic Led Power Supplies**  
 Family **LED Power Supplies Constant Current**  
 Subfamily **Electronic Led power dimmable constant current**


Picture	Article	Description	Lot	Price/Unit
	G503504A3		1	12,09 €
	Dimmable Led Power Supply Mini 350mA 4W		5	10,08 €
	ECO Design ERP. IP20. 350mA constant current output. Dimmable by leading or trailing edge dimmers.		10	9,17 €
			50	8,71 €
	Length (mm): 48 Width (mm): 30 High (mm): 20 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 6~12 Intensidad In (A): 0.03 Intensidad Out (A): 0.35 Frecuency (Hz): 50~60 Power (W): 2~4 Room Temperature (°C): -20~+60 Critical Temperature (°C): 85 Life (Hours): 50000 Ingress Protection: IP65 Dimmable: Corte inicio o fin de fase Power factor: 0.90			



Subfamily **Electronic Led power dimmable constant current**


Picture	Article	Description	Lot	Price/Unit
	G503504B2		1	8,40 €
	Dimmable CC Led Power Supply Mini-4-500T 500mA		5	7,63 €
	4W IP65		10	6,94 €
	ECO ERP Design. IP65. Constant current output 500mA. Adjustable cut start or end of phase		50	6,49 €
	Length (mm): 48 Width (mm): 30 High (mm): 20 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 4~8 Intensidad Out (A): 0.5 Frecuency (Hz): 50~60 Power (W): 2~4 Room Temperature (°C): -20~+60 Critical Temperature (°C): 85 Life (Hours): 50000 Ingress Protection: IP65 Dimmable: Corte inicio o fin de fase Power factor: 0.90			




	G503704		1	12,09 €
	Dimmable DC Mini-4-700T 700mA 4W IP65 Led Power Supply		5	10,08 €
	ECO ERP Design. IP65. Constant current output 700mA. Adjustable cut start or end of phase		10	9,17 €
	Length (mm): 48 Width (mm): 30 High (mm): 20 Colour: White Voltage In (V): 220~240 Voltage Out (Vdc): 2.5~6 Intensidad Out (A): 0.7 Frecuency (Hz): 50~60 Power (W): 2~4 Room Temperature (°C): -20~+60 Critical Temperature (°C): 85 Life (Hours): 50000 Ingress Protection: IP65 Dimmable: Corte inicio o fin de fase Power factor: 0.90		50	8,71 €



Subfamily **Electronic Led power dimmable constant current**

Picture	Article	Description	Lot	Price/Unit
	G503506C2		1	12,65 €
	Dimmable Led Power Supply Mini 350mA 6W		5	10,54 €
	ECO ERP Design. IP65. Constant current output 350mA. Adjustable cut start or end of phase		10	9,59 €
			50	8,97 €
	Length (mm): 48 Width (mm): 30 High (mm): 20 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 9~17 Intensidad Out (A): 0.35 Frecuency (Hz): 50~60 Power (W): 0~6 Room Temperature (°C): -20~+60 Critical Temperature (°C): 85 Ingress Protection: IP65 Dimmable: Corte inicio o fin de fase Power factor: 0.90			




	G503606C		1	9,20 €
	Dimmable DC Led Power Supply Mini-6-500T 500mA 6W IP65		5	8,37 €
	ECO ERP Design. IP65. Constant current output 500mA. Adjustable cut start or end of phase		10	7,61 €
			50	7,11 €
	Length (mm): 48 Width (mm): 30 High (mm): 20 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 6~12 Intensidad Out (A): 0.5 Frecuency (Hz): 50~60 Power (W): 3~6 Room Temperature (°C): -20~+60 Critical Temperature (°C): 90 Life (Hours): 50000 Ingress Protection: IP65 Dimmable: Corte inicio o fin de fase Power factor: 0.90			




LED TECHNOLOGY > Electronic Led Power Supplies > LED Power Supplies Constant Current

Subfamily **Electronic Led power dimmable constant current**


Picture	Article	Description	Lot	Price/Unit
	G503706K		1	9,20 €
	Dimmable DC Led Power Supply Mini-6-700T 700mA		5	8,37 €
	6W IP65		10	7,61 €
	ECO ERP Design. IP65. Constant current output 700mA. Adjustable cut start or end of phase		50	7,11 €
	Length (mm): 48 Width (mm): 30 High (mm): 20 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 4~9 Intensidad Out (A): 0.7 Frecuency (Hz): 50~60 Power (W): 3~6 Room Temperature (°C): -20~+60 Critical Temperature (°C): 85 Life (Hours): 50000 Ingress Protection: IP65 Dimmable: Corte inicio o fin de fase Power factor: 0.90			



	G503510B2		1	13,17 €
	Dimmable Led Power Supply Mini 350mA 10W		5	10,97 €
	ECO ERP Design. IP65. Constant current output 350mA. Adjustable cut start or end of phase		10	9,97 €
	Length (mm): 58 Width (mm): 36 High (mm): 20 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 14~29 Intensidad Out (A): 0.35 Frecuency (Hz): 50~60 Power (W): 5~10 Room Temperature (°C): -20~+60 Critical Temperature (°C): 90 Ingress Protection: IP65 Dimmable: Corte inicio o fin de fase Power factor: 0.9		50	9,32 €



Subfamily **Electronic Led power dimmable constant current**

Picture	Article	Description	Lot	Price/Unit
	G503510F		1	9,54 €
	Dimmable DC Led Power Supply Mini-10-500T		5	8,67 €
	500mA 10W IP65		10	7,88 €
	ECO ERP Design. IP65. Constant current output 500mA. Adjustable cut start or end of phase		50	7,36 €
	Length (mm): 58 Width (mm): 36 High (mm): 20 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 10~20 Intensidad Out (A): 0.5 Frecuency (Hz): 50~60 Power (W): 5~10 Room Temperature (°C): -20~+60 Critical Temperature (°C): 90 Life (Hours): 50000 Ingress Protection: IP65 Dimmable: Corte inicio o fin de fase Power factor: 0.90			




	G503710C		1	9,54 €
	Dimmable DC Led Power Supply Mini-10-700T		5	8,67 €
	700mA 10W IP65		10	7,88 €
	ECO ERP Design. IP65. Constant current output 700mA. Adjustable cut start or end of phase		50	7,36 €
	Length (mm): 58 Width (mm): 36 High (mm): 20 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 7~15 Intensidad Out (A): 0.7 Frecuency (Hz): 50~60 Power (W): 5~10 Room Temperature (°C): -20~+60 Critical Temperature (°C): 90 Life (Hours): 50000 Ingress Protection: IP65 Dimmable: Corte inicio o fin de fase Power factor: 0.90			




LED TECHNOLOGY > Electronic Led Power Supplies > LED Power Supplies Constant Current

Subfamily **Electronic Led power dimmable constant current**


Picture	Article	Description	Lot	Price/Unit
	G503612A		1	24,01 €
	Multicurrent Dimmabl Led power supply DALI DT8 CC		5	21,83 €
	IEM-12D TW 500mA 12W		10	19,84 €
			100	18,54 €
	ECO ERP Design. Dimmable DALI DT8. Output current selectable by DIP-SWITCH from 150mA to 500mA			
	Length (mm): 119 Width (mm): 52 High (mm): 22,5 Colour: White Voltage In (Vac): 220~240 Intensidad Out (A): 0.15~0.5 Frecuency (Hz): 50~60 Power (W): 7.5~12 Room Temperature (°C): -20~+45 Critical Temperature (°C): 85 Ingress Protection: IP20 Dimmable: DALI Power factor: 0.95			



	G503612B		1	83,82 €
	Multicurrent dimmabl Casambi Led power supply CC		5	76,20 €
	IEM-12BC TW 500mA 12W		10	69,28 €
			20	64,75 €
	Dimmable CASAMBI bluetooth. Output current selectable by DIP-SWITCH from 150mA to 500mA			
	Length (mm): 119 Width (mm): 52 High (mm): 22,5 Colour: White Voltage In (Vac): 220~240 Intensidad Out (A): 0.15~0.5 Frecuency (Hz): 50~60 Power (W): 7.5~12 Room Temperature (°C): -20~+45 Critical Temperature (°C): 85 Ingress Protection: IP20 Power factor: 0.95			



Subfamily **Electronic Led power dimmable constant current**


Picture	Article	Description	Lot	Price/Unit
	G503712B		1	21,05 €
	Power supply Led multicourant variable DALI DC		5	19,14 €
	MIM-12D 700mA 12W		10	17,39 €
	ECO ERP Design. Constant multi-current output from 100mA to 700mA. Dimmable DALI and PUSH		50	16,25 €
	Length (mm): 65 Width (mm): 43 High (mm): 24 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vac): 2~42 Intensidad Out (A): 0.1~0.7 Frecuency (Hz): 50~60 Power (W): 4.2~12.6 Room Temperature (°C): -20~+60 Critical Temperature (°C): 90 Life (Hours): 50000 Ingress Protection: IP20 Dimmable: Push&DALI Power factor: 0.95			




	G503812D		1	25,70 €
	Dimmable Led driver DALI CC IE-12D multi current 12W		5	23,37 €
			10	21,26 €
	ECO Design ERP Compliant. Constant multi-current output from 180mA to 500mA.		50	19,88 €
	Length (mm): 119 Width (mm): 52 High (mm): 22,5 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 15~52 Intensidad In (A): 0.08 Intensidad Out (A): 0.23~0.5 Frecuency (Hz): 50~60 Power (W): 4~12 Room Temperature (°C): -20~+50 Critical Temperature (°C): 80 Life (Hours): 50000 Ingress Protection: IP20 Dimmable: DALI Power factor: 0.95			



Subfamily **Electronic Led power dimmable constant current**

Picture	Article	Description	Lot	Price/Unit
	G503812E		1	27,82 €
	Dimmable Led driver DALI CC LIM-12D multcurrent		5	25,29 €
	12W		10	23,00 €
			50	21,49 €
	ECO Design ERP Compliant. Constant multi-current output from 150mA to 700mA. Dimmable DALI and with Switch Dim			
	Length (mm): 132 Width (mm): 30 High (mm): 20 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vac): 2~40 Intensidad In (A): 0.08 Intensidad Out (A): 0.3~0.7 Frecuency (Hz): 50~60 Power (W): 6.3~12 Room Temperature (°C): -20~+45 Critical Temperature (°C): 90 Life (Hours): 50000 Ingress Protection: IP20 Dimmable: DALI Power factor: 0.95			




	G503515		1	15,96 €
	LED Power Supply dimmable SLD15-300IL-Es		5	13,31 €
	300mA 14,4W		10	12,09 €
			80	11,31 €
	ECO Design ERP Compliant. Dimmable with leading or trailing edge dimmers. Constant current output 300mA.			
	Length (mm): 85,3 Width (mm): 41 High (mm): 22 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 24~48 Intensidad Out (A): 0.3 Frecuency (Hz): 50~60 Power (W): 7.2~14.4 Room Temperature (°C): -25~+50 Critical Temperature (°C): 85 Ingress Protection: IP20 Dimmable: Corte inicio o fin de fase Power factor: 0.95			






Subfamily **Electronic Led power dimmable constant current**

Picture	Article	Description	Lot	Price/Unit
	G503515B		1	15,96 €
	LED Power Supply dimmable SLD15-350IL-Es		5	13,31 €
	350mA 14,7W		10	12,09 €
			80	11,31 €

ECO Design ERP Compliant. Adjustable 10-100% with regulators cutting start or end of phase. Constant current output 350mA. Independant use.

Length (mm): 85,3 Width (mm): 41 High (mm): 22  
 Colour: White Voltage In (Vac): 220~240  
 Voltage Out (Vdc): 24~42 Intensidad Out (A): 0.35  
 Frecuency (Hz): 50~60 Power (W): 8.4~14.7  
 Room Temperature (°C): -25~+50  
 Critical Temperature (°C): 85 Ingress Protection: IP20  
 Dimmable: Corte inicio o fin de fase  
 Power factor: 0.95




	G503515D		1	15,96 €
	LED Power Supply dimmable SLD15-500IL-Es		5	13,31 €
	500mA 15W		10	12,09 €
			80	11,31 €

ECO Design ERP Compliant. Adjustable 10-100% with regulators cutting start or end of phase. Constant current output 500mA. Independant use.

Length (mm): 85,3 Width (mm): 41 High (mm): 22  
 Colour: White Voltage In (Vac): 220~240  
 Voltage Out (Vdc): 17~30 Intensidad Out (A): 0.5  
 Frecuency (Hz): 50~60 Power (W): 8.5~15  
 Room Temperature (°C): -25~+50  
 Critical Temperature (°C): 85 Ingress Protection: IP20  
 Dimmable: Corte inicio o fin de fase  
 Power factor: 0.95




Subfamily **Electronic Led power dimmable constant current**

Picture	Article	Description	Lot	Price/Unit
	G503515F		1	15,96 €
	LED Power Supply dimmable SLD15-700IL-Es		5	13,31 €
	700mA 15,4W		10	12,09 €
			80	11,31 €

ECO Design ERP Compliant. Adjustable 10-100% with regulators cutting start or end of phase. Constant current output 700mA. Independant use

Length (mm): 85,3 Width (mm): 41 High (mm): 22  
 Colour: White Voltage In (Vac): 220~240  
 Voltage Out (Vdc): 9~22 Intensidad Out (A): 0.7  
 Frecuency (Hz): 50~60 Power (W): 6.3~15.4  
 Room Temperature (°C): -25~+50  
 Critical Temperature (°C): 85 Ingress Protection: IP20  
 Dimmable: Corte inicio o fin de fase  
 Power factor: 0.95




	G503520		1	17,33 €
	LED Power Supply CC dimmable SLD20-350IL-Es		5	14,44 €
	350mA 18,9W		10	13,12 €
			100	12,26 €

ECO Design ERP Compliant. Dimmable 10-100% with leading or trailing edge dimmers. Constant current output 350mA.


Length (mm): 121 Width (mm): 45 High (mm): 20  
 Colour: White Voltage In (Vac): 220~240  
 Voltage Out (Vdc): 30~54 Intensidad Out (A): 0.35  
 Frecuency (Hz): 50~60 Power (W): 10.5~18.9  
 Room Temperature (°C): -20~+40  
 Critical Temperature (°C): 90 Ingress Protection: IP20  
 Dimmable: Corte inicio o fin de fase  
 Power factor: 0.95



Subfamily **Electronic Led power dimmable constant current**

Picture	Article	Description	Lot	Price/Unit
	GTC18350		1	17,00 €
	Led Driver CC MINI MD 350mA 18W		5	15,46 €
			10	14,05 €
	ECO ERP directives. 350mA constant current output power supply. Dimmable leading and trailing edge dimmers.		50	13,01 €
	Length (mm): 115 Width (mm): 52 High (mm): 22 Voltage In (Vac): 220~240 Voltage Out (Vdc): 25~51 Intensidad Out (A): 0.35 Frecuency (Hz): 50~60 Power (W): 8.75~18 Room Temperature (°C): -25~+50 Critical Temperature (°C): 75 Ingress Protection: IP20 Dimmable: Corte inicio o fin de fase Power factor: 0.95  Reference: 127030			




	G503520A		1	17,33 €
	LED Power Supply CC dimmable SLD20-500IL-Es 500mA 20W		5	14,44 €
			10	13,12 €
	ECO Design ERP Compliant. Dimmable 10-100% with leading or trailing edge dimmers. Constant current output 500mA.		100	12,26 €
	Length (mm): 121 Width (mm): 45 High (mm): 20 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 20~40 Intensidad Out (A): 0.5 Frecuency (Hz): 50~60 Power (W): 10~20 Room Temperature (°C): -20~+40 Critical Temperature (°C): 90 Ingress Protection: IP20 Dimmable: Corte inicio o fin de fase Power factor: 0.95			



LED TECHNOLOGY > Electronic Led Power Supplies > LED Power Supplies Constant Current


Subfamily **Electronic Led power dimmable constant current**

Picture	Article	Description	Lot	Price/Unit
	G503520B		1	17,33 €
	LED Power Supply CC dimmable SLD20-700IL-Es		5	14,44 €
	700mA 20,3W		10	13,12 €
	ECO Design ERP Compliant. Dimmable 10-100% with leading or trailing edge dimmers. Constant current output 700mA.		100	12,26 €
	Length (mm): 121 Width (mm): 45 High (mm): 20 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 15~29 Intensidad Out (A): 0.7 Frecuency (Hz): 50~60 Power (W): 10.5~20.3 Room Temperature (°C): -20~+40 Critical Temperature (°C): 90 Ingress Protection: IP20 Dimmable: Corte inicio o fin de fase Power factor: 0.95			



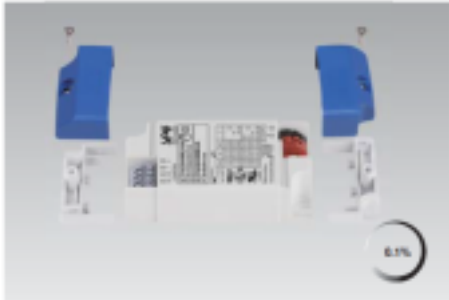
LED TECHNOLOGY > Electronic Led Power Supplies > LED Power Supplies Constant Current

Subfamily **Electronic Led power dimmable constant current**

Picture	Article	Description	Lot	Price/Unit
	G503520E		1	32,46 €
	LED Power Supply CC Dimmable 0/1-10V		5	29,51 €
	SLD20-500ILA-UN1 up to 500mA 20W		10	26,83 €
	ECO Design ERP Compliant. Dimmable 1-100% with 0 / 1-10V signal. Multi-current output 150-500mA dip-switch.		100	25,08 €
	Length (mm): 103,1 Width (mm): 41 High (mm): 22 Colour: White Voltage In (Vac): 110~277 Voltage Out (Vdc): 20~40 Intensidad Out (A): 0.15~0.5 Frecuency (Hz): 50~60 Power (W): 2.8~20 Room Temperature (°C): -20~+50 Critical Temperature (°C): 85 Life (Hours): 50000 Ingress Protection: IP20 Dimmable: 0-10V Power factor: 0.95			




Subfamily **Electronic Led power dimmable constant current**

Picture	Article	Description	Lot	Price/Unit
	G503620		1	34,31 €
	Led power CC Dimmable DALI SLD20-500IBD-UN		5	30,65 €
	hasta 500mA 20W		10	27,87 €
	ECO Design ERP.To incorporate. Adjustable DALI or PUSH DIM. Output to constant current selectable from 150mA to 500mA per DIP switch.		100	26,05 €
	Length (mm): 78,7 Width (mm): 41 High (mm): 22 Colour: White Voltage In (Vac): 110~277 Voltage Out (Vdc): 27~40 Intensidad Out (A): 0.15~0.5 Frecuency (Hz): 50~60 Power (W): 4~20 Room Temperature (°C): -25~+50 Critical Temperature (°C): 90 Ingress Protection: IP20 Dimmable: DALI Power factor: 0.84-0.95			



Subfamily **Electronic Led power dimmable constant current**


Picture	Article	Description	Lot	Price/Unit
	G503620A		1	37,23 €
	Led power CC Dimmable DALI SLD20-500ILD-UN hasta 500mA 20W		5	33,85 €
			10	30,77 €
			100	28,77 €
	ECO Design ERP Compliant. Independent use. Adjustable DALI2. Constant current output selectable from 150mA to 500mA by DIP switch.			
	Length (mm): 103,1 Width (mm): 41 High (mm): 22 Colour: White Voltage In (Vac): 110~277 Voltage Out (Vdc): 8~40 Intensidad Out (A): 0.15~0.5 Frecuency (Hz): 50~60 Power (W): 4~20 Room Temperature (°C): -20~+50 Critical Temperature (°C): 90 Ingress Protection: IP20 Dimmable: DALI Power factor: 0.94-0.95			



	G503720B		1	22,58 €
	Dimmable LED power supply DALI CC MIM-20D multi-corriente 700mA 20W		5	20,53 €
			10	18,66 €
			50	17,43 €
	ECO ERP Design. Constant multi-current output from 300mA to 700mA. Dimmable DALI and PUSH			
	Length (mm): 85 Width (mm): 43 High (mm): 23 Colour: White Voltage In (Vac): 220~240 Intensidad Out (A): 0.3~0.7 Frecuency (Hz): 50~60 Power (W): 12.6~20 Room Temperature (°C): -20~+60 Critical Temperature (°C): 90 Life (Hours): 50000 Ingress Protection: IP20 Dimmable: Push&DALI Power factor: 0.95			




Subfamily **Electronic Led power dimmable constant current**

Picture	Article	Description	Lot	Price/Unit
	GTC20500		1	17,34 €
	Led Driver CC MINI MD 500mA 20W		5	15,76 €
			10	14,33 €
	ECO ERP directives. 500mA constant current output power supply. Dimmable leading and trailing edge dimmers.		50	13,27 €
	Length (mm): 111 Width (mm): 52 High (mm): 22 Voltage In (Vac): 220~240 Voltage Out (Vdc): 16~42 Intensidad Out (A): 0.5 Frecuency (Hz): 50~60 Power (W): 20 Room Temperature (°C): -25~+45 Critical Temperature (°C): 75 Ingress Protection: IP20 Dimmable: Corte inicio o fin de fase Power factor: 0.95			
Reference: 127032				






Subfamily **Electronic Led power dimmable constant current**

Picture	Article	Description	Lot	Price/Unit
	GTC2070A		1	34,57 €
	Led Driver CV CC DIM MINI JOLLY DALI		5	31,43 €
	multi-current 700mA 20W		10	28,57 €
			50	26,46 €
	ECO ERP Directives. DALI dimmable. Output current selectable by DIP-SWITCH from 250mA to 700mA and at constant voltage 24Vdc			
	Length (mm): 111 Width (mm): 52 High (mm): 22 Voltage In (Vac): 110~240 Intensidad Out (A): 0.25~0.7 Frecuency (Hz): 50~60 Power (W): 1~20 Room Temperature (°C): -25~+45 Critical Temperature (°C): 75 Ingress Protection: IP20 Dimmable: DALI Power factor: 0.95  Reference: 125403			



Subfamily **Electronic Led power dimmable constant current**


Picture	Article	Description	Lot	Price/Unit
	GTC2070B		1	17,00 €
	Led Driver CC MINI MD 700mA 20W		5	15,46 €
			10	14,05 €
	ECO ERP directives. 700mA constant current output power supply. Dimmable leading and trailing edge dimmers.		50	13,01 €
	Length (mm): 115 Width (mm): 52 High (mm): 22 Voltage In (Vac): 220~240 Voltage Out (Vdc): 16~28 Intensidad Out (A): 0.7 Frecuency (Hz): 50~60 Power (W): 11.2~19.6 Room Temperature (°C): -25~+45 Critical Temperature (°C): 75 Ingress Protection: IP20 Dimmable: Corte inicio o fin de fase Power factor: 0.95			

Reference: 127034




LED TECHNOLOGY > Electronic Led Power Supplies > LED Power Supplies Constant Current

Subfamily **Electronic Led power dimmable constant current**

Picture	Article	Description	Lot	Price/Unit
	GTC20900		1	33,45 €
	Led Driver CV CC DIM 1-10V-P MINI JOLLY		5	30,41 €
	multicurrent 900mA 20W		10	27,64 €
	ECO ERP Directives. Dimmable 1-10V. Output current selectable by DIP-SWITCH from 250mA to 900mA and at constant voltage 12 and 24Vdc		50	25,60 €
	Length (mm): 111 Width (mm): 52 High (mm): 22 Voltage In (Vac): 110~240 Intensidad Out (A): 0.25~0.9 Frecuency (Hz): 50~60 Power (W): 1~20 Room Temperature (°C): -25~+50 Critical Temperature (°C): 80 Ingress Protection: IP20 Dimmable: 1-10V Power factor: 0.95			
Reference: 125400				



Subfamily **Electronic Led power dimmable constant current**


Picture	Article	Description	Lot	Price/Unit
	GTC2090A		1	24,91 €
	Led Driver CV CC DIM MINI JOLLY MD multi-current		5	22,65 €
	900mA 20W		10	20,58 €
	ECO ERP Directives. Dimmable by leading or trailing edge phase cut. Output current selectable by DIP-SWITCH from 250mA to 900mA and at constant voltage 12 and 24Vdc		50	19,06 €
	Length (mm): 111 Width (mm): 52 High (mm): 22 Voltage In (Vac): 220~240 Intensidad Out (A): 0.25~0.9 Frecuency (Hz): 50~60 Power (W): 3~20 Room Temperature (°C): -25~+45 Critical Temperature (°C): 75 Ingress Protection: IP20 Dimmable: Corte inicio o fin de fase Power factor: 0.85			

Reference: 127556





LED TECHNOLOGY > Electronic Led Power Supplies > LED Power Supplies Constant Current

Subfamily **Electronic Led power dimmable constant current**


Picture	Article	Description	Lot	Price/Unit
	G503623A		1	38,45 €
	Dimmable DC Led Power Supply DALI2		5	32,05 €
	SLD23-600IBD-UN up to 600mA 23W		10	29,13 €
	ECO ERP design. To incorporate. Dimmable DALI. DC output from 200 to 600mA with steps of 50mA.		50	26,98 €
	Length (mm): 64 Width (mm): 49,7 High (mm): 27 Colour: Black Voltage In (Vac): 120~240 Voltage Out (Vdc): 6~42 Frecuency (Hz): 50~60 Power (W): 4~23 Room Temperature (°C): -20~+50 Critical Temperature (°C): 90 Ingress Protection: IP20 Dimmable: DALI Power factor: 0.7-0.95			



	AD800579		1	34,96 €
	Multifunctional Led Power Supply CC-CV controllable by 0-10V or Push		5	31,79 €
	Selectable with output at 12 or 24V and at 350mA, 500mA or 700mA. Controllable with 0-10V or push. It can operate as master and slaves (max 9).		10	30,28 €
	Length (mm): 114 Width (mm): 68 High (mm): 23 Colour: White Room Temperature (°C): -20~+50 Critical Temperature (°C): 75 Dimmable: 0-10V			




Subfamily **Electronic Led power dimmable constant current**

Picture	Article	Description	Lot	Price/Unit
	G503525C		1	13,61 €
		Dimmable Led Power Supply CC NTF 350mA 25W	5	11,34 €
			10	10,32 €
		ECO Design ERP Compliant. Dimmable with leading and trailing edge dimmers. 350mA constant current output.	50	9,65 €
		Length (mm): 120 Width (mm): 45 High (mm): 28 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 36~72 Intensidad In (A): 0.16 Intensidad Out (A): 0.35 Frecuency (Hz): 50~60 Power (W): 12.5~25 Room Temperature (°C): -20~+45 Critical Temperature (°C): 85 Life (Hours): 50000 Ingress Protection: IP20 Dimmable: Corte inicio o fin de fase Power factor: 0.95		




Subfamily **Electronic Led power dimmable constant current**

Picture	Article	Description	Lot	Price/Unit
	G503525D		1	13,61 €
	Led Power Supply dimmable CC NTF 500mA 25W		5	11,34 €
			10	10,32 €
	ECO Design ERP Compliant. Dimmable with leading or trailing edge dimmers . Constant current output 500mA.		50	9,65 €
	Length (mm): 120 Width (mm): 45 High (mm): 28 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 25~50 Intensidad In (A): 0.16 Intensidad Out (A): 0.5 Frecuency (Hz): 50~60 Power (W): 12.6~25 Room Temperature (°C): -20~+45 Critical Temperature (°C): 85 Life (Hours): 50000 Ingress Protection: IP20 Dimmable: Corte inicio o fin de fase Power factor: 0.95			



Subfamily **Electronic Led power dimmable constant current**


Picture	Article	Description	Lot	Price/Unit
	G503525E		1	13,61 €
	Led Power Supply dimmable CC NTF 700mA 25W		5	11,34 €
			10	10,32 €
	ECO Design ERP Compliant. Dimmable with leading or trailing edge dimmers . Constant current output 700mA.		50	9,65 €
	Length (mm): 120 Width (mm): 45 High (mm): 28 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 18~36 Intensidad In (A): 0.16 Intensidad Out (A): 0.7 Frecuency (Hz): 50~60 Power (W): 12.6~25 Room Temperature (°C): -20~+45 Critical Temperature (°C): 85 Life (Hours): 50000 Ingress Protection: IP20 Dimmable: Corte inicio o fin de fase Power factor: 0.95			






LED TECHNOLOGY > Electronic Led Power Supplies > LED Power Supplies Constant Current

Subfamily **Electronic Led power dimmable constant current**


Picture	Article	Description	Lot	Price/Unit
	G503525F		1	12,88 €
	Dimmable CC LIM-25T Led power supply up to 600mA 25W		5	11,71 €
			10	10,65 €
			50	9,95 €
	ECO ERP design. Constant multcurrent output 350-450-500-600mA. 21-42V Dimmable by phase cut.			
	Length (mm): 156 Width (mm): 44 High (mm): 28 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 21~42 Intensidad Out (A): 0.35~0.6 Frecuency (Hz): 50~60 Power (W): 12.5~25 Room Temperature (°C): -20~+50 Critical Temperature (°C): 80 Life (Hours): 50000 Ingress Protection: IP20 Dimmable: Corte inicio o fin de fase Power factor: 0.95			




	G503725A		1	28,81 €
	Multicurrent Dimmabl Led power supply DALI DT8 CC IEM-25D TW 700mA 25W		5	26,19 €
			10	23,81 €
			100	22,25 €
	ECO ERP Design. Dimmable DALI DT8. Output current selectable by DIP-SWITCH from 260mA to 700mA			
	Length (mm): 124 Width (mm): 64 High (mm): 22,5 Colour: White Voltage In (Vac): 220~240 Intensidad Out (A): 0.26~0.7 Frecuency (Hz): 50~60 Power (W): 13~25 Room Temperature (°C): -20~+45 Critical Temperature (°C): 90 Ingress Protection: IP20 Dimmable: DALI Power factor: 0.95			



Subfamily **Electronic Led power dimmable constant current**


Picture	Article	Description	Lot	Price/Unit
	G503725B		1	86,07 €
	Multicurrent dimmabl Casambi Led power supply CC		5	78,25 €
	IEM-25BC TW 00mA 25W		10	71,13 €
	Dimmable CASAMBI bluetooth. Output current selectable by DIP-SWITCH from 260mA to 700mA		20	66,47 €
	Length (mm): 124 Width (mm): 64 High (mm): 22,5 Colour: White Voltage In (Vac): 220~240 Intensidad Out (A): 0.26~0.7 Frecuency (Hz): 50~60 Power (W): 13~25 Room Temperature (°C): -20~+45 Critical Temperature (°C): 90 Ingress Protection: IP20 Power factor: 0.95			




	G503825		1	17,86 €
	Dimmable Led power supply 0 / 1-10V DC IE-25A multi-current 25W		5	16,25 €
	ECO Design ERP Compliant. Constant multi-current output from 200mA to 700mA.		10	14,78 €
	Length (mm): 119 Width (mm): 52 High (mm): 22,5 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 6~50 Intensidad In (A): 0.16 Intensidad Out (A): 0.5~0.7 Frecuency (Hz): 50~60 Power (W): 3~25 Room Temperature (°C): -20~+50 Critical Temperature (°C): 85 Life (Hours): 50000 Ingress Protection: IP20 Dimmable: 0-10V Power factor: 0.95		50	13,79 €



Subfamily **Electronic Led power dimmable constant current**


Picture	Article	Description	Lot	Price/Unit
	G503825D		1	28,08 €
	Dimmable Led driver DALI CC IE-25D multi current		5	25,55 €
	25W		10	23,21 €
	ECO Design ERP Compliant. Constant multi-current output from 260mA to 700mA.		50	21,70 €
	Length (mm): 119 Width (mm): 52 High (mm): 22,5 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 20~55 Intensidad Out (A): 0.45~0.7 Frecuency (Hz): 50~60 Power (W): 9~25 Room Temperature (°C): -20~+50 Critical Temperature (°C): 85 Life (Hours): 50000 Ingress Protection: IP20 Dimmable: DALI Power factor: 0.95			




	G503530B		1	19,93 €
	LED Power Supply dimmable SLD30-700IL-Es		5	18,11 €
	700mA 29,4W		10	16,46 €
	ECO Design ERP Compliant. Dimmable 10-100% with leading or trailing edge dimmers. Constant current output 700mA.		50	15,39 €
	Length (mm): 165 Width (mm): 40 High (mm): 30 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 21~42 Intensidad Out (A): 0.7 Frecuency (Hz): 50~60 Power (W): 14.7~29.4 Room Temperature (°C): -20~+40 Critical Temperature (°C): 75 Ingress Protection: IP20 Dimmable: Corte inicio o fin de fase Power factor: 0.9			



Subfamily **Electronic Led power dimmable constant current**


Picture	Article	Description	Lot	Price/Unit
	G503530		1	19,93 €
	LED Power Supply dimmable SLD30-500IL-Es		5	18,11 €
	500mA 30W		10	16,46 €
	ECO Design ERP Compliant. Dimmable 10-100% with leading or trailing edge dimmers. Constant current output 500mA.		50	15,39 €
	Length (mm): 165 Width (mm): 40 High (mm): 30 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 30~60 Intensidad Out (A): 0.5 Frecuency (Hz): 50~60 Power (W): 15~30 Room Temperature (°C): -20~+40 Critical Temperature (°C): 75 Ingress Protection: IP20 Dimmable: Corte inicio o fin de fase Power factor: 0.9			




	G503530A		1	19,93 €
	LED Power Supply dimmable SLD30-600IL-Es		5	18,11 €
	600mA 30W		10	16,46 €
	ECO Design ERP Compliant. Dimmable 10-100% with leading or trailing edge dimmers. Constant current output 600mA.		50	15,39 €
	Length (mm): 165 Width (mm): 40 High (mm): 30 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 25~50 Intensidad Out (A): 0.6 Frecuency (Hz): 50~60 Power (W): 15~30 Room Temperature (°C): -20~+40 Critical Temperature (°C): 75 Ingress Protection: IP20 Dimmable: Corte inicio o fin de fase Power factor: 0.9			



Subfamily **Electronic Led power dimmable constant current**


Picture	Article	Description	Lot	Price/Unit
	G503830A		1	24,91 €
	Dimmable LED power supply DALI CC MIM-30D		5	22,65 €
	multi-corriente 1050mA30W		10	20,59 €
			50	19,24 €
	ECO ERP Design. Constant multi-current output from 500mA to 1050mA. Dimmable DALI and PUSH			
	Length (mm): 93 Width (mm): 55 High (mm): 32 Colour: White Voltage In (Vac): 220~240 Intensidad Out (A): 0.5~1.05 Frecuency (Hz): 50~60 Power (W): 20~29.2 Room Temperature (°C): -20~+60 Critical Temperature (°C): 90 Life (Hours): 50000 Ingress Protection: IP20 Dimmable: Push&DALI Power factor: 0.95			



	GTC3270A		1	37,06 €
	Led Driver CV CC DIM JOLLY DALI multi-current		5	33,70 €
	700mA 32W		10	30,65 €
			50	28,37 €
	ECO ERP Directives. DALI dimmable. Output current selectable by DIP-SWITCH from 250mA to 700mA and at constant voltage 12 and 24Vdc			
	Length (mm): 103 Width (mm): 67 High (mm): 21 Voltage In (Vac): 110~240 Intensidad Out (A): 0.25~0.7 Frecuency (Hz): 50~60 Power (W): 1~32 Room Temperature (°C): -25~+50 Critical Temperature (°C): 75 Ingress Protection: IP20 Dimmable: DALI Power factor: 0.95  Reference: 125424			




Subfamily **Electronic Led power dimmable constant current**

Picture	Article	Description	Lot	Price/Unit
	GTC32900		1	39,08 €
	Led Driver CV CC DIM 1-10V-P JOLLY US		5	35,52 €
	multicurrent 900mA 32W		10	32,29 €
			50	29,90 €
	ECO ERP Directives. Adjustable 1-10V. Output current selectable by DIP-SWITCH from 250mA to 900mA and at constant voltage 12 and 24Vdc			
	Length (mm): 103 Width (mm): 67 High (mm): 21 Voltage In (Vac): 110~240 Intensidad Out (A): 0.25~0.9 Frecuency (Hz): 50~60 Power (W): 1~33 Room Temperature (°C): -25~+45 Critical Temperature (°C): 75 Ingress Protection: IP20 Dimmable: 1-10V Power factor: 0.95  Reference: 126421			




Subfamily **Electronic Led power dimmable constant current**

Picture	Article	Description	Lot	Price/Unit
	GTC3290A		1	40,69 €
	Led Driver CV CC DIM JOLLY MD multcurrent		5	37,00 €
	900mA 32W		10	33,63 €
	ECO ERP Directives. DALI dimmable. Output current selectable by DIP-SWITCH from 350mA to 750mA		40	31,15 €
	Length (mm): 166 Width (mm): 46 High (mm): 34 Voltage In (Vac): 220~240 Intensidad Out (A): 0.35~0.75 Frecuency (Hz): 50~60 Power (W): 0~32 Room Temperature (°C): -25~+45 Critical Temperature (°C): 75 Ingress Protection: IP20 Dimmable: Corte inicio o fin de fase Power factor: 0.97			
Reference: 122260				



Subfamily **Electronic Led power dimmable constant current**


Picture	Article	Description	Lot	Price/Unit
	G503635A		1	41,15 €
	LED Power Supply CC SLT351000ILD-UN DC power supply up to 1000mA		5	37,40 €
			10	34,01 €
			100	31,79 €
	ECO Design ERP Compliant. Independent use. Adjustable DALI or PUSH DIM. Output to constant current selectable from 250mA to 1000mA by DIP switch.			
	Length (mm): 139 Width (mm): 42 High (mm): 29,8 Colour: White Voltage In (Vac): 110~277 Voltage Out (Vdc): 8~42 Intensidad Out (A): 0.25~1 Frecuency (Hz): 50~60 Power (W): 5.2~35 Room Temperature (°C): -20~+50 Critical Temperature (°C): 90 Ingress Protection: IP20 Dimmable: DALI Power factor: 0.95			






LED TECHNOLOGY > Electronic Led Power Supplies > LED Power Supplies Constant Current

Subfamily **Electronic Led power dimmable constant current**


Picture	Article	Description	Lot	Price/Unit
	GTC381050		1	38,51 €
	Led Driver CC DIM PROFESSIONALE DALI		5	34,98 €
	multi-current 1050mA 38W		10	31,81 €
			40	29,45 €
	ECO ERP Directives. DALI dimmable. Output current selectable by DIP-SWITCH from 300mA to 1050mA			
	Length (mm): 146 Width (mm): 44 High (mm): 30 Voltage In (Vac): 220~240 Intensidad Out (A): 0.3~1.05 Frecuency (Hz): 50~60 Power (W): 3~38 Room Temperature (°C): -25~+45 Critical Temperature (°C): 85 Ingress Protection: IP20 Dimmable: DALI Power factor: 0.95  Reference: 127490			



Subfamily **Electronic Led power dimmable constant current**

Picture	Article	Description	Lot	Price/Unit
	G503540B		1	21,02 €
	LED Power Supply dimmable SLD40-900IL-Es		5	19,10 €
	900mA 39,6W		10	17,37 €
	ECO Design ERP Compliant. Dimmable 10-100% with leading or trailing edge dimmers. Constant current output 900mA.		50	16,24 €
	Length (mm): 165 Width (mm): 40 High (mm): 30 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 22~44 Intensidad Out (A): 0.9 Frecuency (Hz): 50~60 Power (W): 19.8~39.6 Room Temperature (°C): -20~+40 Critical Temperature (°C): 75 Ingress Protection: IP20 Dimmable: Corte inicio o fin de fase Power factor: 0.90			




	A491820		1	30,68 €
	Led Driver CC DIM JOLLY DALI 2 PUSH multicurrent		5	27,89 €
	1050mA 40W		15	25,42 €
	ECO ERP Directives. DALI and Push dimmable. Output current selectable by DIP-SWITCH from 300mA to 1050mA		45	23,80 €
	Length (mm): 119 Width (mm): 67 High (mm): 24 Voltage In (Vac): 220~240 Intensidad Out (A): 0.3~1.05 Frecuency (Hz): 50~60 Power (W): 12~42 Room Temperature (°C): +50 Critical Temperature (°C): 85 Ingress Protection: IP20 Dimmable: Push&DALI			



LED TECHNOLOGY > Electronic Led Power Supplies > LED Power Supplies Constant Current


Subfamily **Electronic Led power dimmable constant current**

Picture	Article	Description	Lot	Price/Unit
	G503540H		1	17,99 €
	Led Power Supply dimmable CC NTF 700mA 40W		5	14,99 €
	ECO Design ERP Compliant. Dimmable with leading or trailing edge dimmers . Constant current output 700mA.		10	13,62 €
			50	12,74 €
	Length (mm): 166 Width (mm): 52 High (mm): 24 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 28~56 Intensidad In (A): 0.3 Intensidad Out (A): 0.7 Frecuency (Hz): 50~60 Power (W): 20~40 Room Temperature (°C): -20~+50 Critical Temperature (°C): 80 Life (Hours): 30000 Ingress Protection: IP20 Dimmable: Corte inicio o fin de fase Power factor: 0.95			




LED TECHNOLOGY > Electronic Led Power Supplies > LED Power Supplies Constant Current

Subfamily **Electronic Led power dimmable constant current**


Picture	Article	Description	Lot	Price/Unit
	G503540J		1	15,55 €
	Led Power Supply dimmable CC NTF 500mA 40W		5	12,96 €
	ECO Design ERP Compliant. Dimmable with leading or trailing edge dimmers . Constant current output 500mA.		10	11,78 €
			50	11,02 €
	Length (mm): 166 Width (mm): 52 High (mm): 24 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 40~80 Intensidad In (A): 0.3 Intensidad Out (A): 0.5 Frecuency (Hz): 50~60 Power (W): 20~40 Room Temperature (°C): -20~+50 Critical Temperature (°C): 80 Life (Hours): 50000 Ingress Protection: IP20 Dimmable: Corte inicio o fin de fase Power factor: 0.95			




	G503840A		1	26,07 €
	Dimmable DALI DC MIM-30D multcurrent Led power supply 1200mA40W		5	23,70 €
	ECO ERP Design. Constant multi-current output from 700mA to 1200mA. Dimmable DALI and PUSH		10	21,54 €
			50	20,14 €
	Length (mm): 93 Width (mm): 55 High (mm): 32 Colour: White Voltage In (Vac): 220~240 Intensidad Out (A): 0.7~1.2 Frecuency (Hz): 50~60 Power (W): 29.4~40 Room Temperature (°C): -20~+60 Critical Temperature (°C): 90 Life (Hours): 50000 Ingress Protection: IP20 Dimmable: Push&DALI Power factor: 0.95			



Subfamily **Electronic Led power dimmable constant current**

Picture	Article	Description	Lot	Price/Unit
	G503815A		1	45,60 €
	Dimmable DC Led Power Supply DALI2		5	38,00 €
	SLD45-1150IBD-UN up to 1150mA 45W		10	34,54 €
	ECO ERP design. To incorporate. DC output from 400 to 1150mA with steps of 50mA. Dimmable DALI		50	31,98 €
	Length (mm): 75,5 Width (mm): 56 High (mm): 30 Diameter (mm): 75,5 Colour: Black Voltage In (Vac): 120~240 Voltage Out (Vdc): 6~42 Frecuency (Hz): 50~60 Power (W): 4~45 Room Temperature (°C): -20~+50 Critical Temperature (°C): 90 Ingress Protection: IP20 Dimmable: DALI Power factor: 0.7-0.95			




	G503845A		1	22,89 €
	Dimmable Led driver DALI CC LC-45D multi current 45W		5	20,81 €
	SLR-2021 Compliant. Constant multi-current output from 350mA to 1050mA.		10	18,92 €
	Length (mm): 280 Width (mm): 31,5 High (mm): 22 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 21~70 Intensidad Out (A): 0.7~1.05 Frecuency (Hz): 50~60 Power (W): 17.5~45 Room Temperature (°C): -20~+50 Critical Temperature (°C): 80 Life (Hours): 50000 Ingress Protection: IP20 Dimmable: DALI Power factor: 0.95		50	17,68 €




LED TECHNOLOGY > Electronic Led Power Supplies > LED Power Supplies Constant Current

Subfamily **Electronic Led power dimmable constant current**


Picture	Article	Description	Lot	Price/Unit
	G503845E		1	28,70 €
		Dimmable Led power supply DALI CC IE-45HD	5	26,10 €
		multi-current 45W	10	23,73 €
			50	22,18 €
		ECO ERP Design. Constant multicurrent output from 1050mA to 1600mA.		
		Length (mm): 135 Width (mm): 72 High (mm): 24 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 14~43 Intensidad Out (A): 1.05~1.6 Frecuency (Hz): 50~60 Power (W): 15~45 Temperature (°C): 25 Room Temperature (°C): -20~+50 Critical Temperature (°C): 85 Life (Hours): 50000 Ingress Protection: IP20 Dimmable: DALI Power factor: 0.95		



	G503845F		1	31,27 €
		Multicurrent Dimmab Led power supply DALI DT8 CC	5	28,43 €
		IEM-45D TW 1050mA 45W	10	25,84 €
			100	24,15 €
		ECO ERP Design. Dimmable DALI DT8. Output current selectable by DIP-SWITCH from 350mA to 1050mA		
		Length (mm): 135 Width (mm): 72 High (mm): 24 Colour: White Voltage In (Vac): 220~240 Intensidad Out (A): 0.35~1.05 Frecuency (Hz): 50~60 Power (W): 17.5~45 Room Temperature (°C): -20~+45 Critical Temperature (°C): 90 Ingress Protection: IP20 Dimmable: DALI Power factor: 0.95		




Subfamily **Electronic Led power dimmable constant current**

Picture	Article	Description	Lot	Price/Unit
	GTC601050		1	61,56 €
	Led Driver CC DIM MAXI JOLLY US DALI		5	55,97 €
	multi-current 1050mA 60W		10	50,87 €
	ECO ERP Directives. DALI dimmable. Output current selectable by DIP-SWITCH from 350mA to 1050mA		50	47,10 €
	Length (mm): 124 Width (mm): 79 High (mm): 22 Voltage In (Vac): 110~240 Intensidad Out (A): 0.35~1.05 Frecuency (Hz): 50~60 Power (W): 1~60 Room Temperature (°C): -25~+50 Critical Temperature (°C): 90 Ingress Protection: IP20 Dimmable: DALI Power factor: 0,95			


Reference: 127413




	GTC60105A		1	55,73 €
	Led Driver CC DIM 1-10V MAXI JOLLY US		5	50,66 €
	multicurrent 1050mA 60W		10	46,06 €
	Length (mm): 111 Width (mm): 79 High (mm): 22 Voltage In (Vac): 110~240 Intensidad Out (A): 0.35~1.05 Frecuency (Hz): 50~60 Power (W): 1~60 Room Temperature (°C): -25~+50 Critical Temperature (°C): 90 Ingress Protection: IP20 Dimmable: 0/1-10V Power factor: 0.95		50	42,65 €
	Reference: 127411			



Subfamily **Electronic Led power dimmable constant current**

Picture	Article	Description	Lot	Price/Unit
	GTC60700		1	53,51 €
	Led Driver CC DIM MAXI JOLLY HV multi-current		5	48,65 €
	700mA 60W		10	44,23 €
	ECO ERP Directives. 1-10V & Push dimmable. Output current selectable by DIP-SWITCH from 250mA to 700mA		50	40,95 €
	Length (mm): 124 Width (mm): 79 High (mm): 22 Voltage In (Vac): 110~240 Intensidad Out (A): 0.25~0.7 Frecuency (Hz): 50~60 Power (W): 3~60 Room Temperature (°C): -25~+50 Critical Temperature (°C): 90 Ingress Protection: IP20 Dimmable: 1-10V & Push Power factor: 0.95			
Reference: 127414				




	G503875D		1	37,45 €
	Dimmable Led driver DALI CC LC-75D multi current		5	34,06 €
	75W		10	30,95 €
	SLR-2021 Compliant. Constant multi-current output from 1050mA to 1600mA.		50	28,93 €
	Length (mm): 360 Width (mm): 30 High (mm): 21 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 23~71 Intensidad Out (A): 1.05~1.6 Frecuency (Hz): 50~60 Power (W): 26.3~75 Room Temperature (°C): -20~+50 Critical Temperature (°C): 80 Life (Hours): 50000 Ingress Protection: IP20 Dimmable: DALI Power factor: 0.95			





LED TECHNOLOGY > Electronic Led Power Supplies > LED Power Supplies Constant Current

Subfamily **Electronic Led power dimmable constant current**

Picture	Article	Description	Lot	Price/Unit
	G503875E		1	38,88 €
	Dimmable Led power supply DALI CC IE-75D		5	35,35 €
	multi-current 75W		10	32,14 €
	ECO ERP Design. Constant multcurrent output from 1050mA to 1600mA.		50	30,03 €
	Length (mm): 159 Width (mm): 79 High (mm): 30 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 23~71 Intensidad Out (A): 1.05~1.6 Frecuency (Hz): 50~60 Power (W): 26~75 Temperature (°C): 25 Room Temperature (°C): -20~+40 Critical Temperature (°C): 80 Life (Hours): 50000 Ingress Protection: IP20 Dimmable: DALI Power factor: 0.95			

