


LED TECHNOLOGY > Led modules > Battery Led Modules  
Configurable Led battery modules

## G5K000P0

### Crown control board module led to battery GPC

December 22nd, 2024, 03:54

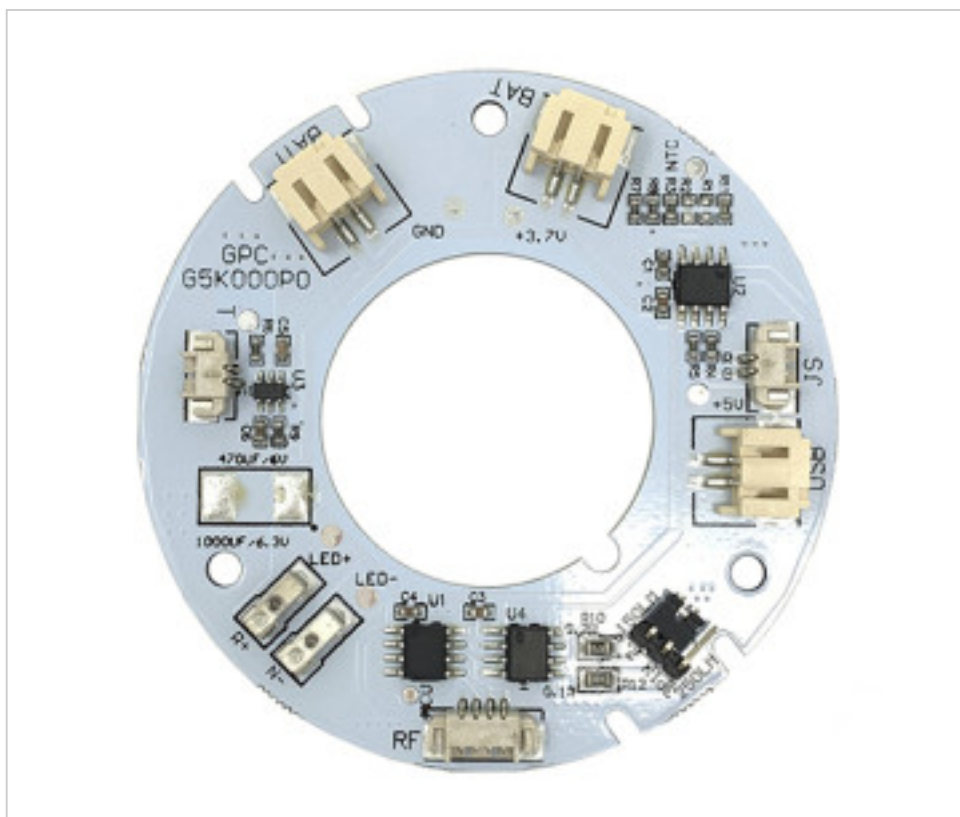

## DESCRIPTION

Fiberglass plate in the shape of a circular crown. Outside diameter 65mm; inside 31mm. With 3 fixing holes with a diameter of 3mm at 120 degrees, the plate has a Jumper controller that allows you to choose the luminous flux at 150lm or 250lm. Connectors for 1 or 2 batteries. If only one battery is put in, the other connector is free. The battery can be connected indistinctly to any of the 2 connectors and must always be connected after connecting the touch control. Depending on the luminous flux selected, it is possible to choose to put one or two batteries depending on the necessary autonomy time. Connector for touch control and to the micro USB. Independent connectors + and - for led

## PRICE

Lot	P.V.P. excluding VAT
1	11,84€
10	10,78€
40	9,78€
80	9,32€



LED TECHNOLOGY > Led modules > Battery Led Modules  
Configurable Led battery modules

G5K000P0

Crown control board module led to battery GPC

## TECHNICAL SPECIFICATIONS

---

### SYMBOLS



### CERTIFICADOS



Weight: 11 Grams

Packging: Box 1 Unit

## NOTES

---

Jumper that allows you to choose 150lm or 250lm. Connectors with 1 or 2 batteries, touch and micro USB.<br>The compatible battery is G5K000P1 and must be connected after the touch control

## OTHER FEATURES

---

Diameter (mm): 65

Ingress Protection: IP20

Dimmable: SI

## DOCUMENTS

---

 [Data Sheet](#)

 [CE](#)