


G503730A

Dimmable DC Led Power Supply MINI-30-700T 700mA 30W

January 08th, 2025, 07:25

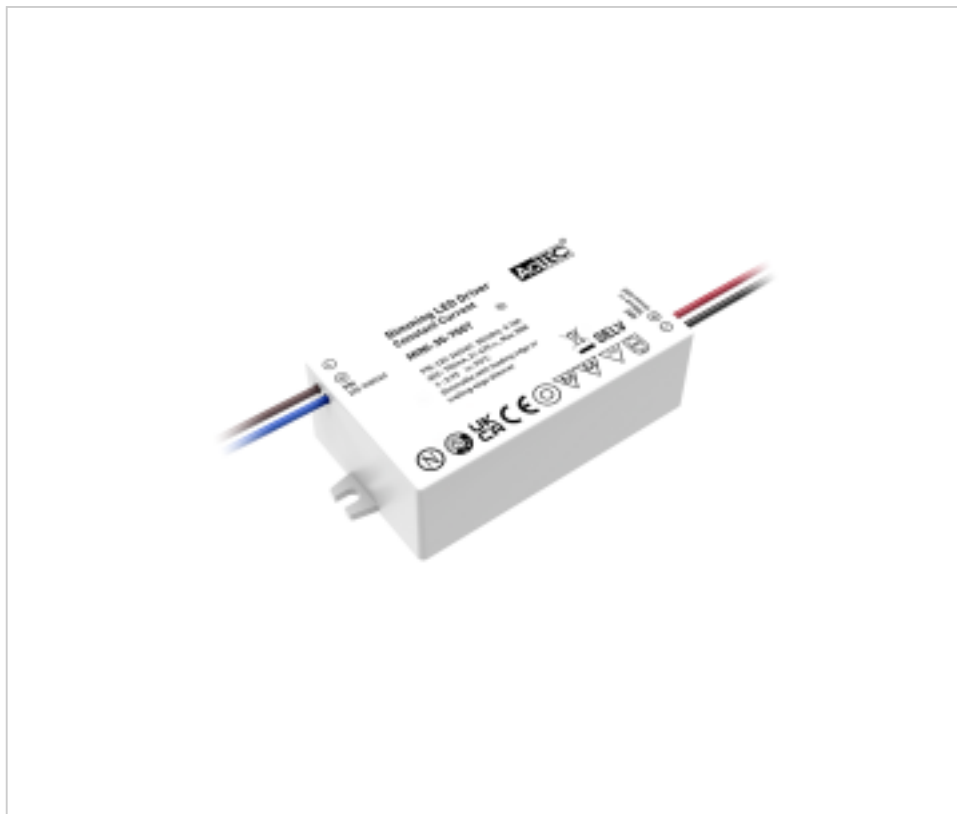

DESCRIPTION

IP20 LED power supply for incorporation with constant current output 700mA. Output voltage from 21 to 42Vdc. Wiring 18cm. in primary VDE 7022 0.5mm² and secondary VDE 7902 0.5mm². Class II. Protection against open circuit, short circuit, overload and over temperature. Automatic reset in case of failure.

PRICE

	Lot	P.V.P. excluding VAT
	1	12,68€
	1	9,75€

Continued on next page >>

G503730A

Dimmable DC Led Power Supply MINI-30-700T 700mA 30W

TECHNICAL SPECIFICATIONS

SYMBOLS



SELV



CB



**UK
CA**



Weight: 125 Grams

NOTES

ECO ERP Design. IP20. Constant current output 700mA. Adjustable start or end of phase cut

OTHER FEATURES

Length (mm): 85

High (mm): 23

Voltage Out (Vdc): 21~42

Frecuency (Hz): 50~60

Room Temperature (°C): -20~+60

Life (Hours): 50000

Dimmable: Corte inicio o fin de fase

Width (mm): 43

Voltage In (Vac): 220~240

Intensidad Out (A): 0.7

Power (W): 30

Critical Temperature (°C): 90

Ingress Protection: IP20

Power factor: 0.95

DOCUMENTS

 [Data Sheet](#)



 [CB](#)

 [CE](#)

 [NEMKO \(Norway\)](#)