


G503830A

Dimmable LED power supply DALI CC MIM-30D multi-corriente 1050mA30W

December 04th, 2024, 20:08

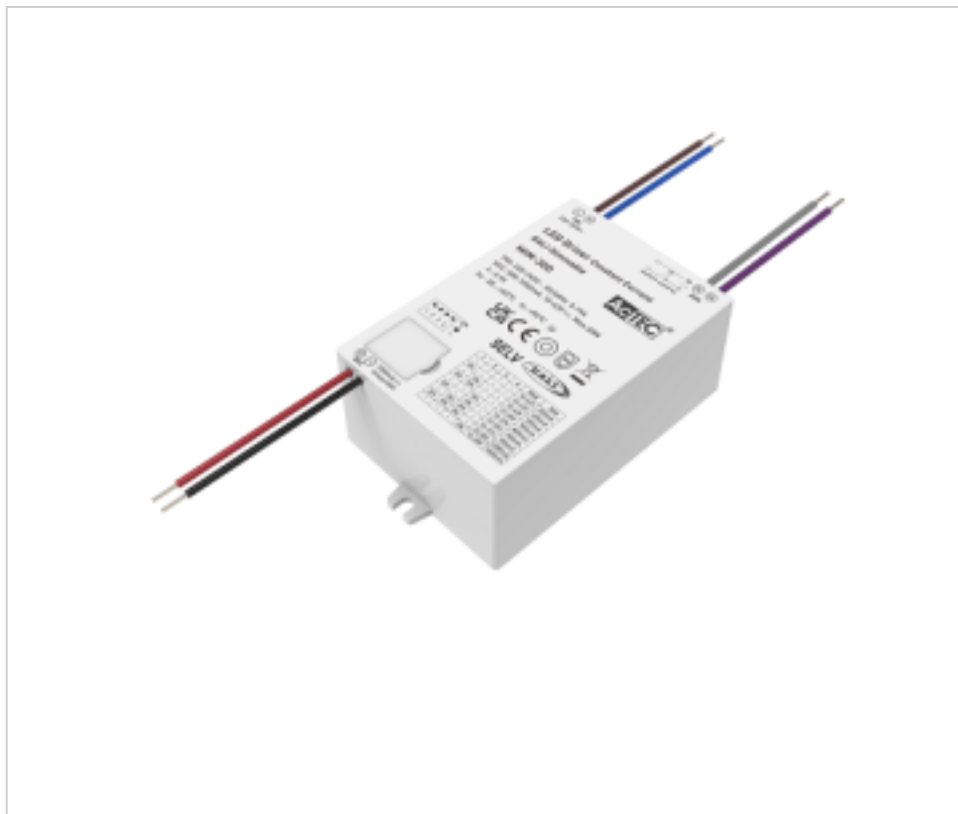

DESCRIPTION

Dimmable Led power supply to incorporate DALI-2 certificate (incl. Parts 251, 252,253) with multi constant current output configurable with Dip-switch from 500mA (10-42Vdc) to 1050mA (10-28Vdc). Regulation range 0.1-100%. Wiring with 18cm cable in primary, secondary and DALI. Dimmable by DALI and PUSH. ON-OFF hallway function and dimming with motion sensor. Protection against open circuit, short circuit, over load and over temperature. Automatic reset in case of failure.

PRICE

Lot	P.V.P. excluding VAT
1	24,91€
5	22,65€
10	20,59€
50	19,24€



G503830A

Dimmable LED power supply DALI CC MIM-30D multi-corriente 1050mA30W

TECHNICAL SPECIFICATIONS

SYMBOLS



SELV

CB



**UK
CA**



Weight: 211 Grams

NOTES

ECO ERP Design. Constant multi-current output from 500mA to 1050mA. Dimmable DALI and PUSH

OTHER FEATURES

Length (mm): 93

Width (mm): 55

High (mm): 32

Colour: White

Voltage In (Vac): 220~240

Intensidad Out (A): 0.5~1.05

Frecuency (Hz): 50~60

Power (W): 20~29.2

Room Temperature (°C): -20~+60

Critical Temperature (°C): 90

Life (Hours): 50000

Ingress Protection: IP20

Dimmable: Push&DALI

Power factor: 0.95

DOCUMENTS

 [Data Sheet](#)



 [CB](#)

 [CE](#)

 [NEMKO \(Norway\)](#)