

**GTC32725 - 127572**

**Led Driver CC PROFLAT 30 Multicurrent up to 725mA 32W**

January 07th, 2025, 02:32



## DESCRIPTION

Led power supply for built-in use with constant multi-current output selectable by DIP switch. High efficiency 90%. Class II. Output current from 350mA to 725mA. Protection against open circuit, short circuit, over load and over temperature. Warranty 7 years (3% failure ratio) 10 years (5% failure ratio). TCI Code 127572

## PRICE

Lot	P.V.P. excluding VAT
1	14,61€
5	13,29€
10	12,08€
50	11,18€

Continued on next page >>

GTC32725 - 127572


**Led Driver CC PROFLAT 30 Multicurrent up to 725mA 32W**

## TECHNICAL SPECIFICATIONS

### SYMBOLS



### CERTIFICADOS

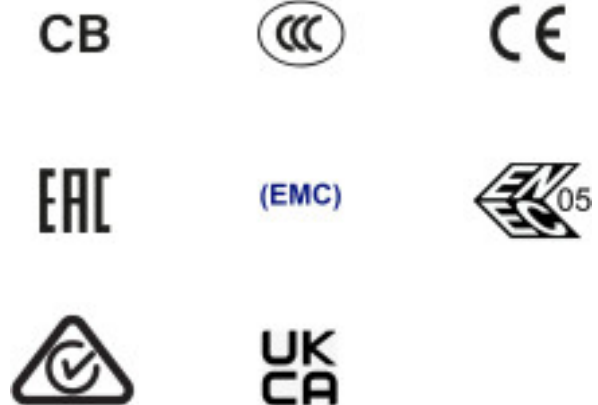

Weight: 113 Grams

### NOTES

ECO ERP Directives. DIP-SWITCH selectable output current from 350mA to 725mA

### OTHER FEATURES

Length (mm): 146	Width (mm): 43
High (mm): 22	Voltage In (Vac): 220~240
Intensidad Out (A): 0.35~0.725	Frecuency (Hz): 50~60
Power (W): 3~32	Room Temperature (°C): -25~+45
Critical Temperature (°C): 85	Ingress Protection: IP20
Dimmable: NO	Power factor: 0.95

### DOCUMENTS

-  [Data Sheet](#)
-  [Led Driver CC PROFLAT 30 Multicurrent up to 725mA 32W](#)
-  [CB](#)
-  [CCC \(China\)](#)
-  [CE](#)
-  [EAC \(RUSIA\)](#)
-  [Electromagnetic compatibility](#)
-  [ENEC \(Netherlands\)](#)
-  [Regulatory Compliance Mark for Australia](#)
-  [UKCA](#)