


G503703D

Led Power Supply CC Mini-3.6-700 700mA 3.6W IP20

February 01st, 2025, 20:32

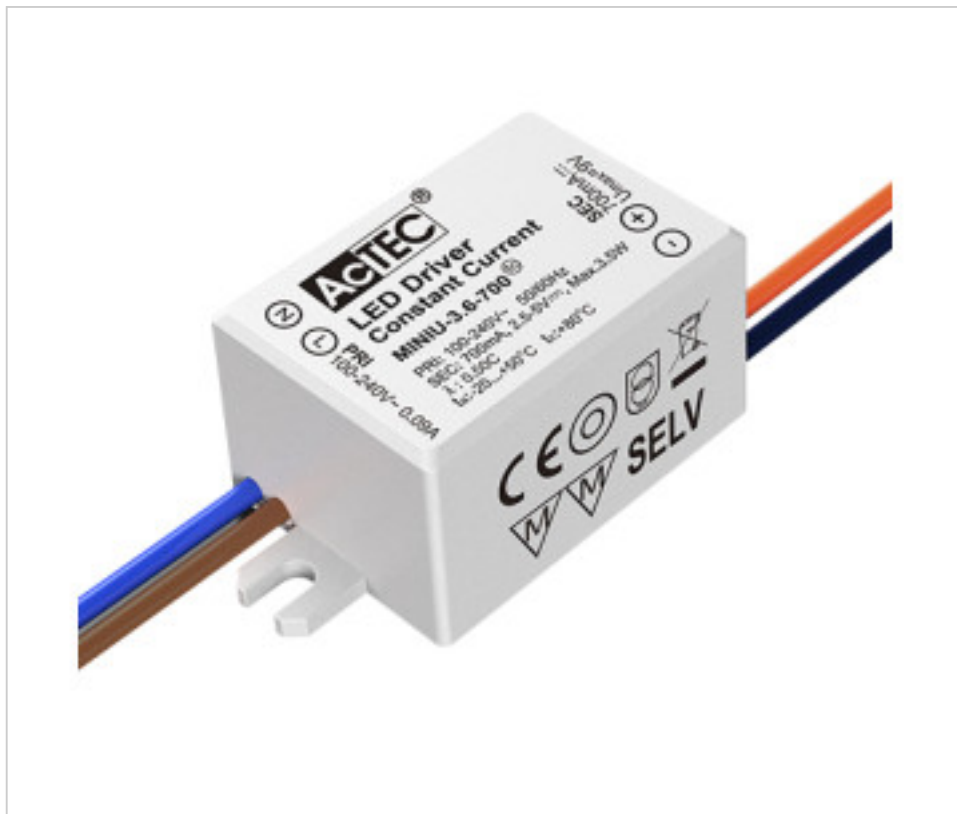

DESCRIPTION

Led power supply to incorporate with 700mA constant current output. Universal input voltage 100-240Vac. Output voltage from 2.5 to 5Vdc. Power range from 1.75 to 3.5W. Primary wiring with 18cm VDE 7726 0.5mm² cable and secondary wiring with 18cm UL1007 18AWG cable. Class II. Protection against open circuit, short circuit, over load and over temperature. Automatic reset in case of failure.

PRICE

	Lot	P.V.P. excluding VAT
	1	6,10€
	5	5,54€
	10	5,03€
	50	4,71€



Continued on next page >>

G503703D

Led Power Supply CC Mini-3.6-700 700mA 3.6W IP20

TECHNICAL SPECIFICATIONS

SYMBOLS



SELV



CERTIFICADOS



CB



Weight: 42 Grams

Packging: Box 1 Unit

NOTES

ECO ERP Design. IP20. Constant current output 700mA.

OTHER FEATURES

Length (mm): 53

Width (mm): 27

High (mm): 21

Colour: White

Voltage In (Vac): 100~240

Voltage Out (Vdc): 2.5~5

Intensidad Out (A): 0.7

Frecuency (Hz): 50~60

Power (W): 1.75~3.5

Room Temperature (°C): -20~+50

Critical Temperature (°C): 80

Life (Hours): 50000

Ingress Protection: IP20

Dimmable: NO

Power factor: 0.50

DOCUMENTS

 [Data Sheet](#)

 [Led Power Supply CC Mini-3.6-700 700mA 3.6W IP20](#)

 [CB](#)

 [Electromagnetic compatibility TÜV SÜD](#)

 [Safety TUV CERTIFIED](#)