


G503801

LED Power Supply CC SLT35-1000IL-UN multi output current 250-1000mA

March 09th, 2025, 16:50

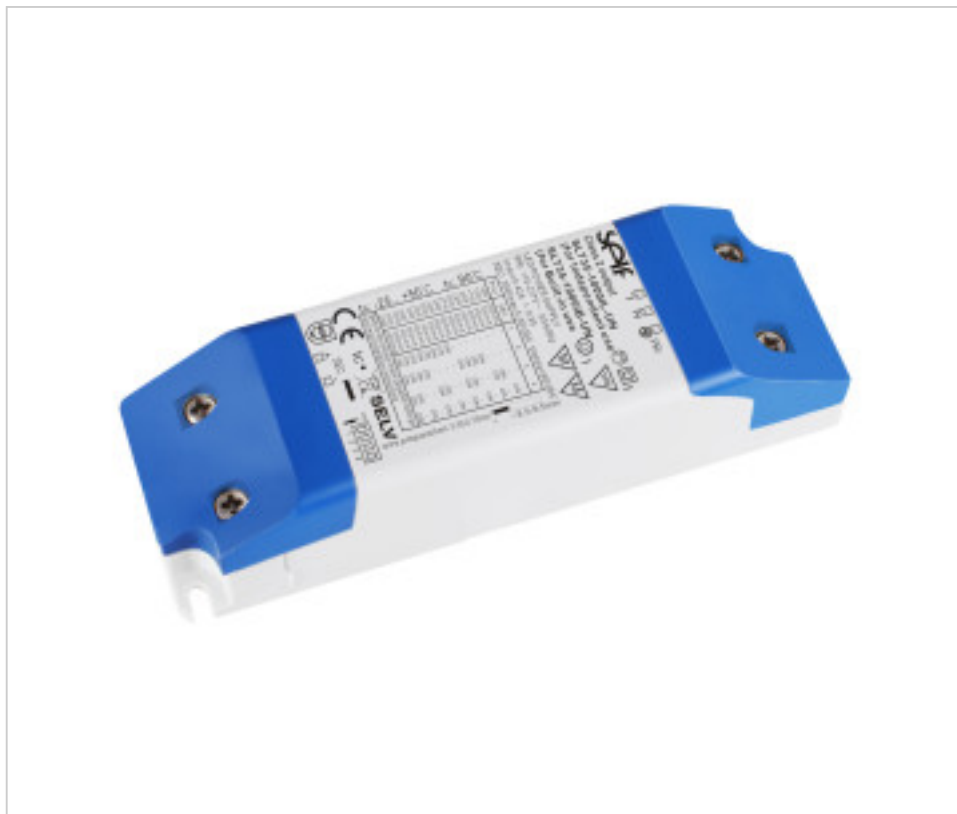

DESCRIPTION

Led power supply for independent use with constant multi-current output selectable by DIP switch. Output voltage range 2-50V High efficiency.
 Class II. Quick connection terminals.
 Selectable outputs: 250mA-12W; 300mA-15W; 350 mA -17W; 400mA-20W; 450mA-22W; 500mA-25W; 550mA-27W; 600mA-30W; 650mA-32W; 700mA, 750mA, 800mA, 850mA, 900mA, 950mA, 1000mA 35W. Protection against open circuit, short circuit, over load and over temperature. Automatic reset. Warranty 5 years.

PRICE

Lot	P.V.P. excluding VAT
1	23,96€
5	21,79€
10	19,81€
50	18,51€



G503801

LED Power Supply CC SLT35-1000IL-UN multi output current 250-1000mA

TECHNICAL SPECIFICATIONS

SYMBOLS



SELV



CERTIFICADOS



Weight: 160 Grams

Packging: Box 1 Unit

NOTES

ECO Design ERP Compliant. Selectable constant output current from 250mA to 1000mA by DIP switch. Class II

OTHER FEATURES

Length (mm): 135,5

Width (mm): 39

High (mm): 30

Colour: White

Voltage In (Vac): 110~277

Voltage Out (Vdc): 2~50

Intensidad Out (A): 0.25~1

Frecuency (Hz): 50~60

Power (W): 0.5~35

Room Temperature (°C): -25~+50

Critical Temperature (°C): 90

Ingress Protection: IP20

Dimmable: NO

Power factor: 0.75-0.9

DOCUMENTS

 [Data Sheet](#)

 [Data Sheet](#)

 [LED Power Supply CC SLT35-1000IL-UN multi output current 250-1000mA](#)

 [C UR U.S. \(USA-Canada\)](#)

 [CCC \(China\)](#)

 [MEEI \(Hungary\)](#)

 [Regulatory Compliance Mark for Australia](#)