

Daylight Sensor—SL01A


Product Feature:

- High sensitive light sensor inside
- Detect environmental luminance and dimmer automatically
- Adjustable daylight sensor threshold
- Wide detection area
- 1-10V output control
- Compatible with 1-10V dimming driver and microwave sensor
- Compact size to suit various luminaires
- Easy to install and various installation methods


Technical Data:

Model No.	SL01A
Control voltage	1~10V
Dimming range	10%~100%
Control range	10~500lux
Control line	red + black -
Operating temperature	-20~+50°C
Viewing angle	90°
Fixing centre D	φ 20mm
Cable length	70cm
Max. permitted cable length	20m
IP rate	IP20
Max. load of the control exit	50mA
ECG Max. control	40



Wiring:

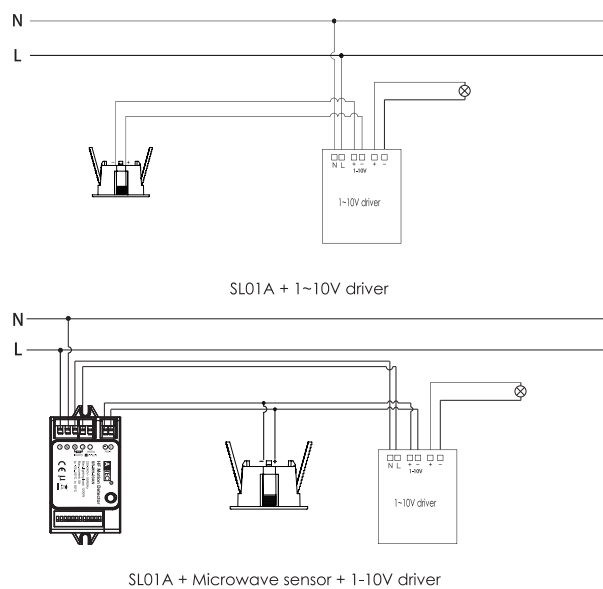

Dimensions(mm):

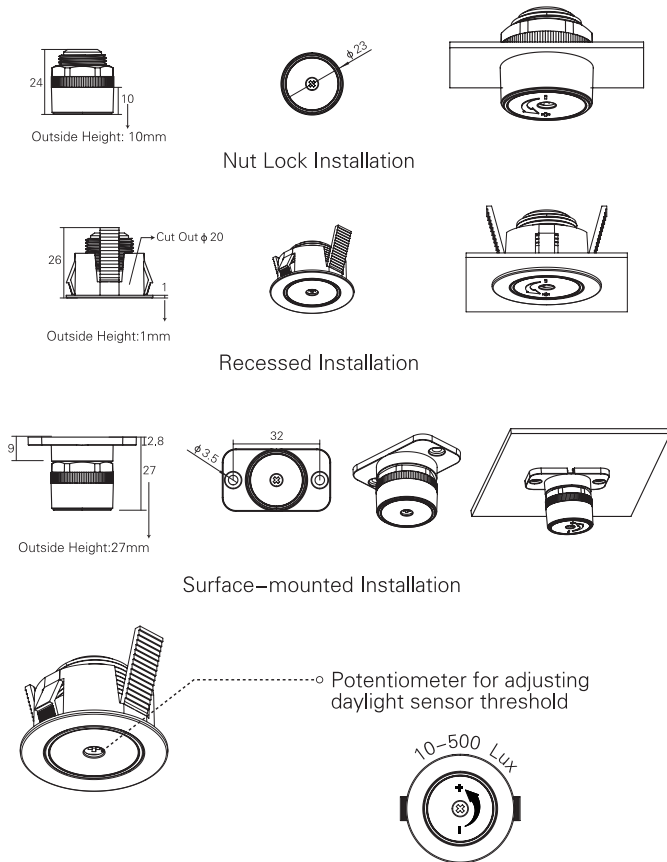

Natural & Controlled light interative diagram:

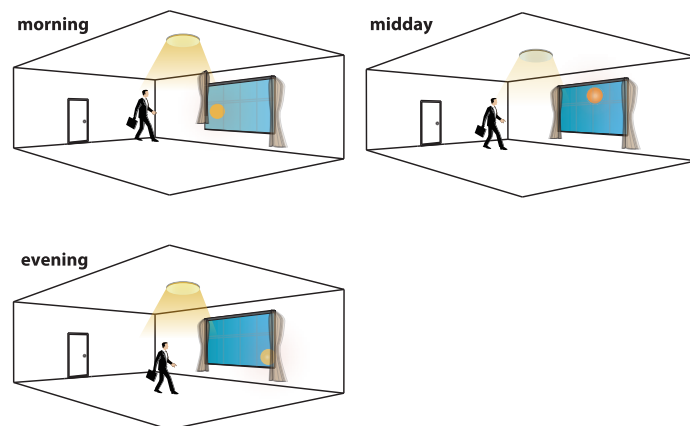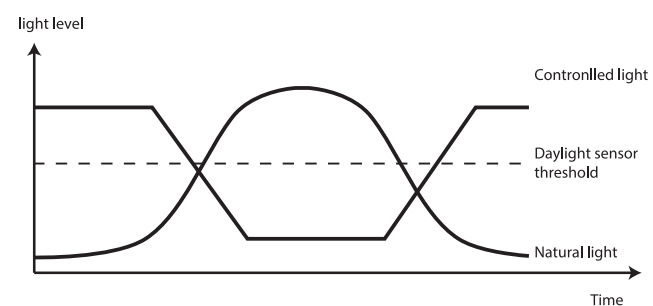

5.02.1.6417_V1.1

1. 印刷：单色印刷
2. 材质：70克双胶纸
3. 说明书折叠步骤、请参考通用图纸（图号WI/J-KF-61188）

修订版次	版次说明	修订日期	审核	设计	名称	说明	材质	见备注	比例	1:1	用量	投影法	⊕	≡	
V1.0	新增	2016.11.28		审核	阮雄杰	2016.12.23	型号	AcTEC, SL01A, 210X297mm, V1.1	颜色		共1张 第1张	单位	MM	版本	V1.1
V1.1	更改版面内容	2016.12.23		工艺			料号	5.02.1.6417							
				批准	郑榕榕	2016.12.23	图号	WI/J-KF-63228							

福州亚得电子有限公司