

LETARON® 广东擎洲光电科技股份有限公司

Letaron Electronic Co., LTD

Address: No. 253, Junma Road, Hengli Town, Dongguan City, Guangdong Province, China

地址: 广东省东莞市横沥镇骏马路 253 号

Tel: +86 769 89110666 Fax: +86 769 87060909

E-Mail: Sales@letaron-group.com Postcode: 523460 Website: www.letaron-group.com

ENGINEERING SPECIFICATION

工程規格書

客戶 / CUSTOMER	:	_____
產品名稱 / ITEM	:	Door control induction switch 8mm sensing head
顏色/Colour	:	Black
客戶編號 / CUSTOMER P/N	:	_____
擎洲样品申请单号/Samples request No	:	_____
擎洲产品型號 / OUR MODEL NO.	:	DOOR120-L / HEKDOOR007
標準 / STANDARD	:	_____
額定 / RATING	:	Input: DC12/24V I _{max} =3A
	:	Output: DC12/24V I _{max} =3A
備注 / REMARKS	:	RoHS STANDARD

根據本公司政策規定,貴司必須於該產品首次生產之前簽回我司規格書的首頁、銘牌共二頁,以確認該產品之規格。

另外,請貴司於下單時在採購單上打上本公司產品編號以及样品单编号,以避免生產錯誤。

如貴司未能如期簽回規格書,我司將無法為該產品安排生產。

為免延誤貴公司之出貨時間,請貴司通力合作。

Based on the policy of our company, all buyers MUST return this product specification sheets along with signature And company chop. Please study very carefully and sign the page of Engineering Specification /Nameplate for product confirmation. And also, please mark our products Model No and Samples request No while the PO issue.

NOTICE: This is very important to have this specification sheets confirmed and return to us on time to avoid any mistake Or delay of delivery. Without your confirmation, Letaron Electronic would not arrange to start the production for your company.

版本 REV.	描述/DESCRIPTION	日期 DATE	制作人 PREPARED BY
00	首次發行/FIRST ISSUE	2022/12/24	彭年

擎洲/LETARON

	制作 Prepared	检查 Checked	核准 Approved
签名 Signature			
日期 Date			

客戶/CUSTOMER

確認
Approved by

日期
Date

(簽字或公司蓋章)
(Signature and company stamp)

LETARON® 广东擎洲光电科技股份有限公司

Letaron Electronic Co., LTD

Address: No. 253, Junma Road, Hengli Town, Dongguan City, Guangdong Province, China

地址: 广东省东莞市横沥镇骏马路 253 号

Tel: +86 769 89110666 Fax: +86 769 87060909

E-Mail: Sales@letaron-group.com Postcode: 523460 Website: www.letaron-group.com

1. Environment(环境):

working temperature of $0^{\circ}\text{C}\sim 45^{\circ}\text{C}$, 10%~90%RH (without dew point);
(工作温度 $0^{\circ}\text{C}\sim 45^{\circ}\text{C}$, 湿度 10%~90%RH (无凝露));

Storage temperature: $-20^{\circ}\text{C}\sim 85^{\circ}\text{C}$, 10%~90%RH (without dew point);
(存储温度 $-20^{\circ}\text{C}\sim 85^{\circ}\text{C}$, 湿度 10%~90%RH (无凝露));

2. Instruction(用法说明):

2-1. Turn off the power connection before installation.(安装前要切断电源).

2-2. Indoor use only. (仅供室内使用).

2-3. Load of the secondary shall not exceed the rated power.(负载不可超过额定功率).

2-4. Installation shall be done by qualified technician.(要有一定专业知识的人才能安装).


2-5. Make sure all the cables connected correctly before turn on the power.

(接通电源前要确定所有的电线连接正确).

2-6. Maximum ambient temperature 45°C , 最大工作环境温度 45°C

3. Externality figure and name plate (外形图):

3-1 外形图

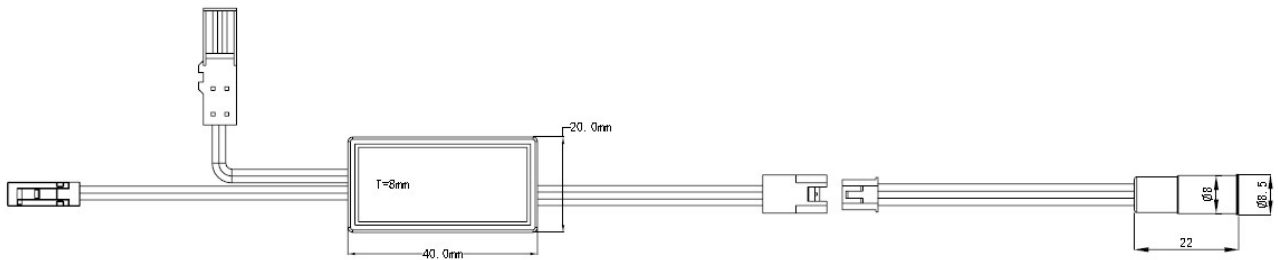

3-2 感应头尺寸



IETARON® 广东擎洲光电科技股份有限公司

Letaron Electronic Co., LTD


Address: No.253, Junma Road, Hengli Town, Dongguan City, Guangdong Province, China

地址: 广东省东莞市横沥镇骏马路 253 号

Tel: +86 769 89110666 Fax: +86 769 87060909

E-Mail: Sales@letaron-group.com Postcode: 523460 Website: www.letaron-group.com

3-3 产品丝印

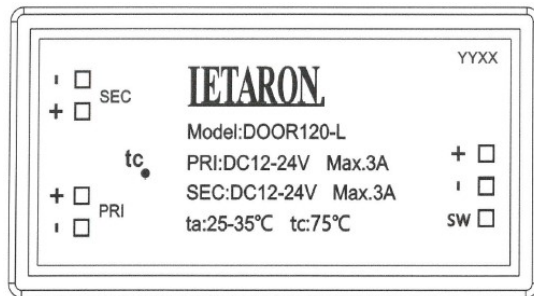

4. Production test specification(生产测试规格):

Item	Test items	Min	Typical value	Max	Remarks
1	Semi-finished product test, standby input current	--	--	3A	DC 12V input
2	Semi-finished product test, standby input current	--	--	3A	DC 24V input
3	Induction mode	Gated sensing			
4	Finished product test, input current	--	--	3A	DC 12V input
5	Finished product test, input current	--	--	3A	DC 24V input
6	Sensing distance test	0-20cm			
7	Lifetime	30000H			
8	Function	The light turns on when powered on, and gradually goes out when the sensor is blocked. The light will light up gradually when the sensor head is not blocked			Output high and low level signals