




SWITCH TO BRIGHTER FUTURE



Product data sheet: IE-45HD

Features

- DALI-2 certified LED driver
- Dimmable with DALI signal
- Independent compact design
- Configurable constant current output via dip-switch
- Switch-Dim function
- Dimming range 1...100%
- Analogue flicker-free dimming
- Protections: opencircuit, shortcircuit, overload, overtemperature
- DC input compatible (176-250V DC)
- SELV equivalent
- Suitable for use in emergency lighting systems
- Protection class II



Applications

- Office
- Shop
- Hospitality
- Public areas

Approbations & Certifications

TUV, CE, CB, DALI-2

Housing properties

- Housing material: plastic, white.
- Type of protection IP20

Electrical Specifications

Type		Unit	IE-45HD						
INPUT	Nominal voltage	V	220 – 240						
	Nominal frequency	Hz	50 / 60						
	AC voltage range	V	198 – 264						
	DC voltage range	V	176 – 250						
	Nominal current	A	0.26						
	THD (Full load)	%	≤ 15						
	Power factor(Full load)		≥0.95						
	Efficiency(Full load)	%	87						
	No load	W	≤ 0.5						
	Standby power	W	≤0.5						
	Protection class		II						
	Inrush current(Cold start)	A pk	55(th =300 μs)						
Max. units per circuit breaker		B10:3 B13:4 B16:5 B20:6 C10:6 C13:8 C16:10 C20:13							
OUTPUT	Nominal voltage range	V	14-43	14-39	14-38	14-35	14-32	14-30	14-28
	Maximum voltage(Open Circuit)	Vdc	≤ 55						
	Nominal current	A	1.05	1.15	1.2	1.3	1.4	1.5	1.6
	Voltage accuracy	%	± 5						
	Current ripple(≤120Hz)	%	≤ 44						
	Pst LM		≤ 1						
	SVM		≤ 0.4						
	Nominal power range	W	0 - 45						
	Maximum power	W	45						
	Galvanic isolation		SELV						
ENVIRONMENT	Ambient temperature range ta	°C	-20 ...+50						
	Maximum case temperature tc	°C	85						
	Max. Case temp. In fault condition	°C	110						
	Storage temperature range	°C	-20 ...+70						
	Relative humidity	%	5 ... 85(Not condensing)						
	Surge transient protection	kV	1 2 (L/N LN/PE acc to. EN 61547 Clause 5.7)						
	Environmental rating		Indoor						
	IP rating		IP 20						
	Mains switching cycles		> 100,000						
	Expected lifetime	h	50,000 (0.2% / 1'000 h failure rate)						

*All parameters NOT specially mentioned are measured at 230VAC input ,rated current and 25°C of ambient temperature

Protections

Overtemperature

Yes

Overload

Yes

No load

Yes

Short-circuit

Yes



Input overvoltage

Maximum allowed input voltage 264VAC


Output overvoltage

Yes


OUTPUT LOAD vs TEMPERATURE

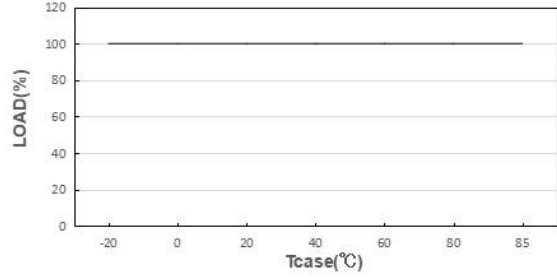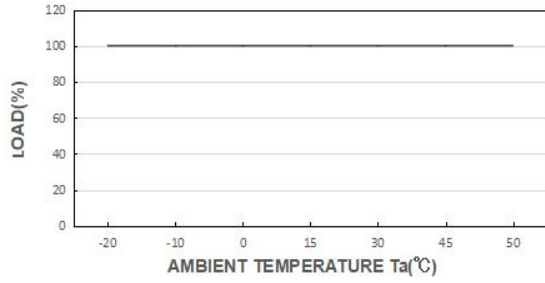


STATIC CHARACTERISTIC

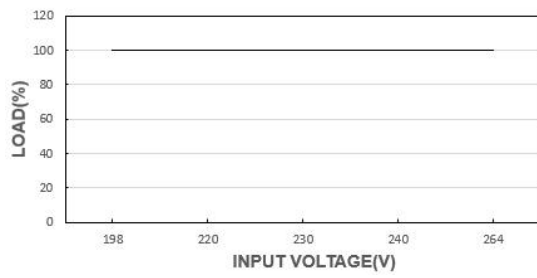


POWER FACTOR (PF) CHARACTERISTIC

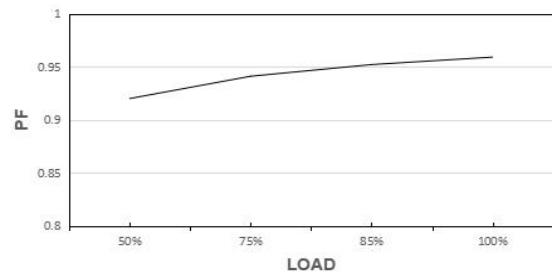


TOTAL HARMONIC DISTORTION (THD)

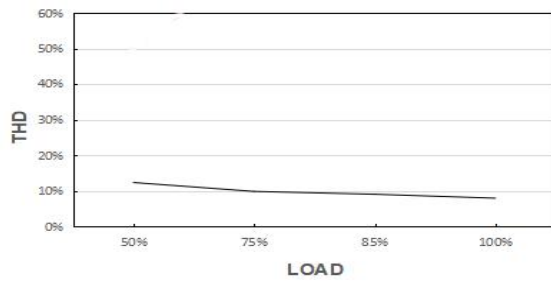

EFFICIENCY vs LOAD

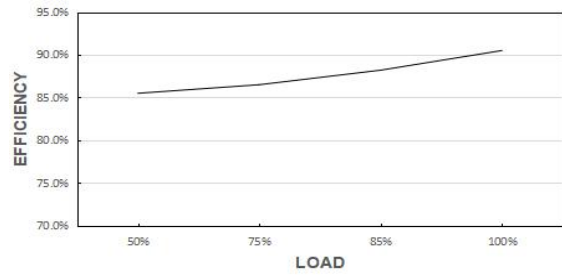


LIFE TIME

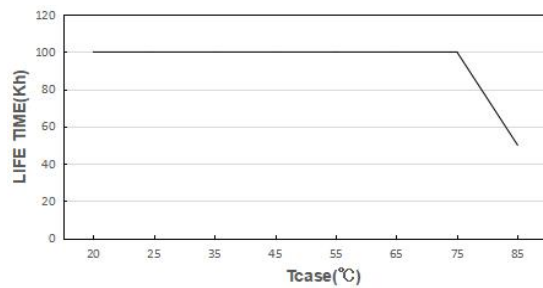

*The graph is for reference only, and the detailed values refer to the parameter table

Wiring Diagram

Terminal:	Push button
Max. cable length – DALI system:	300 m
Dimensions(LxWxH):	135 x 72 x 24 mm
Mounting hole spacing :	N/A
Weight:	165 ± 5 g

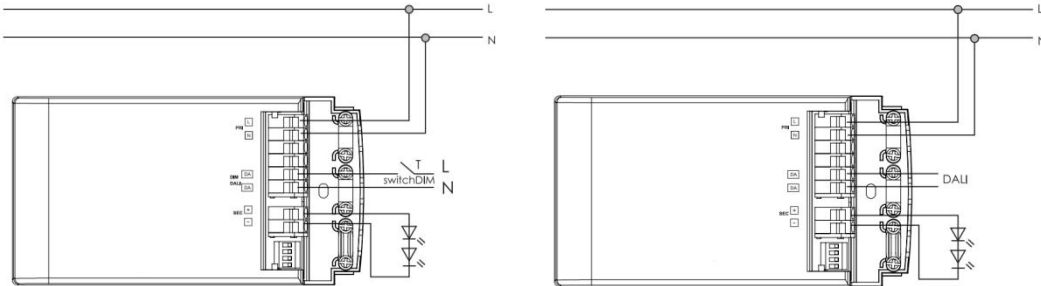

PRI

Cable cross-section:	0.5-2.5□
Stripping:	8mm

SEC

Cable cross-section:	0.5-2.5□
Stripping:	8mm

Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs.

Remarks

-Touch current: lower than 0.7mA, according to EN60598-1 annex G and EN61347-1 annex A

Standards

EN 61347-1
EN 61347-2-13
EN 62384
EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61547
EN 60598-1
EN 62386-101
EN 62386-102
EN 62386-207
IEE1789
(EU) 2019/2020

Manufacturer's address:

No.4, Tongfu Road, Tong'an Industrial Center, Tong'an District, Xiamen, Fujian, China

www.actec.com