




Saves Your Energy

PRODUCT CARD

6.11.2015

NAC31S.W

Name:	Coupler White (1, PE, N)
Type:	NAC31S.W
GTIN:	6418677109003
Description:	For flexible, stranded and solid wires with cross-section 0,75-4,0 mm ² . Strain-relief for cables with outer diameter of 5,5-12,0 mm.
Package:	200/10400
Unit:	PCS

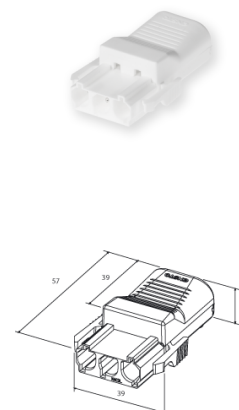

Technical specification

UL Wire range 12 ... 18 AWG

Ratings

Rated voltage 250 V

Degree of protection IP20

Rated current 20 A

Dimensions

Dimensions l x w x h 57x39x20

Conductor cross-section 0,75 - 4 mm²

Temperatures

Max. operating temperature +70 °C

Min. installation temperature +5 °C

Min. operating temperature -30 °C (without mechanical stress)

Features

Pole markings 1,PE,N

Materials

Material Polyamide 66

Colors

Color White

Drawing markings

L 250 mm

US specific

UL Rated voltage 250 V

UL Rated current 16 A

Ensto Finland Oy

Ensio Miettisen katu 2
P.O.Box 77
06101 Porvoo, Finland

Tel. +358 204 76 21
Fax +358 204 76 2750

www.ensto.com