


# CC DIP Switch Series


SLT20-500IL-UN(for independent use)

SLT20-500IB-UN(for build-in use)


Best seller

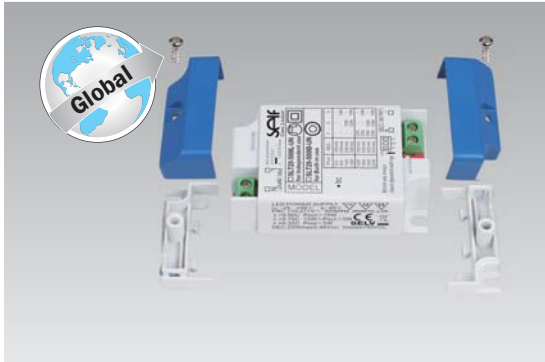

Dimensions: (mm)

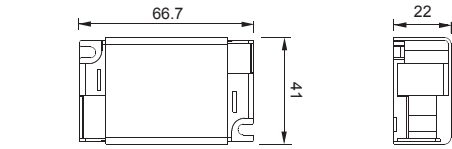

SLT20-500IB-UN

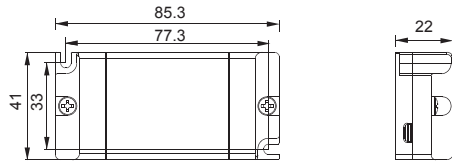

SLT20-500IL-UN



- Multipower driver supplied with dip-switch for the selection of the output current.
- Class II protection against electric shock for direct or indirect contact
- Driver for built-in or independent use.
- It can be used for lighting equipment in protection class I and II
- Active Power Factor Corrector.
- Free flicker design
- SELV output(<60V)
- Current regulation  $\pm 5\%$  including temperature variations.
- Fast start-up time  $\leq 0.5S$
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- Efficiency: 85.0%(AC230V, full load)
- Guarantee: 5 Years

SLT20-500IL-UN  
SLT20-500IB-UN\*

DIP switch

Pout	SEC	3	2	1
6W	150mA	-	-	-
8W	200mA	-	-	ON
10W	250mA	-	ON	-
12W	300mA	-	ON	ON
14W	350mA	ON	-	-
16W	400mA	ON	-	ON
18W	450mA	ON	ON	-
20W	500mA	ON	ON	ON

## Specifications

Model	Rated input	PF	Output	Output Power range	Output voltage range	Tolerance	Efficiency	ta	tc	Size	Approval
	AC110-277V	0.70C	150mA	0.75-6W	5-40V	+/-5%	85.0%	50 C	85 C	66.7x41x22mm 85.3x41x22mm	SELV US pending
	AC110-277V	0.70C	200mA	1-8W	5-40V	+/-5%	85.0%	50 C	85 C	66.7x41x22mm 85.3x41x22mm	SELV US pending
	AC110-277V	0.70C	250mA	1.25-10W	5-40V	+/-5%	85.0%	50 C	85 C	66.7x41x22mm 85.3x41x22mm	SELV US pending
SLT20-500IB-UN	AC110-277V	0.70C	300mA	1.5-12W	5-40V	+/-5%	85.0%	50 C	85 C	66.7x41x22mm 85.3x41x22mm	SELV US pending
SLT20-500IL-UN*	AC110-277V	0.70C	350mA	1.75-14W	5-40V	+/-5%	85.0%	50 C	85 C	66.7x41x22mm 85.3x41x22mm	SELV US pending
	AC110-277V	0.90C	400mA	2-16W	5-40V	+/-5%	85.0%	50 C	85 C	66.7x41x22mm 85.3x41x22mm	SELV US pending
	AC110-277V	0.90C	450mA	2.25-18W	5-40V	+/-5%	85.0%	50 C	85 C	66.7x41x22mm 85.3x41x22mm	SELV US pending
	AC110-277V	0.90C	500mA	2.5-20W	5-40V	+/-5%	85.0%	50 C	85 C	66.7x41x22mm 85.3x41x22mm	SELV US pending

\*For product datasheet go to [www.self-ecg.com](http://www.self-ecg.com) or available on request.