




SWITCH TO BRIGHTER FUTURE

Product data sheet: IEM-25D TW

Features

- Dimmable independent constant current 2-channel LED driver with DALI DT8
- Analogue flicker-free
- DALI-2 certified
- Configurable constant current output via dip-switch
- Switch-Dim function
- SwitchDIM and colourSWITCH with memory function
- ColourSWITCH with predefined colours
- Dimming range 2...100%
- Push wire connections
- Protections: opencircuit, shortcircuit, overload, overtemperature
- DC input compatible (176-250V DC)
- SELV equivalent
- Suitable for use in emergency lighting systems
- Suitable for protection class II luminaires
- Protection class II

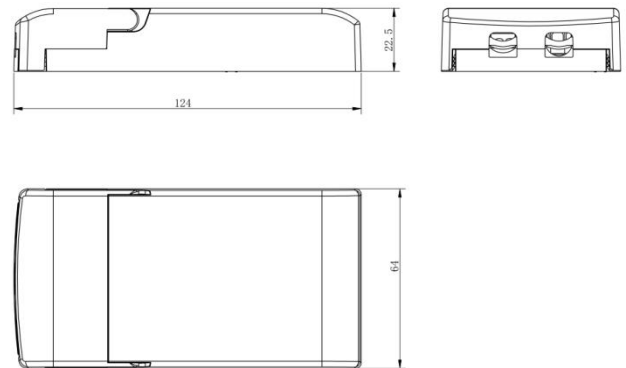

Applications

- Office
- Shop
- Hospitality
- Public areas

Approbations & Certifications

TUV,CE,CB,DALI-2

Housing properties

- Housing material: plastic, white.
- Type of protection IP20

Electrical Specifications

Type		Unit	IEM-25D TW							
INPUT	Nominal voltage	V	220 – 240							
	Nominal frequency	Hz	0 / 50 / 60							
	AC voltage range	V	198 – 264							
	DC voltage range	V	176-250							
	Nominal current	A	0.16							
	THD (Full load)	%	≤15							
	Power factor (Full load)		0.95							
	Efficiency (Full load)	%	83							
	No load	W	≤0.5							
	Protection class		II							
	Inrush current(Cold start)	A pk	15(th = 100 μs)							
	Max.units per circuit breaker		B10: 46 B13: 60 B16: 74 B20: 93 C10: 62 C13: 81 C16: 100 C20: 125							
OUTPUT	Nominal voltage range	V	10-50	10-50	10-50	10-50	10-50	10-45	10-42	10-36
	Maximum voltage(Open Circuit)	Vdc	≤ 59							
	Nominal current	mA	260	350	400	450	500	550	600	700
	Current accuracy	%	+/- 5							
	Current ripple 100Hz	%	≤ 20							
	Pst LM		≤ 1							
	SVM		≤ 0.4							
	Nominal power range	W	2.6-13	3.5-17.5	4-20	4.5-22.5	5-25	5.5-25	6-25	7-25
	Maximum power	W	25							
	Galvanic isolation		SELV							
ENVIRONMENT	Ambient temperature range ta	°C	-20 ...+45							
	Maximum case temperature tc	°C	90							
	Max. Case temp. In fault condition	°C	110							
	Storage temperature range	°C	-20 ...+70							
	Relative humidity	%	5 ... 85 (Not condensing)							
	Surge transient protection	kV	1 2 (L/N LN/PE acc to. EN 61547 Clause 5.7)							
	Environmental rating		Indoor							
	IP rating		IP 20							
	Mains switching cycles		> 100,000							
	Expected lifetime	h	50,000 (0.2% / 1'000 h failure rate)							

*All parameters NOT specially mentioned are measured at 230VAC input ,rated current and 25°C of ambient temperature

Protections

Over temperature

Yes

Over load

Yes

No load

Yes

Short-circuit

Yes



Input overvoltage

Maximum allowed input voltage 264V AC


Output overvoltage

Yes, Limitation of Output voltage < 59V


OUTPUT LOAD vs TEMPERATURE

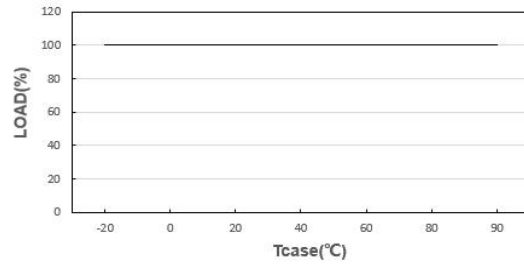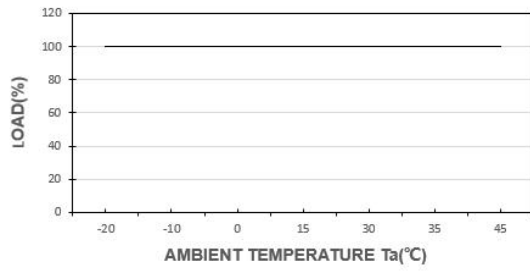


STATIC CHARACTERISTIC

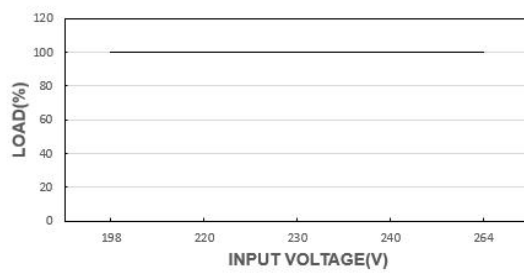


POWER FACTOR (PF) CHARACTERISTIC

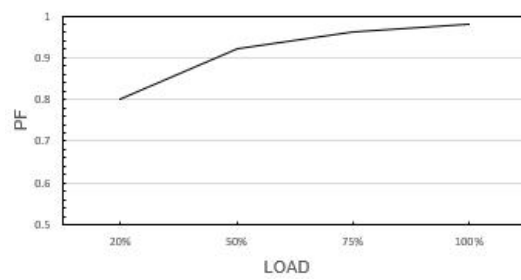


TOTAL HARMONIC DISTORTION (THD)

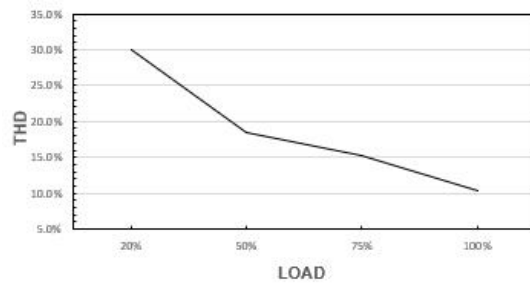

EFFICIENCY vs LOAD

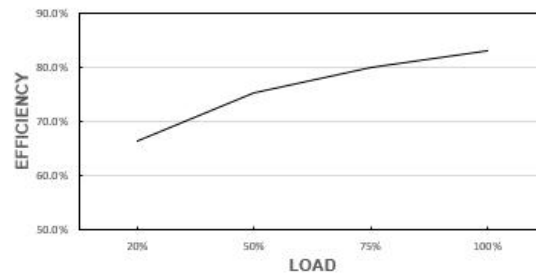


LIFE TIME

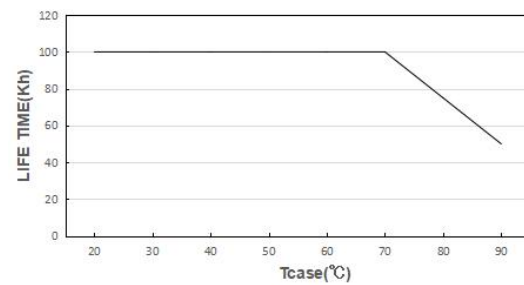

*The graph is for reference only, and the detailed values refer to the parameter table

Wiring Diagram

Terminal:	Push in terminals
Max. cable length – DALI system:	300 m
Dimensions(LxWxH):	124 x 64 x 22.5 mm
Weight:	140 ± 10 g

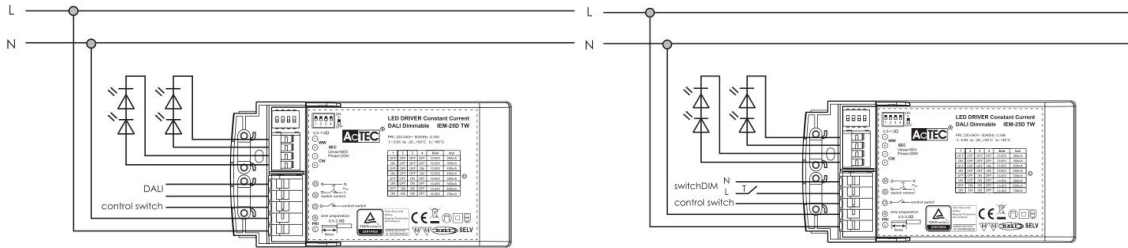

PRI

Cable cross-section:	0.75-2.5
Stripping:	8mm

SEC

Cable cross-section:	0.5-1.5
Stripping:	8mm

Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs.

Remarks

-**Touch current:** lower than 0.7 mA, according to EN 60598-1 annex. G and EN 61347-1 annex A

Standards

EN 61347-1
EN 61347-2-13
EN 62384
EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61547
EN 60598-1
EN 62386-101
EN 62386-102
EN 62386-207
EN 62386-209
IEE1789
(EU) 2019/2020

Manufacturer's address:

No.4, Tongfu Road, Tong'an Industrial Center, Tong'an District, Xiamen, Fujian, China

www.actec.com