


## CC Version Super thin LED Power Supply



Dimensions: (mm/inches):

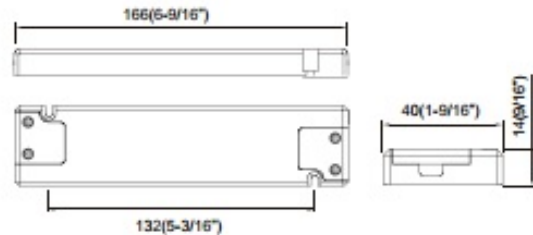

### ■ Features

- Independent power supply for constant current LED lamp
- Special design screw terminal for field connection
- Mini DC socket at the secondary side for quick connection
- Class II protection against electric shock from direct and indirect contact
- SELV output
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- Efficiency  $\geq 83\%$  (AC230V, full load)

**Super thin 14mm**  
Thickness only

### ■ Standards

EN 61347-1  
EN 61347-2-13  
EN 55015  
EN 61000-3-2  
EN 61000-3-3  
EN 61547



**NEW** direct plug-in feature!

### ■ Characteristics

Rated input voltage: AC220-240V 50/60Hz ( power factor measured at AC230V and full load)

Model No.	Constant output current	Output voltage range	$\lambda$	$t_a$	$t_c$	L x W x H	Approval
SLT20-350IFG SLT20-350IFG(DC)★	350mA	6-56V	0.50C	-20-50°C (-4-122°F)	85°C (185°F)	166x40x14mm (6-9/16"x1-9/16"x9/16")	SEMKO
SLT20-500IFG SLT20-500IFG(DC)★	500mA	6-40V	0.50C	-20-50°C (-4-122°F)	85°C (185°F)	166x40x14mm (6-9/16"x1-9/16"x9/16")	SEMKO
SLT20-700IFG SLT20-700IFG(DC)★	700mA	6-29V	0.50C	-20-50°C (-4-122°F)	85°C (185°F)	166x40x14mm (6-9/16"x1-9/16"x9/16")	SEMKO

★ Additional DC Socket output for Model No.with Suffix-DC