




Dimensions:(mm/inches)

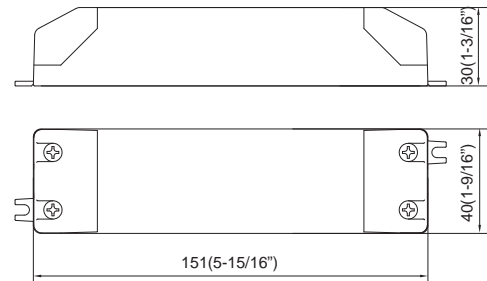

■ Features

- Independent power supply for constant voltage LED lamp
- Terminal block for quick connection
- Class II protection against electric shock from direct and indirect contact
- SELV output
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- No load power consumption ≤ 0.3W
- Efficiency ≥ 85% (AC230V, full load)

■ Standards

- EN 61347-1
- EN 61347-2-13
- EN 55015
- EN 61000-3-2
- EN 61000-3-3
- EN 61547

■ Characteristics

Rated input voltage: AC220-240V 50/60Hz (power factor measured at AC230V and full load)

Model No.	Constant output voltage	Load	λ	t_a	t_c	L x W x H	Approval
SLT30-12VLE-E	DC12V	0-30W	0.95	-20-45°C (-4-113°F)	85°C (185°F)	151x40x30mm (5-15/16"x1-9/16"x1-3/16")	SEMKO pending
SLT30-24VLE-E	DC24V	0-30W	0.95	-20-45°C (-4-113°F)	85°C (185°F)	151x40x30mm (5-15/16"x1-9/16"x1-3/16")	SEMKO pending
SLT30-48VLE-E	DC48V	0-30W	0.95	-20-45°C (-4-113°F)	85°C (185°F)	151x40x30mm (5-15/16"x1-9/16"x1-3/16")	SEMKO pending