

Led driver control

Interface for 0-1/10V drivers



TOP-0110/ONE

230 V
input


0-1/10V
Output



Control unit with dimmer function for Led driver with input 0-1/10V. 230Vac power supply. 1 output, max power 2000W (integrated relay).
Radio receiver 433.92MHz. 1 wired input.
Integrated WiFi module for remote control by App OneSmart and voice command.

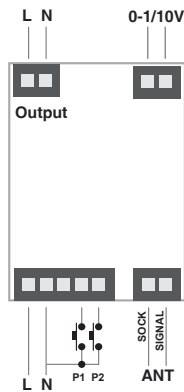

Code	TOP-0110/ONE
Power supply	Da rete 110-240 Vac
Output	Settable 0-10V or 1-10V 230Vac relay Max 2000W
Function	Dimmer
Programmable parameters	Timer On, Fade On, Fade Off, Last intensity value memory, Minimum intensity value
Input	1 NO push buttons
No. Programmable transmitters	30
Radio frequency	433.920 MHz ISM
Wireless Smart	WiFi 2,4GHz
Smart remote control	App OneSmart
Voice commands	Google Home, Alexa Amazon
Protection rating	IP20
Working temperature	-20 +55 °C
Dimensions	174x46x35 mm

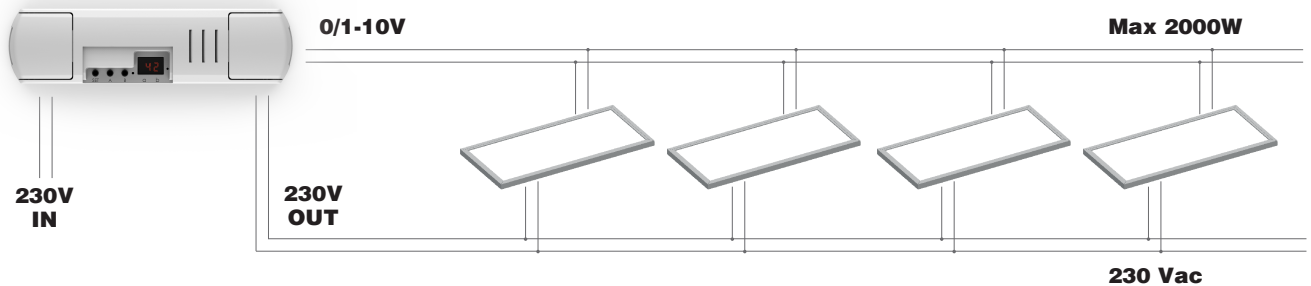

TOP LINEA

