

Constant voltage LED Control

Dimmer Led 12-24Vdc

TOP-V8/4

12-24
Vdc
input


4 LEDs
12-24
Output

Dimmer

Wired

Radio RF

Control unit with dimmer function for LEDs with constant voltage. 12 to 36Vdc power supply. Four outputs, max 8A per output and max 24A in total. Radio receiver 433.92MHz. Three wired inputs. Output for power extender.

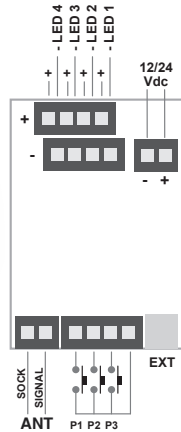

Code	TOP-V8/4
Power supply	12-36Vdc
Output	4 x Led 12-24 Vdc Max power / output: 8A (96W with 12V, 192W with 24V) Max total power: 24A (288W with 12V, 576W with 24V)
Function	Dimmer
Input	3 NO push buttons P1: On-Off/Dimmer output 1 P2: On-Off/Dimmer output 2 P3: On-Off/Dimmer output 3
Programmable parameters	Timer On, Fade On, Fade Off, Last intensity value memory, Minimum intensity value.
No. Programmable transmitters	30
Radio frequency	433.920Mhz ISM
Protection rating	IP20
Working temperature	-20 +55 °C
Dimensions	174x46x35

TOP LINEA

