



Catalogue **LED TECHNOLOGY**
 Line **Electronic Led Power Supplies**
 FAmily **LED power supplies constant voltage**
 Subfamily **Led Power Supplies 12Vdc**

Picture	Article	Description	Lot	Price/Unit
	G5030004A		1	6,14 €
	Led Power Supply CV Mini IP65 12V 4W		5	5,11 €
	ECO ERP Design. 12Vdc constant voltage output.		10	4,64 €
	Wiring 18cm UL1007 18AWG		50	4,34 €
	Length (mm): 53 Width (mm): 27 High (mm): 21 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 0~0.33 Frecuency (Hz): 50~60 Power (W): 4 Room Temperature (°C): -20~+60 Critical Temperature (°C): 90 Life (Hours): 30000 Ingress Protection: IP65 Dimmable: NO Power factor: 0.55			




LED TECHNOLOGY > Electronic Led Power Supplies > LED power supplies constant voltage

Subfamily **Led Power Supplies 12Vdc**

Picture	Article	Description	Lot	Price/Unit
	G503504A		1	6,29 €
	Led Power Supply CV CC AED04-350ILS 12Vdc 350mA 4W		10	5,24 €
			50	4,76 €
			200	4,45 €
	ECO Design ERP Compliant. 12Vdc constant voltage LED power supply or 350mA constant current depending on load			
	Length (mm): 51,5 Width (mm): 33 High (mm): 17 Colour: White Voltage In (Vac): 100~240 Voltage Out (Vdc): 3~12 Intensidad Out (A): 0.3 Frecuency (Hz): 50~60 Power (W): 1.05~4.2 Room Temperature (°C): -10~+45 Critical Temperature (°C): 80 Life (Hours): 30000 Ingress Protection: IP20 Dimmable: NO Power factor: 0.5			




	G5030006		1	7,90 €
	Led Power Supply CV UT 12V 6W		10	6,60 €
			50	5,99 €
			100	5,60 €
	ECO Design ERP Compliant. Extra-flat. 12Vdc constant voltage output			
	Length (mm): 98 Width (mm): 46 High (mm): 11 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad In (A): 0.07 Intensidad Out (A): 0~0.5 Frecuency (Hz): 50~60 Power (W): 0~6 Room Temperature (°C): -20~+50 Critical Temperature (°C): 80 Life (Hours): 30000 Ingress Protection: IP20 Dimmable: NO Power factor: 0,55			




LED TECHNOLOGY > Electronic Led Power Supplies > LED power supplies constant voltage

Subfamily **Led Power Supplies 12Vdc**

Picture	Article	Description	Lot	Price/Unit
	G503706C		1	17,00 €
	Led Power Supply CV CC 700mA (12Vdc) 6W		5	14,16 €
	Power supply in voltage 12VDC and constant current 700mA according to identified load		10	12,88 €
			50	12,04 €
	Length (mm): 42,5 Width (mm): 41 High (mm): 21 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 0.7 Frecuency (Hz): 50~60 Power (W): 0~6 Room Temperature (°C): -20~+50 Critical Temperature (°C): 85 Ingress Protection: IP20 Dimmable: NO Power factor: 0.6 Reference: 401244			




	G503706H		1	10,24 €
	LED Power Supply CV CC SLT6-700ISC-UN 700mA (12Vdc) 6W		5	8,54 €
	Constant voltage 12VDC and constant current 700mA as identified by the load. Voltage range 120-240 / 12VDC. Class II. Power factor: 0.90 @ 120V		20	7,76 €
			200	7,25 €
	Length (mm): 52 Width (mm): 30 High (mm): 23 Colour: White Voltage In (Vac): 100~240 Voltage Out (Vdc): 2.7~9 Intensidad Out (A): 0.7 Frecuency (Hz): 50~60 Power (W): 2~6.3 Room Temperature (°C): -20~+45 Critical Temperature (°C): 90 Ingress Protection: IP66 Power factor: 0.80			



LED TECHNOLOGY > Electronic Led Power Supplies > LED power supplies constant voltage


Subfamily **Led Power Supplies 12Vdc**

Picture	Article	Description	Lot	Price/Unit
	G503706J		1	11,10 €
	LED power supply CV CC SLT6-700IL-4 700mA (12Vdc) 6W		5	9,26 €
			10	8,41 €
			50	7,80 €

ECO design according to ERP directives. Led Power supply voltage 12VDC or constant current 700mA depending on load

Length (mm): 68 Width (mm): 35 High (mm): 20
 Colour: White Voltage In (Vac): 100~240
 Voltage Out (Vdc): 3~8.4 Intensidad Out (A): 0~0.7
 Frequency (Hz): 50~60 Power (W): 6
 Room Temperature (°C): -20~+40
 Critical Temperature (°C): 70 Life (Hours): 50000
 Ingress Protection: IP20 Dimmable: NO
 Power factor: 0,40



	G5035081B		1	8,45 €
	Led Power Supply CV CC AED08-700ILS 12Vdc 700mA 8 W		10	7,05 €
			50	6,40 €
			200	5,98 €


ECO Design ERP Compliant. 12Vdc constant voltage LED power supply or 700mA constant current depending on load.

Length (mm): 79,5 Width (mm): 39 High (mm): 19
 Colour: White Voltage In (Vac): 100~240
 Voltage Out (Vdc): 6~11 Intensidad Out (A): 0,625
 Frequency (Hz): 50~60 Power (W): 4.2~7.7
 Room Temperature (°C): -10~+45
 Critical Temperature (°C): 80 Life (Hours): 30000
 Ingress Protection: IP20 Dimmable: NO
 Power factor: 0.5




LED TECHNOLOGY > Electronic Led Power Supplies > LED power supplies constant voltage

Subfamily **Led Power Supplies 12Vdc**

Picture	Article	Description	Lot	Price/Unit
	G5030012B		1	8,06 €
	Led Power Suply CV Mini IP65 12V 12W		5	7,28 €
	ECO ERP Design. 12Vdc constant voltage output. Input and output wiring with 20cm cable.		10	6,63 €
			50	6,11 €
	Length (mm): 50 Width (mm): 48 High (mm): 24 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 0~1 Frecuency (Hz): 50~60 Power (W): 12 Room Temperature (°C): -20~+50 Critical Temperature (°C): 80 Life (Hours): 30000 Ingress Protection: IP65 Dimmable: NO Power factor: 0,9			









	A413650		1	15,81 €
	Led power supply MINILED CV 10V-15W RN1365		10	14,43 €
	Constant tension .IP20. Class II Tension input 90-264V / output 10VDC		20	13,39 €
	Length (mm): 123 Width (mm): 38 High (mm): 28 Colour: Blue Voltage In (Vac): 230~240 Voltage Out (Vdc): 10 Frecuency (Hz): 50~60 Power (W): 15 Room Temperature (°C): +40 Critical Temperature (°C): 85			



LED TECHNOLOGY > Electronic Led Power Supplies > LED power supplies constant voltage


Subfamily **Led Power Supplies 12Vdc**

Picture	Article	Description	Lot	Price/Unit
	G5030015		1	7,66 €
	LED Power Supply CV SLT15-12VF-2s 12V 15W		5	6,38 €
	Ultra flat 12mm. 12Vdc constant voltage output.		10	5,81 €
	Efficiency 83%		100	5,42 €
	Length (mm): 121 Width (mm): 45 High (mm): 16 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 0~1.25 Frecuency (Hz): 50~60 Power (W): 0~15 Room Temperature (°C): -20~+45 Critical Temperature (°C): 80 Ingress Protection: IP20 Dimmable: NO Power factor: 0.7			
				

	G5030015A		1	11,19 €
	LED Power Supply CV SLT15-12VFG 12V 15W		5	9,33 €
	Ultra flat 12mm. 12Vdc constant voltage output.		10	8,49 €
	Efficiency 81.5%		100	7,93 €
	Length (mm): 138 Width (mm): 40 High (mm): 12 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 0~1.25 Frecuency (Hz): 50~60 Power (W): 0~15 Room Temperature (°C): -20~+50 Critical Temperature (°C): 85 Ingress Protection: IP20 Dimmable: NO Power factor: 0,5			
				


LED TECHNOLOGY > Electronic Led Power Supplies > LED power supplies constant voltage

Subfamily **Led Power Supplies 12Vdc**

Picture	Article	Description	Lot	Price/Unit
	G5030015C		1	9,57 €
	Led Power Supply CV AED15-12VLSTB-IP44 12V 15W		5	7,94 €
			10	7,22 €
			100	6,72 €
	ECO ERP design Constant voltage output 12Vdc			
	Length (mm): 145 Width (mm): 41 High (mm): 13,5 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 1,25 Frecuency (Hz): 50~60 Power (W): 15 Room Temperature (°C): -20~+40 Critical Temperature (°C): 80 Life (Hours): 30000 Ingress Protection: IP44 Dimmable: NO			

LETARON




	G5030015D		1	11,05 €
	LED Power Supply CV SLT15-12VF-2S 12V 15W		5	9,20 €
			10	8,37 €
			50	7,75 €
	Ultra flat 16mm. Constant voltage output 12Vdc. Class II.			
	Length (mm): 108 Width (mm): 41 High (mm): 16 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vac): 12 Intensidad Out (A): 0~1.25 Frecuency (Hz): 50~60 Power (W): 15 Room Temperature (°C): -20~+45 Critical Temperature (°C): 90 Life (Hours): 30000 Ingress Protection: IP20 Dimmable: NO Power factor: 0.85			

SAIF




LED TECHNOLOGY > Electronic Led Power Supplies > LED power supplies constant voltage

Subfamily **Led Power Supplies 12Vdc**

Picture	Article	Description	Lot	Price/Unit
	G503015D	Led Power Supply CV SUPERTHIN 12V 15W	1	11,44 €
			10	9,53 €
			100	8,67 €
		Constant voltage 220-240 / 12VDC.	200	8,09 €
		Length (mm): 103 Width (mm): 35 High (mm): 16 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 1.25 Frecuency (Hz): 50~60 Power (W): 0~15 Room Temperature (°C): -20~+45 Critical Temperature (°C): 80 Life (Hours): 50000 Ingress Protection: IP20 Dimmable: NO Power factor: 0.75 Reference: 401498		




	G5030020A	Led Power Supply CV AED20-12VLSTB-IP44 12V 20W	1	12,68 €
			5	10,56 €
			10	9,61 €
		ECO Design ERP. 12Vdc constant voltage output	100	8,97 €
		Length (mm): 145 Width (mm): 41 High (mm): 13,5 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 1,67 Frecuency (Hz): 50~60 Power (W): 0~20 Room Temperature (°C): -20~+40 Critical Temperature (°C): 80 Life (Hours): 30000 Ingress Protection: IP44 Dimmable: NO Power factor: 0.9		




LED TECHNOLOGY > Electronic Led Power Supplies > LED power supplies constant voltage

Subfamily **Led Power Supplies 12Vdc**

Picture	Article	Description	Lot	Price/Unit
	G503021		1	11,19 €
		LED Power Supply CV SLT20-12VFG 12V 20W	5	9,33 €
		Ultra-flat 14mm. 12Vdc constant voltage output.	10	8,49 €
		Efficiency 84.1%	50	7,93 €
		Length (mm): 166 Width (mm): 40 High (mm): 14 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 0~1.66 Frecuency (Hz): 50~60 Power (W): 0~20 Room Temperature (°C): -20~+50 Critical Temperature (°C): 75 Ingress Protection: IP20 Dimmable: NO Power factor: 0.50		




	G503021B		1	17,77 €
		LED power supply CV FLAT 12V 20W	5	16,16 €
		Constant voltage Class II. Extra flat	10	14,69 €
			50	13,73 €
		Length (mm): 154 Width (mm): 50 High (mm): 14 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 0~1.66 Frecuency (Hz): 50~60 Power (W): 0~20 Critical Temperature (°C): 80 Ingress Protection: IP20 Dimmable: NO Power factor: 0.5		




LED TECHNOLOGY > Electronic Led Power Supplies > LED power supplies constant voltage

Subfamily **Led Power Supplies 12Vdc**

Picture	Article	Description	Lot	Price/Unit
	G503021C	Led Power Supply CV SLT20-12VF-2S 12V 20W	1	14,89 €
			5	12,40 €
			10	11,27 €
			50	10,44 €
	ECO design according to ERP directives. Ultra flat 16mm. 12Vdc constant voltage output. Full load efficiency >82%			
	Length (mm): 121 Width (mm): 45 High (mm): 16 Colour: Grey Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 0~1.67 Frecuency (Hz): 50~60 Power (W): 0~20 Room Temperature (°C): -20~+45 Critical Temperature (°C): 90 Life (Hours): 30000 Ingress Protection: IP20 Dimmable: NO Power factor: 0.85			




	G5030030E	Led Power Supply CV AED30-12VLTSTB-IP44 12V 30W	1	13,56 €
			5	11,30 €
			10	10,27 €
			100	9,59 €
	ECO Design ERP. 12Vdc constant voltage output			
	Length (mm): 171 Width (mm): 54 High (mm): 16 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 2.5 Frecuency (Hz): 50~60 Power (W): 0~30 Room Temperature (°C): +40 Critical Temperature (°C): 80 Ingress Protection: IP44 Dimmable: NO Power factor: 0.9			




LED TECHNOLOGY > Electronic Led Power Supplies > LED power supplies constant voltage

Subfamily **Led Power Supplies 12Vdc**

Picture	Article	Description	Lot	Price/Unit
	G5030030G		1	15,57 €
	Led power supply CV AED30-12VIP44-3A 12V 30W cable and relay		5	12,97 €
			10	11,79 €
			100	11,02 €
	ECO ERP Design. Constant voltage output 12Vdc. Cabling. Built-in relay			
	Length (mm): 145 Width (mm): 55 High (mm): 16,5 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 2.5 Frecuency (Hz): 50~60 Power (W): 0~30 Room Temperature (°C): -20~+40 Critical Temperature (°C): 80 Life (Hours): 30000 Ingress Protection: IP44 Power factor: 0,9			

LETARON




	G5030030H		1	14,11 €
	Led power supply CV AED30-12VIP44-3B 12V 30W wired		5	11,75 €
			10	10,69 €
			100	9,98 €
	ECO ERP Design. Constant voltage output 12Vdc. Cabling.			
	Length (mm): 145 Width (mm): 55 High (mm): 16,5 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 2.5 Frecuency (Hz): 50~60 Power (W): 0~30 Room Temperature (°C): -20~+40 Critical Temperature (°C): 80 Life (Hours): 30000 Ingress Protection: IP44 Power factor: 0.9			

LETARON




LED TECHNOLOGY > Electronic Led Power Supplies > LED power supplies constant voltage

Subfamily **Led Power Supplies 12Vdc**




Picture	Article	Description	Lot	Price/Unit
	G503030B		1	29,02 €
	LED power supply CV FLAT 12V 30W		5	26,38 €
	Extra-flat. Constant voltage 220-240 / 12VDC. Class II		10	23,99 €
			50	22,41 €
	Length (mm): 123 Width (mm): 45 High (mm): 19 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 0~2.5 Frecuency (Hz): 50~60 Power (W): 0~30 Critical Temperature (°C): 80 Ingress Protection: IP20 Dimmable: NO Power factor: 0.9 Reference: 401292			






	G503030D		1	14,56 €
	Driver LED CV SLT30-12VLG-E 12V 30W		5	12,13 €
	Constant voltage 220-240 / 12VDC.		10	11,02 €
			50	10,27 €
	Length (mm): 165 Width (mm): 40 High (mm): 30 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 0~2.5 Frecuency (Hz): 50~60 Power (W): 0~30 Critical Temperature (°C): 85 Ingress Protection: IP20 Dimmable: NO Power factor: 0.95			




Subfamily **Led Power Supplies 12Vdc**

Picture	Article	Description	Lot	Price/Unit
	G503030F		1	19,01 €
	LED Power Supply CV SLT30-12VLG-Es 12V 30W		5	15,82 €
	Meets ECO Design ERP. 24Vdc constant voltage output. Efficiency 83.6%		10	14,39 €
			40	13,46 €
	Length (mm): 165 Width (mm): 40 High (mm): 30 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 0~2.5 Frecuency (Hz): 50~60 Power (W): 0~30 Room Temperature (°C): -20~+50 Critical Temperature (°C): 90 Ingress Protection: IP20 Dimmable: NO Power factor: 0.95			
				

	G5030030		1	20,98 €
	Led Power Supply CV SLT30-12VFG 12V 30W		5	19,08 €
	ECO Design ERP Compliant. Ultra flat 16mm. Output at constant tension 12Vdc. Efficiency 83.5%		10	17,34 €
			100	16,21 €
	Length (mm): 246 Width (mm): 30 High (mm): 16 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 0~2.5 Frecuency (Hz): 50~60 Power (W): 0~30 Room Temperature (°C): -20~+50 Critical Temperature (°C): 85 Ingress Protection: IP20 Dimmable: NO Power factor: 0,95			
				

LED TECHNOLOGY > Electronic Led Power Supplies > LED power supplies constant voltage

Subfamily **Led Power Supplies 12Vdc**

Picture	Article	Description	Lot	Price/Unit
	G5030040		1	14,74 €
	Led Power Supply CV Q8H 12V 40W		5	13,40 €
	ECO Design ERP Compliant. 12Vdc constant voltage output		10	12,18 €
			50	11,38 €
	Length (mm): 166 Width (mm): 52 High (mm): 24 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad In (A): 0.25 Intensidad Out (A): 0~3.3 Frecuency (Hz): 50~60 Power (W): 40 Room Temperature (°C): -20~+50 Critical Temperature (°C): 85 Life (Hours): 30000 Ingress Protection: IP20 Dimmable: NO Power factor: 0.95			




	G5030040A		1	18,17 €
	Led Power Supply AED40-12VLSTB-IP44 12V 40W		5	15,15 €
	ECO Design ERP Compliant. 12Vdc constant voltage output		10	13,77 €
			100	12,87 €
	Length (mm): 220 Width (mm): 55 High (mm): 16,5 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Frecuency (Hz): 50~60 Power (W): 0~40 Room Temperature (°C): -20~+40 Critical Temperature (°C): 80 Life (Hours): 30000 Ingress Protection: IP44 Dimmable: NO Power factor: 0.9			




LED TECHNOLOGY > Electronic Led Power Supplies > LED power supplies constant voltage

Subfamily **Led Power Supplies 12Vdc**

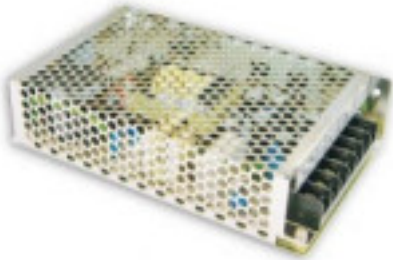Picture	Article	Description	Lot	Price/Unit
	G5030050		1	23,06 €
	LED Power Supply CV MW RS 12V 50W		10	20,38 €
	Constant tension. 115V or 230V input with selector		20	19,50 €
	Length (mm): 99 Width (mm): 97 High (mm): 36 Colour: Aluminium Voltage In (Vac): 115~230 Voltage Out (Vdc): 12 Intensidad Out (A): 4.2 Frecuency (Hz): 50~60 Power (W): 50 Critical Temperature (°C): 70 Ingress Protection: IP20			



	G5030050A		1	20,81 €
	Led Power Supply CV UT 12V 50W		5	18,92 €
	ECO Design ERP Compliant. Extra-flat. 12Vdc constant voltage output		10	17,19 €
			50	16,07 €
	Length (mm): 185 Width (mm): 62 High (mm): 22 Colour: White Voltage In (Vac): 100~240 Voltage Out (Vdc): 12 Intensidad Out (A): 0~4.16 Frecuency (Hz): 50~60 Power (W): 50 Room Temperature (°C): -20~+50 Critical Temperature (°C): 90 Life (Hours): 30000 Ingress Protection: IP20 Dimmable: NO Power factor: 0.95			




SELV




LED TECHNOLOGY > Electronic Led Power Supplies > LED power supplies constant voltage

Subfamily **Led Power Supplies 12Vdc**



Picture	Article	Description	Lot	Price/Unit
	G5030050B		1	19,06 €
	Led Power Supply CV Q8H 12V 50W		5	17,32 €
	ECO Design ERP compliant. 12Vdc constant voltage output		10	15,76 €
			50	14,72 €
	Length (mm): 184 Width (mm): 61 High (mm): 32 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 0~4.2 Frequency (Hz): 50~60 Power (W): 50 Room Temperature (°C): -20~+50 Critical Temperature (°C): 85 Life (Hours): 30000 Ingress Protection: IP20 Dimmable: NO Power factor: 0.95			





	G503050		1	40,60 €
	LED power supply CV FLAT 12V 50W		5	36,92 €
	Constant voltage. IP20 Class II		10	33,55 €
			50	31,37 €
	Length (mm): 185 Width (mm): 64 High (mm): 22 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 0~4.16 Frequency (Hz): 50~60 Power (W): 0~50 Critical Temperature (°C): 80 Ingress Protection: IP20 Dimmable: NO Power factor: 0.9 Reference: 401297			




Subfamily **Led Power Supplies 12Vdc**

Picture	Article	Description	Lot	Price/Unit
	G5030060A		1	28,80 €
	LED Power Supply CV SLT60-12VLG-E 12V 60W		5	26,20 €
	Meets ECO Design ERP. 12Vdc constant voltage output. Efficiency 87.8%		10	23,80 €
			25	22,24 €
	Length (mm): 188 Width (mm): 45 High (mm): 30 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 0~5 Frecuency (Hz): 50~60 Power (W): 0~60 Room Temperature (°C): -20~+45 Critical Temperature (°C): 90 Ingress Protection: IP20 Dimmable: NO Power factor: 0.95			
 <div style="display: flex; justify-content: space-around; align-items: center;"> ⏱ ⚠ 🏠 🔌 📏 🔄 SELV 🚫 </div>				

	G5030060B		1	39,01 €
	LED Power Supply CV SLT60-12VFG-UN 12V 60W		5	35,48 €
	Meets ECO Design ERP. Ultra-flat 16mm. 12Vdc constant voltage output. Efficiency 91.1%		10	32,25 €
			100	30,13 €
	Length (mm): 298 Width (mm): 29,8 High (mm): 16 Colour: White Voltage In (Vac): 120~240 Voltage Out (Vdc): 12 Intensidad Out (A): 0~5 Frecuency (Hz): 50~60 Power (W): 0~60 Room Temperature (°C): -20~+45 Critical Temperature (°C): 90 Ingress Protection: IP20 Dimmable: NO Power factor: 0.95			
 <div style="display: flex; justify-content: space-around; align-items: center;"> ⏱ ⚠ 🏠 🔌 📏 🔄 SELV 🚫 </div>				


LED TECHNOLOGY > Electronic Led Power Supplies > LED power supplies constant voltage

Subfamily **Led Power Supplies 12Vdc**

Picture	Article	Description	Lot	Price/Unit
	G5030060C		1	20,71 €
	Led Power Supply CV AED60-12VLSTB-IP44 12V 60W		5	18,82 €
			10	17,12 €
			50	16,00 €
	ECO Design ERP Compliant. 12Vdc constant voltage output			
	Length (mm): 238 Width (mm): 55 High (mm): 16,5 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 0~5 Frecuency (Hz): 50~60 Power (W): 0~60 Room Temperature (°C): +40 Critical Temperature (°C): 80 Ingress Protection: IP44 Dimmable: NO Power factor: 0.9			

LETARON




	G5030060D		1	20,58 €
	Led Power Supply CV Q8H 12V 60W		5	18,72 €
			10	17,03 €
			50	15,89 €
	Meets ECO Design ERP. 12Vdc constant voltage output			
	Length (mm): 184 Width (mm): 61 High (mm): 32 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 0~5 Frecuency (Hz): 50~60 Power (W): 0~60 Room Temperature (°C): -20~+50 Critical Temperature (°C): 85 Life (Hours): 30000 Ingress Protection: IP20 Dimmable: NO Power factor: 0.95			

ACTEC




LED TECHNOLOGY > Electronic Led Power Supplies > LED power supplies constant voltage

Subfamily **Led Power Supplies 12Vdc**

Picture	Article	Description	Lot	Price/Unit
	G5030060E		1	21,18 €
	Led Power Supply CV AED60-12VLSTB-UL 120Vac		5	19,25 €
	12Vdc 60W		10	17,50 €
	Constant voltage output 12Vdc		50	16,35 €
	Length (mm): 238 Width (mm): 55 High (mm): 16,5 Colour: White Voltage In (Vac): 108~135 Voltage Out (Vdc): 12 Intensidad Out (A): 5 Frecuency (Hz): 57~63 Power (W): 0~60 Room Temperature (°C): +40 Critical Temperature (°C): 80 Life (Hours): 30000 Dimmable: NO			

LETARON




	G5030060G		1	22,62 €
	Led power supply CV AED60-12VIP44-3A 12V 60W		5	18,85 €
	cable and relay		10	17,13 €
	ECO ERP Design. Constant voltage output 12Vdc. Cabling. Built-in relay		100	16,02 €
	Length (mm): 184 Width (mm): 55 High (mm): 16,5 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 5 Frecuency (Hz): 50~60 Power (W): 0~60 Room Temperature (°C): -20~+40 Critical Temperature (°C): 80 Life (Hours): 30000 Ingress Protection: IP44 Power factor: 0.90			

LETARON




LED TECHNOLOGY > Electronic Led Power Supplies > LED power supplies constant voltage

Subfamily **Led Power Supplies 12Vdc**

Picture	Article	Description	Lot	Price/Unit
	G5030060H		1	21,15 €
	Led power supply CV AED60-12V IP44-3B 12V 60W wired		5	17,63 €
			10	16,03 €
			100	14,98 €
	ECO ERP Design. Constant voltage output 12Vdc. Cabling.			
	Length (mm): 184 Width (mm): 55 High (mm): 16,5 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 5 Frecuency (Hz): 50~60 Power (W): 0~60 Room Temperature (°C): -20~+40 Critical Temperature (°C): 90 Life (Hours): 30000 Ingress Protection: IP44 Power factor: 0.90			

LETARON




	G5030075		1	39,01 €
	LED Power Supply CV SLT75-12VFG 12V 75W		5	35,48 €
			10	32,25 €
			100	30,13 €
	Meets ECO Design ERP. Ultra-flat 16.5mm. 12Vdc constant voltage output. Efficiency 91.5%			
	Length (mm): 298 Width (mm): 29,8 High (mm): 16 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 0~6.25 Frecuency (Hz): 50~60 Power (W): 0~75 Room Temperature (°C): -20~+45 Critical Temperature (°C): 90 Ingress Protection: IP20 Dimmable: NO Power factor: 0,95			

SAIF




LED TECHNOLOGY > Electronic Led Power Supplies > LED power supplies constant voltage

Subfamily **Led Power Supplies 12Vdc**

Picture	Article	Description	Lot	Price/Unit
	G5030075A		1	51,45 €
	LED Power Supply CV SLT75-12VFC-UN IP67 12V 75W		5	46,77 €
			10	42,52 €
			50	39,74 €
	Meets SLR-2021. IP67. Extra-flat. 12Vdc constant voltage output. Efficiency 90.7%. 60W (120V) 75W (240V)			
	Length (mm): 333 Width (mm): 30 High (mm): 16,5 Colour: Grey Voltage In (Vac): 120~240 Voltage Out (Vdc): 12 Intensidad Out (A): 0~6.25 Frecuency (Hz): 50~60 Power (W): 0~75 Room Temperature (°C): -20~+50 Critical Temperature (°C): 75 Ingress Protection: IP67 Power factor: 0.95			




	G503075		1	22,63 €
	Alimentador ALED CV 75W DC 12V LARGE		10	18,99 €
			30	18,41 €
	Constant voltage, class II, IP 20			
	Length (mm): 200,8 Width (mm): 63 High (mm): 30 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Frecuency (Hz): 50~60 Power (W): 75 Critical Temperature (°C): 80			
	Reference: 401290			




LED TECHNOLOGY > Electronic Led Power Supplies > LED power supplies constant voltage

Subfamily **Led Power Supplies 12Vdc**

Picture	Article	Description	Lot	Price/Unit
	G503075A		1	30,78 €
	LED power supply CV 12V 75W		5	27,98 €
	Constant voltage. IP20 Class II		10	25,44 €
			50	23,79 €
	Length (mm): 180 Width (mm): 52 High (mm): 30 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 6.25 Frecuency (Hz): 50~60 Power (W): 0~75 Critical Temperature (°C): 85 Ingress Protection: IP20 Dimmable: NO Power factor: 0.9 Reference: 401364			




	G5030100A		1	45,96 €
	LED Power Supply CV SLT100-12VFG 12V 100W		5	41,78 €
	Meets ECO Design ERP. Ultra-flat 16.5mm. 12Vdc constant voltage output. Efficiency 92%		10	37,97 €
			50	35,49 €
	Length (mm): 298 Width (mm): 29,8 High (mm): 16 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 0~8 Frecuency (Hz): 50~60 Power (W): 0~96 Room Temperature (°C): -20~+45 Critical Temperature (°C): 90 Ingress Protection: IP20 Dimmable: NO Power factor: 0.95			




LED TECHNOLOGY > Electronic Led Power Supplies > LED power supplies constant voltage

Subfamily **Led Power Supplies 12Vdc**

Picture	Article	Description	Lot	Price/Unit
	G5030100B		1	48,30 €
	LED Power Supply CV SLT100-12VL-E 12V 100W		5	43,90 €
	Complies with SLR-2021. 12Vdc constant voltage output. Efficiency 88.5%		10	39,91 €
			30	37,31 €
	Length (mm): 185 Width (mm): 60 High (mm): 31 Colour: White Voltage In (Vac): 220~240 Voltage Out (Vdc): 12 Intensidad Out (A): 0~8.5 Frecuency (Hz): 50~60 Power (W): 0~100 Room Temperature (°C): -20~+40 Critical Temperature (°C): 80 Ingress Protection: IP20 Power factor: 0,95			

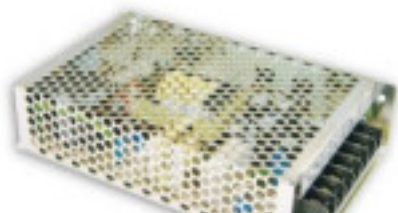

	G5030102		1	41,59 €
	LED power supply CV MW RS 12V 100W		10	34,66 €
	Constant voltage. Input 88-264VAC		30	33,01 €
	Length (mm): 159 Width (mm): 97 High (mm): 38 Colour: Aluminium Voltage In (Vac): 88~264 Voltage Out (Vdc): 12 Intensidad Out (A): 8.5 Frecuency (Hz): 50~60 Power (W): 100 Room Temperature (°C): -20~+70 Critical Temperature (°C): 70 Ingress Protection: IP20 Dimmable: NO			

