

GTC80700 - 122213

Led Driver CC MP 80-700 SLIM multi-current up to 700mA 80W

December 04th, 2024, 09:04



DESCRIPTION

Led Power Supply Linear to incorporate with constant multi-current output selectable by DIP switch. High efficiency 93%. Output current from 325mA to 700mA. Protection against open circuit, short circuit, over load and over temperature. Warranty 7 years (3% failure ratio) 10 years (5% failure ratio). TCI Code 122213

PRICE

Lot	P.V.P. excluding VAT
1	17,15€
5	15,59€
10	14,17€
72	13,12€

Continued on next page >>

GTC80700 - 122213


Led Driver CC MP 80-700 SLIM multi-current up to 700mA 80W

TECHNICAL SPECIFICATIONS

SYMBOLS



CERTIFICADOS

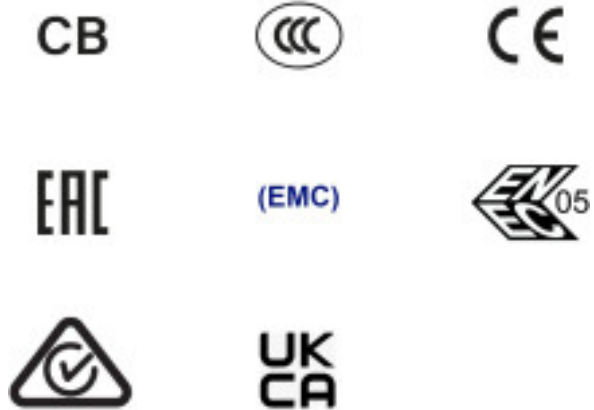

Weight: 140 Grams

Packging: Box 72 Units











NOTES

ECO ERP Directives. DIP-SWITCH selectable output current from 325mA to 700mA

OTHER FEATURES

Length (mm): 280	Width (mm): 30
High (mm): 21	Voltage In (Vac): 220~240
Intensidad Out (A): 0.325~0.7	Frecuency (Hz): 50~60
Power (W): 10~80	Room Temperature (°C): -25~+50
Critical Temperature (°C): 85	Ingress Protection: IP20
Dimmable: NO	Power factor: 0.95

DOCUMENTS

-  [Data Sheet](#)
-  [Led Driver CC MP 80-700 SLIM multi-current up to 700mA 80W](#)
-  [CB](#)
-  [CCC \(China\)](#)
-  [CE](#)
-  [EAC \(RUSIA\)](#)
-  [Electromagnetic compatibility](#)
-  [ENEC \(Netherlands\)](#)
-  [Regulatory Compliance Mark for Australia](#)
-  [UKCA](#)